


Product Specifications

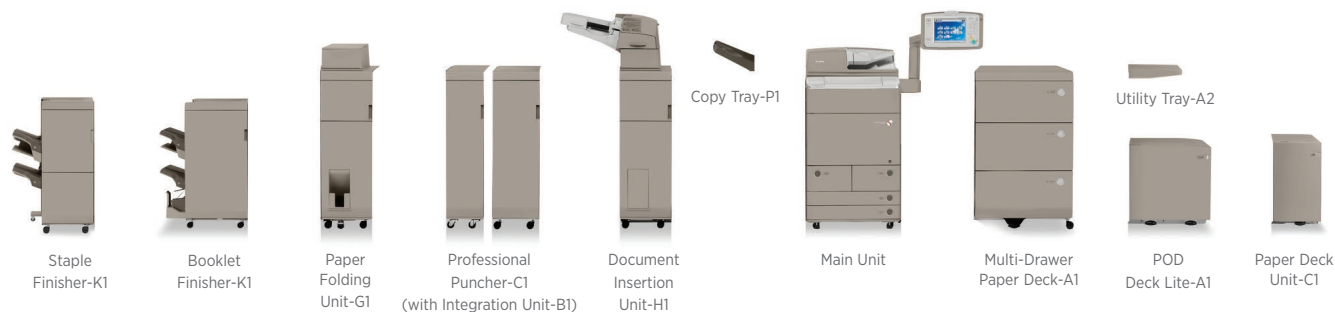

Main Unit

System Type

Color Digital Multifunction Imaging System

Functions

Standard: Copy, Print (UFR II), Scan, Send, Store
 Optional: Print (PCL 5c/6, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

Operation Panel

10.4" SVGA Full-Color, TFT Upright Screen

Memory

Standard: 2GB RAM
 Maximum: 2.5GB RAM

Hard Disk Drive

Standard: 160GB
 Maximum: 1TB

Mirroring Hard Disk Drive

Optional (160GB, 1TB), Method: RAID1

Network Interface Connection

Standard: 10Base-T/100Base-TX/1000Base-T
 Optional: Wireless LAN (IEEE 802.1x via third-party adapter)

Other Interface

Standard: USB 2.0 (Host) x2, USB 2.0 (Device)
 Optional: Device Port [USB 2.0 (Host) x2], Serial Interface, Copy Control Interface

Copy/Print Speed (BW/Color)

Letter:	C9280:	Up to 80/70 ppm
	C9270:	Up to 70/65 ppm
Legal:	C9280:	Up to 47/41 ppm
	C9270:	Up to 41/38 ppm
11" x 17":	C9280:	Up to 40/35 ppm
	C9270:	Up to 35/32 ppm

First-Copy-Out Time (Letter)

C9280:	BW:	4.4 Seconds
	Color:	6.0 Seconds
C9270:	BW:	4.9 Seconds
	Color:	6.6 Seconds

Paper Sources (20 lb. Bond)

Standard: Dual 1,100-sheet Paper Drawers, Dual 550-sheet Paper Cassettes, 100-sheet Stack Bypass
 Optional: 3,500-sheet Paper Deck Unit, 3,500-sheet POD Deck Lite, or 6,000-sheet Multi-Drawer Paper Deck
 Maximum: 9,300 Sheets (with Optional Multi-Drawer Paper Deck)

Output Paper Capacity (20 lb. Bond)

4,250 Sheets (with Staple Finisher or Booklet Finisher)

Acceptable Paper Sizes

Drawers: Letter
 Cassette: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")
 Bypass: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")

Acceptable Paper Weights

Drawers/
 Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220g/m²)
 Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)

Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Up to 13" x 19")
 Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m²)

Media Support

Thin [14 lb. Bond to 16 lb. Bond (52 to 63g/m²)], Plain 1 [17 lb. Bond to 21 lb. Bond (64 to 81g/m²)], Plain 2 [22 lb. Bond to 28 lb. Bond (82 to 105g/m²)], Heavy 1 [29 lb. Bond to 40 lb. Bond (106 to 150g/m²)], Heavy 2 [56 lb. Cover to 80 lb. Cover (151 to 220g/m²)], Heavy 3 [82 lb. Cover to 140 lb. Index (221 to 256g/m²)], Heavy 4 [140 lb. Index to 110 lb. Cover (257 to 300g/m²)], Color, Recycled, Pre-Punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes

Warm-up Time

From Power On: 31 Seconds or Less
 From Sleep: 30 Seconds or Less
 Quick Startup Mode: 7 Seconds*

Power Requirements/Plug

208V AC, 60Hz, 12A/NEMA 6-15P

Power Consumption

Maximum: 2.5kW
 Sleep Mode: 0.9W or Less

Dimensions (H x W x D)

55-1/4" x 46-1/2" x 36-3/4"***

Installation Space (W x D)

63" x 36-3/4"

Weight

Approx. 615 lb. (279kg)***

Toner (Estimated Yield @ 5% Coverage)

Black: 72,000 Images
 Color (C,M,Y): 54,000 Images

Image Reader Unit

Scan Resolution: Up to 600 x 600 dpi

Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2kg)]

Maximum Original Size: Up to 11" x 17"

Main Unit (continued)

Document Feeder

Scan Method

Single-Pass Duplexing Automatic Document Feeder

Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Paper Weights: 1-sided scanning:
13 lb. Bond to 80 lb. Cover (50 to 220g/m²)
2-sided scanning (Black-and-white original):
13 lb. Bond to 80 lb. Cover (50 to 220g/m²)
2-sided scanning (Color original):
17 lb. Bond to 80 lb. Cover (64 to 220g/m²)

Scan Speed (BW/Color; Letter)

Simplex: Up to 120/120 ipm (300 dpi)
Up to 120/70 ipm (600 dpi)
Duplex: Up to 200/140 ipm (300 dpi)
Up to 120/70 ipm (600 dpi)

Paper Capacity (20 lb. Bond): 300 Sheets

Copy Specifications

First-Copy-Out Time (Letter)

C9280: BW: 4.4 Seconds
Color: 6.0 Seconds
C9270: BW: 4.9 Seconds
Color: 6.6 Seconds

Multiple Copies: 1 to 9,999

Copy Exposure: Automatic or Manual (9 Levels)

Magnification: 25% - 400% (1% Increments)

Preset Reductions: 25%, 50%, 64%, 73%, 78%

Preset Enlargements: 121%, 129%, 200%, 400%

Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-sided, Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet, Transparency Interleaving, Shift, Margin, Frame Erase, Image Combination, Different-size Original, Job Build, Job Done Notice, Scan Image Check, Mode Memory, Recall, Negative/Positive Inversion, Image Repeat, Mirror Image, Sharpness, Tab Paper Creation, Form Composition, Secure Watermark, Page Numbering, Copy Set Numbering, Watermark and Date, Job Block Combination, Store in User Inbox

Print Specifications

Processor

Canon Dual Custom Processor (Shared)

Memory

Standard: 2GB RAM
Maximum: 2.5GB RAM

Hard Disk Drive

Standard: 160GB
Maximum: 1TB

Engine Resolution: 1200 x 1200 dpi

PDL Support

Standard: UFR II
Optional: PCL 5c/6, Adobe PS 3

Print Driver Supported OS

UFR II, PCL 5c/6, Adobe PS 3:
Windows* (XP/Windows Vista*/7/8), Windows Server (2003/2008/2008 R2/SBS 2011/2012), Windows Terminal Servers (Server 2003/Server 2008/Server 2008 R2/2012), Microsoft* Clustering Server (Server 2003/Server 2003 R2/Server 2008/Server 2008 R2), Citrix (Presentation Server 4.5, Xen App 5.0/6.0/6.5, Xen Desktop 4.0/5.0/5.5/5.6), Macintosh* (OS X 10.5.8 or later, UFR II and PS 3 only), VMware, SAP (PS and PCL Only)

Direct Print Support

Standard: TIFF, JPEG
Optional: PDF, EPS,* XPS**

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secure Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Black-and-White Printing, Objective, Color/Black-and-White Auto Detect, Toner Reduction, Poster Printing

Scan Specifications

Network TWAIN Scan: Standard

Network Scan Utility: Color Network ScanGear

Universal Send Specifications

Sending Method

E-mail, I-Fax, File Server (FTP, SMB, WebDAV), Mail Box, Super G3 Fax (Optional)

Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black), Full Color, Grayscale, BW

Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100 dpi

Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-touch Buttons)

Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV
E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF (Searchable), PDF (Apply Policy), PDF (Optimize for Web), PDF/XPS (OCR), PDF/A-1b, XPS, XPS (Compact), OOXML (.pptx and .docx)
Optional: PDF (Trace & Smooth), PDF (Encrypted), PDF/XPS (Digital Signature), PDF (Reader Extensions)

I-Fax Data Format

Color: .tfx (JPEG)
BW: .tif (MH, MR, MMR)

Universal Send Features

Two-sided Original, Different-size Originals, Original Type Selection, Book to Two Pages, Density Adjustment, Sharpness, Document Name, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, Sender's Name (TTI), E-mail Priority

Fax Specifications

Maximum Number of Connection Lines: 4

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps

Compression Method: MH, MR, MMR, JBIG

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size: Statement-R to 11" x 17"

Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type Selection, Two-sided Original, Book to Two Pages

Store Specifications

Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox,
50 Confidential Fax Inboxes
6,000 Maximum Pages Stored

Advanced Box

Available: Approx. 15GB (Standard HDD)
Disk Space: Approx. 629GB (1TB HDD)

Communication

Protocol: SMB or WebDAV
Supported Client PC: Windows (Windows 2000/XP/7/8/Windows Vista)

Concurrent Connections

(Max.): SMB: 32, WebDAV: 12 (Active Sessions)
Advanced Disabling Advanced Box, Storage Filtering,
Box Features: Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB Memory
Optional: SD, SDHC, CompactFlash, Memory Stick, Microdrive

Security Specifications

Standard

Department ID Management, Single Sign-On H, Access Management System (Device and Function Level Log-in), Secure Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPv6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Erase (Up to 3x), HDD Initialize (Up to 9x), HDD Lock, IPsec, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional

Removable HDD, HDD Encryption, HDD Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, Secure Watermark, IEEE 2600.1 Common Criteria Certification*

Environmental Information

ENERGY STAR® Qualified

EPEAT® Gold

EU RoHS Compliant

Ecomark

Blue Angel

WEEE Directive

Optional Accessories

Paper Supply Options

Paper Deck Unit-C1

Paper Capacity: 3,500 Sheets [20 lb. Bond (80g/m²)]
 Number of Drawers: 1
 Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m²)
 Acceptable Paper Size: Letter
 Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched
 Power Source/Max. Power Consumption: From Main Unit/Approx. 44W
 Dimensions (H x W x D): 22-1/2" x 12-3/4" x 23" (570mm x 323mm x 583mm)
 Weight: Approx. 81.6 lb. (37kg)

POD Deck Lite-A1

Paper Capacity: 3,500 Sheets [20 lb. Bond (80g/m²)]
 Number of Drawers: 1
 Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)
 Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R
 Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Labels, Bond, Letterhead, Textured, Coated
 Power Source/Max. Power Consumption: 120-127V AC, 60Hz, 2.4A/Approx. 263W
 Dimensions (H x W x D): 22-1/2" x 23-5/8" x 24-1/2" (570mm x 601mm x 621mm)
 Weight: Approx. 110 lb. (50kg)

Multi-Drawer Paper Deck-A1

Paper Capacity: 6,000 Sheets [20 lb. Bond (80g/m²)]
 Number of Drawers: 3 (2,000 Sheets each)
 Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)
 Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")
 Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Labels, Bond, Letterhead, Tab, Textured, Coated
 Power Source/Max. Power Consumption: 120-127V AC, 60Hz, 4A/Approx. 753W
 Dimensions (H x W x D): 41" x 37-3/8" x 31-3/8" (1040mm x 950mm x 797mm)
 Weight: Approx. 331 lb. (150kg)

Output Options

Copy Tray-P1

Total Output Capacity: Up to 250 Sheets [20 lb. Bond (80g/m²)]
 Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)
 Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")
 Dimensions (H x W x D): 6-7/8" x 16-1/2" x 15" (175mm x 420mm x 382mm)
 Weight: Approx. 2.9 lb. (1.3kg)

Booklet Finisher-K1

Number of Trays: 3
 Total Output Capacity: 4,250 Sheets (Letter)
Tray A: 1,500 Sheets (Letter, Executive, Statement-R), 750 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter-R)
Tray B: 250 Sheets (Letter, Statement-R), 125 Sheets (11" x 17", Legal, Letter-R, Executive), 30 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18")
Tray C: 2,500 Sheets (Letter), 1,500 Sheets (Executive, Statement-R), 750 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter-R)

Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)
 Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes
 Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")
 Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive
Saddle-Stitch: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter-R, Custom Size [8-1/4" x 11" to 13" x 19-1/4" (210.0 mm x 279.3 mm to 330.2 mm x 487.7 mm)]

Maximum Stapling Capacity: **Letter and Executive:** 100 Sheets [20 lb. Bond (80g/m²)] or up to 1/2" (11mm) for heavier paper
11" x 17", Legal, and Letter-R: 50 Sheets [20 lb. Bond (80g/m²)] or up to 1/4" (5.5mm) for heavier paper

Paper Capacity of Staple Mode: **Tray A and Tray C:** 1,500 Sheets/100 Sets (Letter, Executive), 750 Sheets/50 Sets (11" x 17", Legal, Letter-R)

Maximum Saddle-Stitch Capacity: 20 Sheets [21 lb. Bond (81g/m²), including 1 Cover Sheet up to 110 lb. Cover (300g/m²)]

Paper Capacity of Saddle-Stitch Mode: 1 to 5 Sheets/25 Sets, 6 to 10 Sheets/15 Sets, 11 to 16 Sheets/10 Sets, 17 to 20 Sheets/5 Sets

Type of Staple: Staple-N1 (5,000 x 3), Staple-P1 (5,000 x 2)

Power Source/Max. Power Consumption: 100-240V AC, 50/60Hz, 2.8A/Approx. 380W (including the Puncher Unit-BF1 and Inner Booklet Trimmer-A1)
 Approx. 349W (excluding the Puncher Unit-BF1 and Inner Booklet Trimmer-A1)

Dimensions (H x W x D): 41" x 30-1/4" (35-1/4"*) x 30-1/8" (1040mm x 767mm (896mm**)) x 765mm

Weight: Approx. 243 lb. (110kg)

Staple Finisher-K1

Number of Trays: 3
 Total Output Capacity: 4,250 Sheets (Letter)
Tray A: 1,500 Sheets (Letter, Executive, Statement-R), 750 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter-R)
Tray B: 250 Sheets (Letter, Statement-R), 125 Sheets (11" x 17", Legal, Letter-R, Executive), 30 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18")
Tray C: 2,500 Sheets (Letter), 1,500 Sheets (Executive, Statement-R), 750 Sheets (13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter-R)

Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)
 Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes

Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")

Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive

Maximum Stapling Capacity: **Letter and Executive:** 100 Sheets [20 lb. Bond (80g/m²)] or up to 1/2" (11mm) for heavier paper
11" x 17", Legal, and Letter-R: 50 Sheets [20 lb. Bond (80g/m²)] or up to 1/4" (5.5mm) for heavier paper

Paper Capacity of Staple Mode: **Tray A and Tray C:** 1,500 Sheets/100 Sets (Letter, Executive), 750 Sheets/50 Sets (11" x 17", Legal, Letter-R)

Type of Staple: Staple-N1 (5,000 x 3)

Power Source/Max. Power Consumption: 100-240V AC, 50/60Hz, 2.8A/Approx. 286W (including the Puncher Unit-BF1)
 Approx. 282W (excluding the Puncher Unit-BF1)

Dimensions (H x W x D): 41" x 25-3/4" (30-3/4"*) x 30-1/8" (1040mm x 654mm (782mm**)) x 765mm

Weight: Approx. 141 lb. (64kg)

Optional Accessories (continued)

Output Options (continued)

Puncher Unit-BF1*

Acceptable Punch Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256g/m²)

Acceptable Punch Paper Type: Thin, Plain, Heavy, Color, Recycled, Bond, Letterhead, Tab, Textured, Coated

Acceptable Punch Paper Size: 11" x 17", Legal, Letter, Letter-R, Executive

Acceptable Punch Paper Type: 2 Holes (Legal, Letter-R)
3 Holes (11" x 17", Letter, Executive)

Distance Between Punch Holes: **2 Holes:** 2-3/4" (70mm)
3 Holes: 4-1/4" (108mm)

Punch Waste Tray Capacity: Approx. 5,000 Sheets [20 lb. Bond (80g/m²)]

Power Source: From the Finisher

Dimensions (H x W x D): Inside the Finisher [15-1/2" x 3-3/4" x 28-1/8" (392mm x 95mm x 715mm)]

Weight: Approx. 8.2 lb. (3.7kg)

Inner Booklet Trimmer-A1**

Trimming Method: Face Trim

Trim Thickness: Up to 20 Sheets/40 Sheets when folded (2-20mm)

Waste Tray Capacity: Approx. 1,500 Sheets of trimmed strip [width 3/4" (20mm), Letter, 20 lb. Bond (80g/m²)]

Acceptable Paper Weight: 16 lb. Bond to 110 lb. Cover (60 to 300g/m²)

Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Bond, Letterhead, Textured, Coated

Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", 13" x 19-1/4"

Power Source: From the Finisher

Dimensions (H x W x D): Inside the Finisher [15-7/8" x 9-7/8" x 24-5/8" (403mm x 251mm x 625mm)]

Weight: Approx. 70.5 lb. (32kg)

Document Insertion Unit-H1***

Acceptable Media: Covers and Inserts

Number of Trays: 2

Tray Capacity: **Upper/Lower Tray:** 200 Sheets [20 lb. Bond (80g/m²)] x 2

Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m²)

Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Tracing, Bond, Letterhead, Tab, Textured, Coated

Acceptable Paper Sizes: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Custom Size (7-1/8" x 7-1/8" to 13" x 19-1/4")

Power Source/Max. Power Consumption: 100-240V AC, 50/60Hz, 2.8A/Approx. 103W

Dimensions (H x W x D): 55-3/8" x 29-3/8" x 31-1/4" (1407mm x 746mm x 793mm)

Weight: Approx. 134 lb. (61kg)

Professional Puncher-C1/Professional Puncher Integration Unit-B1***

Acceptable Punch Paper Weight: **LTR (3-hole, 5-hole, Velo Bind 11-hole, Plastic Comb 19-hole, Twin Loop 21/32-hole, Color Coil 44-hole):** 20 lb. Bond to 80 lb. Cover (75 to 216g/m²)
LTR (ProClick 32-hole): 20 lb. Bond to 65 lb. Cover (75 to 176g/m²)

Acceptable Punch Paper Type: Thin, Plain, Heavy, Color, Recycled, Tab, Coated

Acceptable Punch Paper Size: Letter

Punch Pattern: Plastic Comb (19-hole), Twin Loop (21/32-hole), Color Coil (44-hole), Velo Bind (11-hole), Loose Leaf (3/5-hole), ProClick (32-hole)

Punch Waste Tray Capacity: Approx. 25,000 Sheets

Power Source/Max. Power Consumption: **Professional Puncher-C1:** From the Professional Puncher Integration Unit-B1/Approx. 300W
Professional Puncher Integration Unit-B1: 120-127V AC/5.5A-60Hz/Approx. 135W

Dimensions (H x W x D): **Professional Puncher-C1:** 41" x 12" x 31-1/4" (1040mm x 305mm x 792mm)
Professional Puncher Integration Unit-B1: 41" x 9-7/8" x 31-1/4" (1040mm x 250mm x 792mm)

Weight: **Professional Puncher-C1:** Approx. 176 lb. (80kg)
Professional Puncher Integration Unit-B1: Approx. 88.2lb (40kg)

Paper Folding Unit-G1***

Folding Method: Roller Pressure Folding

Folding Type: Z-Fold, C-Fold, Accordion Z-Fold, Double-Parallel Fold, Half-Fold

Acceptable Paper Weight: **Z-Fold, C-Fold, Accordion Z-Fold, Half-Fold:** 14 lb. Bond to 28 lb. Bond (52 to 105 g/m²)
Double-Parallel Fold: 14 lb. Bond to 24 lb. Bond (52 to 90g/m²)

Acceptable Paper Type: Thin, Plain, Color, Recycled, Bond

Acceptable Paper Sizes: **Z-Fold:** Letter-R, Legal, 11" x 17"
C-Fold, Accordion Z-Fold, Half-Fold: Letter-R
Double-Parallel Fold: Letter-R, Legal

Power Source/Max. Power Consumption: From the Finisher/Approx. 132W

Dimensions (H x W x D): 46-7/8" x 13-1/4" x 31-1/4" (1190mm x 336mm x 793mm)

Weight: Approx. 157 lb. (71kg)

Additional Print Controller Options

imagePASS-A2 Controller

Type: Embedded

Processor: Intel® Pentium® Processor E5300 2.6GHz

System: Fiery® System 10e

PDL Support: Adobe PS 3, PCL 5c/6

Print Resolution: 1200 x 1200 dpi
2400 dpi Equivalent x 600 dpi

Memory: 2GB

HDD: 160GB

Interface (to LAN): 10Base-T/100Base-TX/1000Base-T

Dimensions (H x W x D): 11-3/5" x 14-2/5" x 3-2/3" (295mm x 366mm x 93mm)

Utility Software: • imagePASS-A2 Driver
• Command WorkStation® 5
• Remote Scan 5.3
• Web Tools

Standard Features: • Hot Folder
• Secure Erase
• Paper Catalog
• Virtual Printers

Options: • SeeSequence Suite
• SeeSequence Impose
• SeeSequence Compose
• Image Enhance Visual Editor
• X-Rite Eye-One

ColorPASS-GX400 Controller

Type: External

Processor: Intel® Core™ i5-660 Processor 3.33GHz

System: Fiery® System 10

PDL Support: Adobe PS 3

Print Resolution: 1200 x 1200 dpi
2400 dpi Equivalent x 600 dpi

Memory: 2GB

HDD: 500GB

Interface (to LAN): 10Base-T/100Base-TX/1000Base-T

Dimensions (H x W x D): 19-15" x 8-1/2" x 19" (485mm x 215mm x 483mm)

Utility Software: • ColorPASS GX-400 Driver
• Command WorkStation® 5
• Remote Scan 5.3
• Web Tools

Standard Features: • Hot Folder
• Secure Erase
• Paper Catalog
• Virtual Printers
• Fiery Graphics Arts Package
• Image Enhance Visual Editor
• VDP Enhancement

Options: • SeeSequence Suite
• SeeSequence Impose
• SeeSequence Compose
• Removable Hard Disk Drive
• Integration Interface and Stand (19" display, keyboard, mouse, and furniture stand)
• X-Rite Eye-One

Optional Accessories (continued)

Other Optional Accessories

- Utility Tray-A2
- USB Keyboard (Cherry)
- Universal Keyboard Stand-A1
- Copy Card Reader-F1*
- Braille Label Kit-F1
- ADF Access Handle-A1
- Convenience Stapler-B1
- PCL Printer Kit-AS1
- PCL International Font Set-A1**
- PS Printer Kit-AS1***
- Direct Print Kit (for PDF/XPS)-H1***
- Encrypted Secure Print Software-D1
- Barcode Printing Kit-D1**
- Web Access Software-H1**
- Universal Send Advanced Feature Set-F1
- Universal Send Security Feature Set-D1
- Universal Send Digital User Signature Kit-C1
- Super G3 Fax Board-AD2
- Super G3 2nd Line Fax Board-AD1**
- Super G3 3rd/4th Line Fax Board-AE1*
- Remote Fax Kit-A1**
- Secure Watermark-B1
- Silex Wireless Bridge SX-2500CG
- USB Device Port-A2
- Multimedia Reader/Writer-A2***
- Additional Memory Type D (512MB)
- Document Scan Lock Kit-B1
- HDD Data Encryption and Mirroring Kit-C7
- HDD Data Erase Scheduler
- Removable HDD Kit-AH1
- 2.5-inch/160GB HDD-G1
- 2.5-inch/1TB HDD-L1
- Voice Guidance Kit-F2□
- Voice Operation Kit-C2□
- Remote Operator's Software Kit-B1
- Copy Control Interface Kit-A1□□

- * If "Quick Startup Settings for Main Power" is set to ON, it takes 7 seconds until the key operation on the touch-panel display is available after turning on the main power.
 - ** To the right edge of the Upright Control Panel in the right-most position.
 - *** Including the toner bottle, Duplex Color Image Reader, and the Upright Control Panel.
 - † EPS can be printed directly only from Remote User Interface.
 - †† XPS cannot be printed directly from the Web Access software.
 - ▲ Will be available Q4 2013.
 - ▲▲ When the Auxiliary Tray is extended.
 - ▼ Installs internally with Staple Finisher-K1 or Booklet Finisher-K1.
 - ▼▼ Installs internally with Booklet Finisher-K1.
 - ▼▼▼ Requires Staple Finisher-K1 or Booklet Finisher-K1.
 - Requires the Copy Card Reader Attachment Kit-A2.
 - Requires PCL Printer Kit-AS1.
 - Requires Additional Memory Type D (512MB).
 - Requires Direct Print Kit-H1 for printing PDF files.
 - Requires Super G3 Fax Board-AD2.
 - Requires Super G3 2nd Line Fax Board-AD1.
 - Cannot be installed with Super G3 Fax Board-AD2.
 - Requires USB Device Port-A2.
 - Voice Guidance Kit-F2 and Voice Operation Kit-C2 cannot be installed together.
 - Cannot be installed with Copy Card Reader-F1.
- NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.



1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Park
Melville, NY 11747

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGERUNNER, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Specifications and availability are subject to change without notice. Some items may not be available at this time; please check for availability. All printer output images are simulated.

©2013 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

