

HOOD SIZING		
W x L	DIMENSIONAL SIZE	METRIC DIMENSIONAL SIZE
2 x 2	23-5/8" x 23-5/8"	600.08 mm x 600.08 mm
2 x 3	23-5/8" x 35-5/8"	600.08 mm x 904.88 mm
2 x 4	23-5/8" x 47-5/8"	600.08 mm x 1209.68 mm

ITEM	HOOD SIZE	QTY
1		
2		
3		
4		
5		
6		
EX.	2 x 2	2

REV	ECN #	DESCRIPTION	BY	DATE
-----	-------	-------------	----	------

#### DAMPER

BUTTERFLY  
TELESCOPING DISC  
NONE

#### INLET SIZE

Ø 8" [203.2mm] ROUND  
Ø 10" [254mm] ROUND  
Ø 12" [304.8mm] ROUND  
Ø 14" [355.6mm] ROUND

#### GRILLE TYPE


PERF STAINLESS STEEL (316L)  
PAINTED COLD ROLLED STEEL - WHITE

#### INSULATION


NONE  
2" [50.8mm] FOILBACK - TOP & SIDES  
2" [50.8mm] FOILBACK - TOP ONLY

#### FINISH


NONE  
POWDER COATED - WHITE

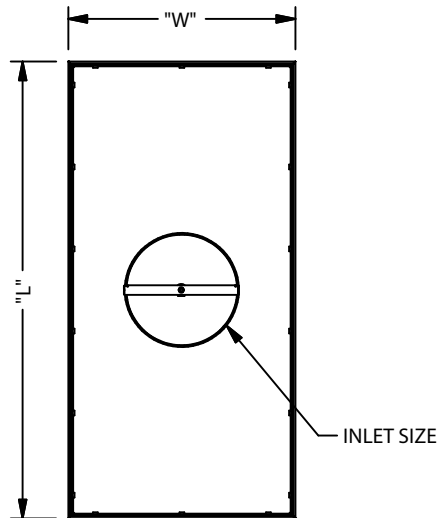

TOP VIEW

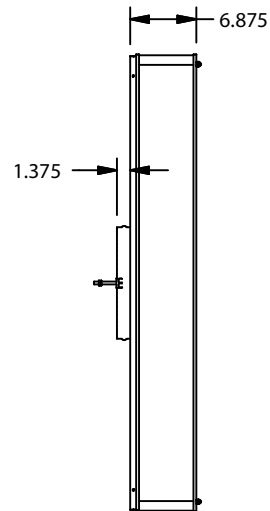


SIDE VIEW

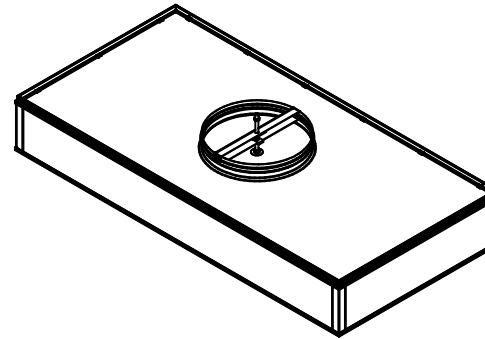

ISOMETRIC VIEW  
TELESCOPING DISC  
SHOWN

APPLICABLE INLET SIZES	
HOOD SIZE	DUCT SIZE
2 x 2	8" [203.2mm]/10" [254mm]
2 x 3	10" [254mm]/12" [304.8mm]
2 x 4	10" [254mm]/12" [304.8mm]/14" [355.6]

**\*\*AstroHood to be constructed from Anodized Aluminum Extrusion.**

<b>CUSTOMER APPROVAL</b> DRAWINGS MUST BE SIGNED IN ORDER TO PROCEED WITH PRODUCTION. <input type="checkbox"/> APPROVED <input type="checkbox"/> APPROVED AS NOTED <input type="checkbox"/> NOT APPROVED					
SIGNATURE: _____		DATE: _____			
COMMENTS: _____					
QUOTE NO.: _____					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:					
FRACTIONS X/X ±1/8 DECIMALS X.XX ±0.13 DIAGONALS ±1/8		TITLE: AstroHood S3 RSR			
DRAWN BY rwalston	CHECKED BY	APPROVED BY	SHEET 1 OF 1	SHEET SIZE A	SCALE 1 / 20
DATE 10/16/2019	DATE	DATE	DRAWING NUMBER 600-00013		
THE INFORMATION CONTAINED ON THIS DRAWING IS PROPRIETARY TO AAF AND MAY NOT BE USED, REPRODUCED NOR TRANSMITTED TO OTHER PARTIES WITHOUT EXPRESSED WRITTEN CONSENT OF AAF.					