


ROLL-OFF OCTAGON COMPACTOR CONTAINERS

Features & Benefits:

- ▼ Special attention in design and construction given to the floor, front and door, three areas subject to the most abuse, to ensure strength and long life.
- ▼ Floor constructed of 7 gauge steel plate backed with 3" structural steel channel.
- ▼ Container sides constructed of 7 gauge steel plate.
- ▼ 8 5/8" (219mm) diameter ground rollers.
- ▼ Longitudinal sills made of 2" x 6" structural steel tubing.
- ▼ Door reinforced with 3" structural steel channels, deep box sections of 7 gauge plate and 3/4" x 4" bar stock hinges.
- ▼ Hinges, guide rollers and ground rollers equipped with grease fittings for extended life.
- ▼ Understructures available to fit most roll-off hoists.
- ▼ 46 3/8"H x 64" W standard door opening. Other sizes optional.

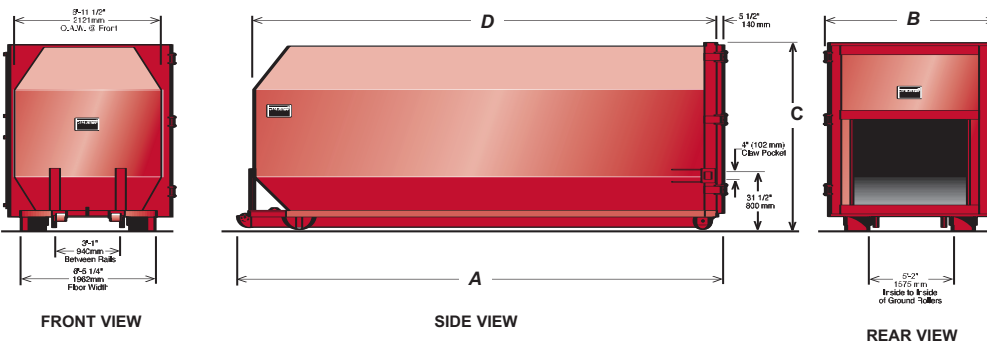

Compatible with Marathon's extensive line of compactors and most competitive models.

Options:

- ▼ Front Ground Rollers
- ▼ Canvas Door Covers
- ▼ 1/4" Floor

Authorized Distributor:

Model No.	A	B	C	D	Capacity	Max Force Rate	Weight (Approx.)
RJ-43 OC	23'-8 1/2" 7226mm	8'-0" 2438mm	8'-8" 2642mm	22'-5 1/2" 6845mm	43 cy 33m ³	80,000 lbf 355.8 kN	7200 lb 3266 kg
RJ-40 OC	22'-2" 6756mm	8'-0" 2438mm	8'-8" 2642mm	20'-11" 6375mm	40 cy 31m ³	80,000 lbf 355.8 kN	6700 lb 3039 kg
RJ-40 OC/VL	22'-2" 6756mm	8'-0" 2438mm	8'-8" 2642mm	20'-11" 6375mm	40 cy 31m ³	70,000 lbf 311.3 kN	5600 lb 2540 kg
RJ-40 OC/XHD	22'-2" 7010mm	8'-0" 2438mm	8'-8" 2642mm	20'-11" 6375mm	40 cy 31m ³	120,000 lbf 533.7.3 kN	7900 lb 3583 kg
RJ-30 OC	16'-11 1/2" 5169mm	8'-0" 2438mm	8'-8" 2642mm	15'-5 1/2" 4712mm	30 cy 23m ³	80,000 lbf 355.8 kN	5500 lb 2495 kg



MARATHON EQUIPMENT COMPANY

P.O. Box 1798 • Vernon, AL 35592-1798 USA • (205) 695-9105 fax (205) 695-7250 **1-800-633-8974**
 130 Hwy. 339 • Yerington, NV 89447 USA • (775) 463-4030 fax (775) 463-4531 **1-800-624-5724**
 1102 Industrial Park Rd. • Clearfield, PA 16830 USA • (814) 765-0200 fax (814) 765-2072 **1-800-922-7062**

Visit our web site: www.MarathonEquipment.com

Specifications are subject to change without notice in order to accommodate improvements to the equipment. Pictures in this literature are illustrative only. Products must be used with safe practice and in accordance with said regulations and standards.

