

CONTACT US @ 855-355-2724 E-Mail: Sales@brahelectric.com www.Brahelectric.com

## **PRODUCT DATA SHEET**




MOTOR STARTER OVERLOAD RELAY PART NO. BLR2D3359

<u>PART NUMBER – BLR2D3359</u>: BRAH Electric, aftermarket direct replacement solid state overload relays for Telemecanique LR2D3359, TeSys D Series, type LR2D, 3P, rated for 48.00 - 65.00A, 600V, suitable for use with 50 - 95A LC1D and LC2D contactors

## **PRODUCT SPECIFICATIONS**

TYPE	VALUE (UNITS)	NOTES	COMMENTS
PHASE	3		
POLES	3		
AMPERAGE MIN	48.00 (A)		
AMPERAGE MAX	65.00 (A)		
VOLTAGE RATING	600V AC		
TRIP CURRENT	125% OF DIAL SETTING		
SUITABLE FOR USE WITH	50 - 95A LC1D and LC2D contactors		
RELAY STYLE		SOLID STATE	

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.

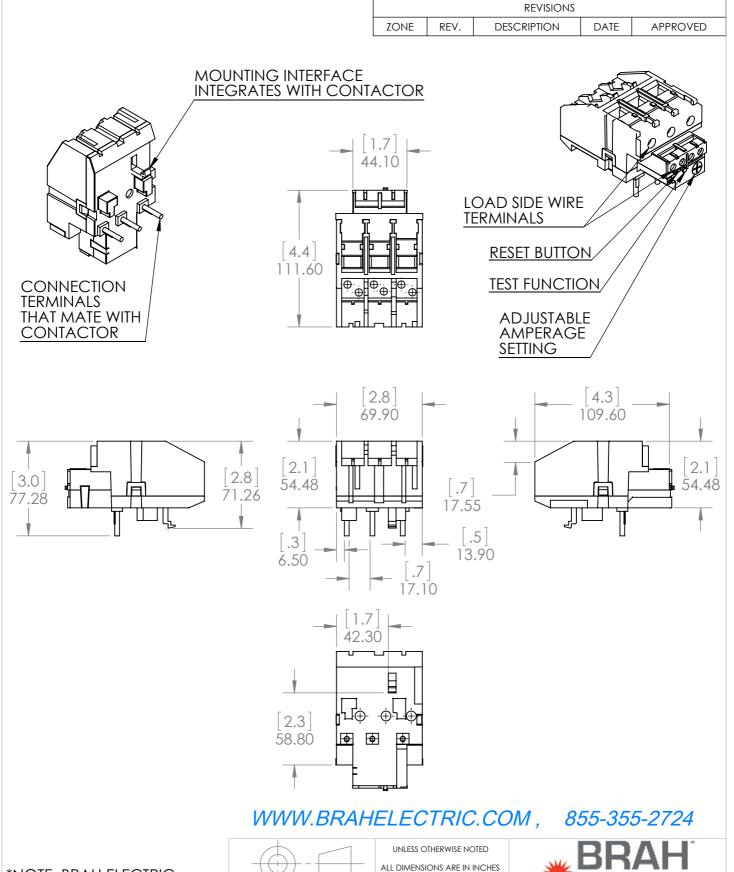

METRIC UNITS ARE DISPLAYED BENEATH IN [ MM. ]

MOLDED PLASTIC CASE

DO NOT SCALE DRAWING

N/A

SIZE DWG. NO

A

SCALE:1:3

**OVERLOAD RELAY** 

BLR2D3359

WEIGHT: 3.2 LBS

REV.

SHEET 1 OF 1

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS

WRITTEN PERMISSION OF BRAH ELECTRIC

DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE

\*NOTE: BRAH ELECTRIC OVERLOAD RELAY BLR2D3359 AN AFTERMARKET DIRECT REPLACMENT FOR LR2D3359.SUITABLE FOR USE WITH LC1D AND LC2D CONTACTORS