




CONTACT US @ 855-355-2724

E-Mail: [Sales@brahelectric.com](mailto:Sales@brahelectric.com)

[www.Brahelectric.com](http://www.Brahelectric.com)

## PRODUCT DATA SHEET

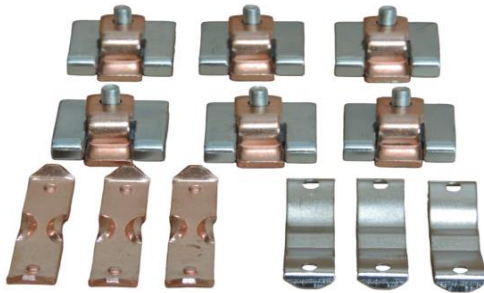

Contact Kits Picture is for reference only, Actual Kit may vary slightly

### Amperage selection chart:

#### BZLXXXX

BZL50	80 A
BZL63	90 A
BZL75	105 A
BZL95	125 A
BZL110	125 A
BZL145	230 A
BZL185	250 A
BZL210	300 A
BZL260	350 A
BZL300	400 A
BZL400	550 A
BZL460	650 A
BZL580	580 A
BZL750	750 A
BZL1250	1260 A
BZL1350	1350 A
BZL1650	1650 A
BZL2050	2050 A

### PART NUMBER-BZL185:





BRAH Electric, direct replacement, after market, contact kits for ABB 3 pole contact kit, rated for 250amp, 600 volt max, suitable with ABB A-Line model types A185, AE185, AF185, complete assembly kit includes all contacts and related mounting screws and hardware, direct substitute for Furnas OEM ZL185

### PRODUCT SPECIFICATIONS

Manufacturer	BRAH Electric
Sub-Category	Contact Kit
Family	A-Line
Type	ZL, BZL
Suitable For	A185, AE185, AF185
Amperage	250
Voltage	600
Poles	3

**Warranty:** All Products sold by BRAH Electric are guaranteed to be free of defect for a period of two years, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

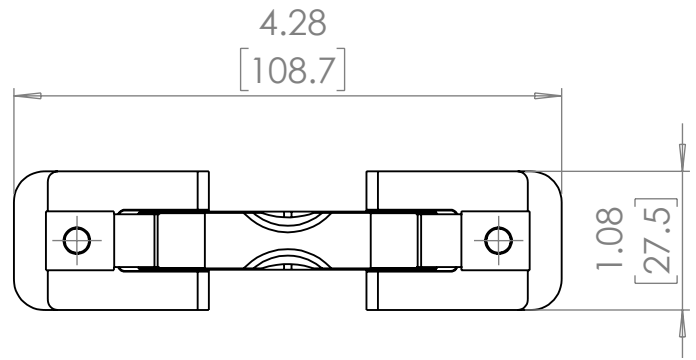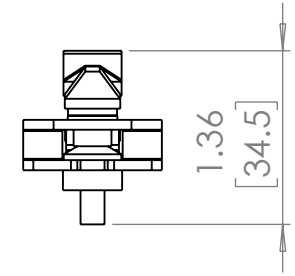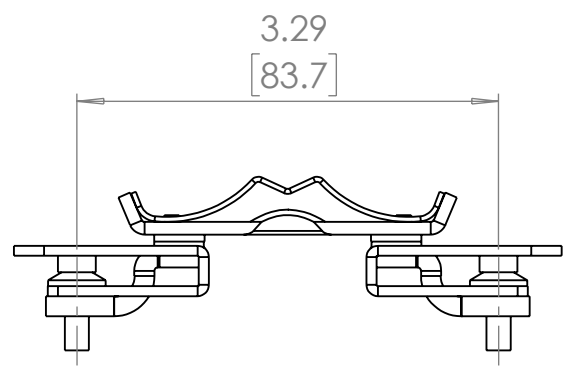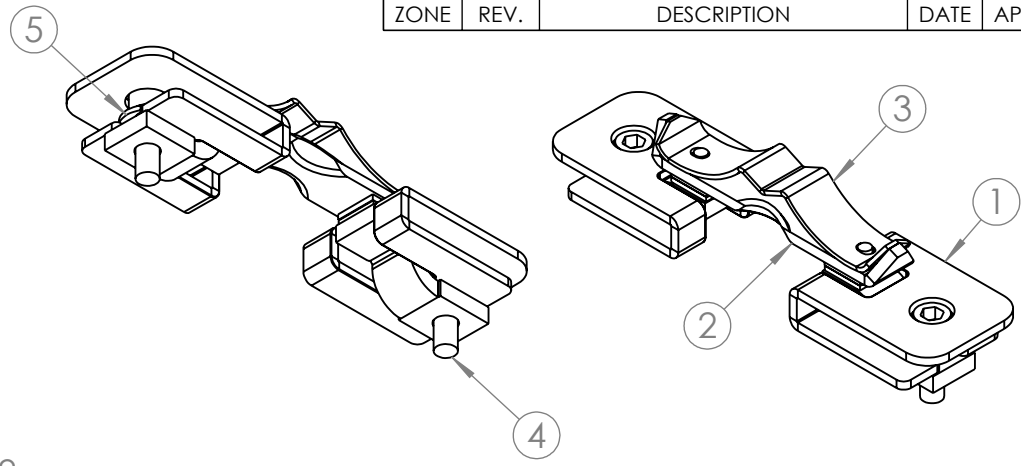

ITEM NO.	PART NUMBER	DESCRIPTION	VENDOR	QTY.
1	BZL185	Contact Kit	BRAH	6
2	BZL185 - 01	Contact Kit	BRAH	3
3	BZL185 - 02	Contact Kit	BRAH	3
4	BZL185 - Screw	M5 X 15mm	BRAH	6
5	BZL185 - Washer	Washer	BRAH	6

\* NOTE: BRAH Electric, aftermarket direct replacement contact kits for ABB ,Type BZL , 3 pole kit, suitable for use with ABB A-Line model types A185, AE185, AF185 magnetic contactors & motor starters, NEMA size 0, rated for 600V maximum of 250 Amp.

THIRD ANGLE PROJECTION

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

UNLESS OTHERWISE NOTED  
ALL DIMENSIONS ARE IN INCHES  
METRIC UNITS ARE DISPLAYED  
BENEATH IN [ MM. ]

MATERIAL	N/A
FINISH	N/A
DO NOT SCALE DRAWING	



**CONTACT KIT**

SIZE <b>A</b>	DWG. NO. <b>BZL185</b>	REV. <b>A</b>
SCALE: 1:2	WEIGHT: 0.231 LBS	SHEET 1 OF 1