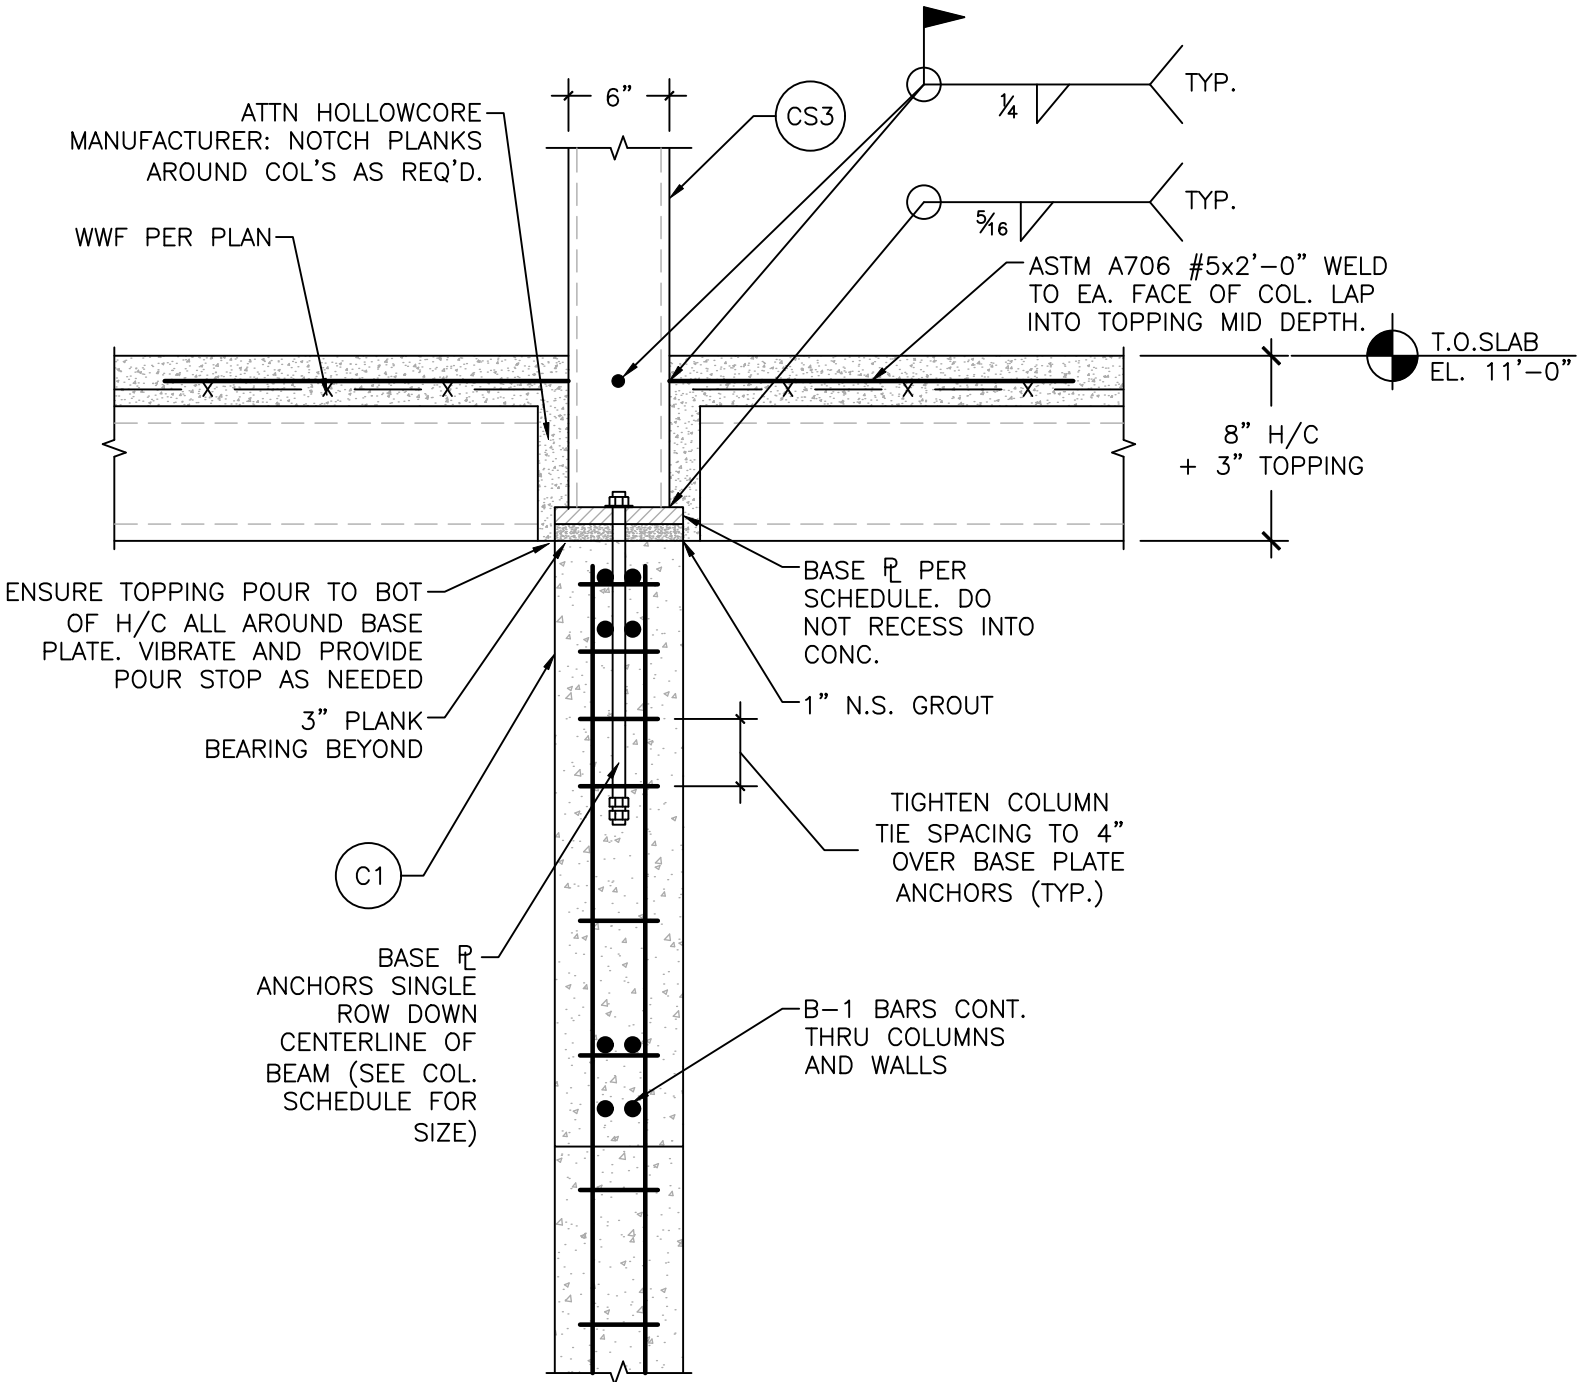
6"
CS3
ATTN HOLLOWCORE MANUFACTURER: NOTCH PLANKS AROUND COL'S AS REQ'D.
WWF PER PLAN
1/4
TYP.
5/16
TYP.
ASTM A706 #5x2'-0" WELD TO EA. FACE OF COL. LAP INTO TOPPING MID DEPTH.
T.O.SLAB EL. 11'-0"
8" H/C + 3" TOPPING
ENSURE TOPPING POUR TO BOT OF H/C ALL AROUND BASE PLATE. VIBRATE AND PROVIDE POUR STOP AS NEEDED
3" PLANK BEARING BEYOND
BASE PL PER SCHEDULE. DO NOT RECESS INTO CONC.
1" N.S. GROUT
TIGHTEN COLUMN TIE SPACING TO 4" OVER BASE PLATE ANCHORS (TYP.)
C1
BASE PL ANCHORS SINGLE ROW DOWN CENTERLINE OF BEAM (SEE COL. SCHEDULE FOR SIZE)
B-1 BARS CONT. THRU COLUMNS AND WALLS