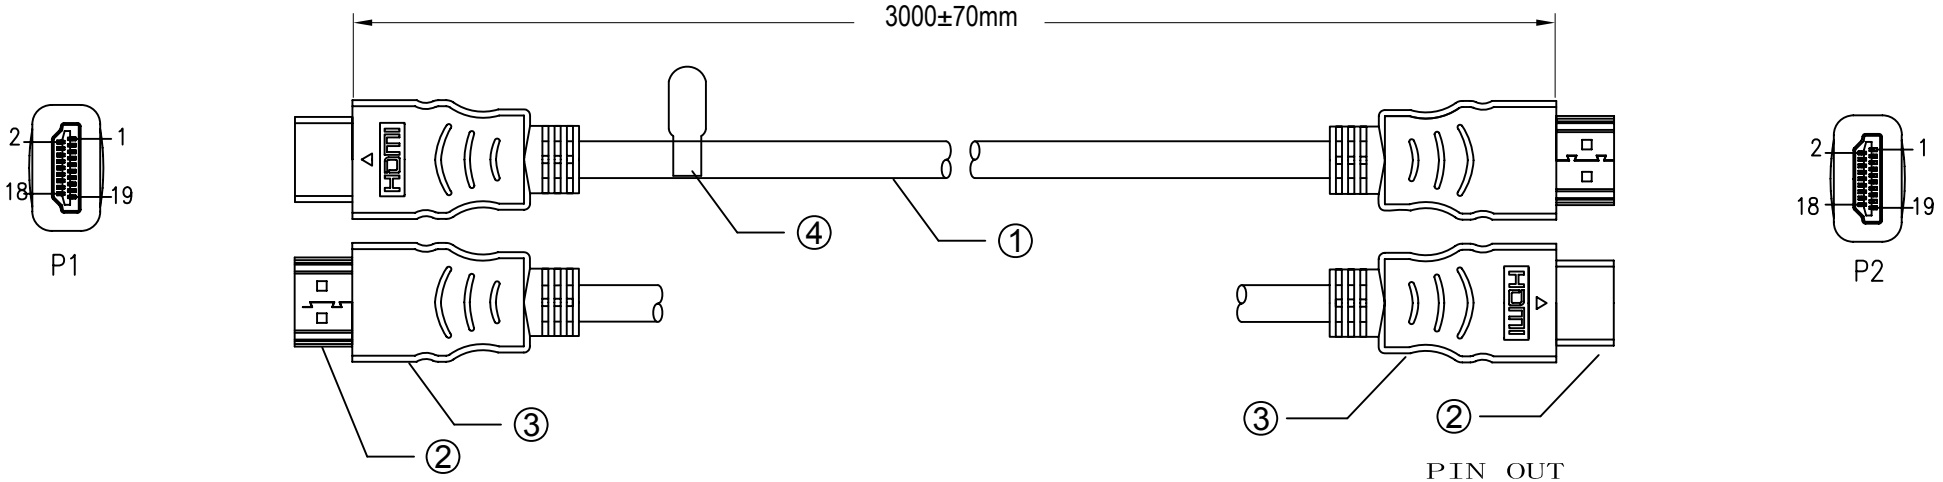

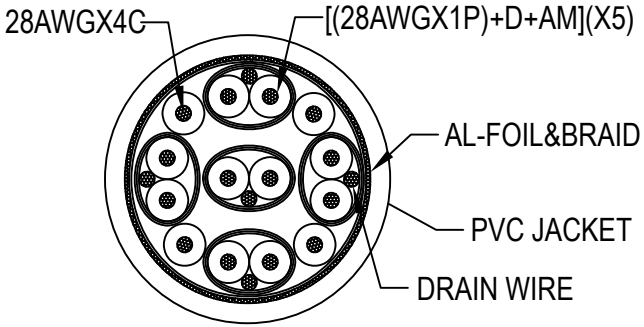

PIN OUT

P1	P2		
1	1	BLUE	RED AM
3	3	WHITE	
2	2	DRAIN	
4	4	BLUE	SILVER AM
6	6	WHITE	
5	5	DRAIN	
7	7	BLUE	BLUE AM
9	9	WHITE	
8	8	DRAIN	
10	10	BLUE	BROWN AM
12	12	WHITE	
11	11	DRAIN	
13	13	GREEN	
14	14	BLUE	GREEN AM
19	19	WHITE	
17	17	DRAIN	
15	15	WHITE	
16	16	BLUE	
18	18	RED	
SHELL	DRAIN	SHELL	

NOTE:
1.ELECTRICAL PROPERTIES:
1.1 100% OPEN AND SHORT TEST
1.2 CONDUCTOR RESISTANCE: 5 OHMS
1.3 INSULATION RESISTANCE: 10 MEGOHMS
1.4 HI--POT :DC300V/0.01S
1.5 100% TOTAL PHASE Ultra High Speed Test : HDMI2.1 /48Gbps
1.6 100% HDTV AND PC TEST (7680X4320 60HZ)
1.7 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE
2.ALL MATERIALS ARE ROHS COMPLIANT

NO.	PARTS NAME	Q'TY	SPECIFICATION
④	TAG	1PCS	DELTACO TAG
③	HOOD MOLDED	2PCS	BLACK PVC
②	CONNECTOR	2PCS	HDMI 2.1 Male,Gold plated
①	CABLE	1PCS	(28AWG+D+AM)*5P+28AWG*4C+AEB+BLACK PVC JACKET OD 6.0mm

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	HU-30
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

HDMI2.1 CABLE
HDMI 19PIN M/M 3m,

DELTACO