

NTRCLTPS-EIO

Room Temperature Sensor
with Setpoint Control and
BACnet® Communications



Description

The NTRCLTPS-EIO Network temperature sensor accurately measures room temperature, provides up/down setpoint control, a local override function and transmits this data via embedded BACnet® communications for the most efficient monitoring and control solution.


The device connects to an RS-485 MS/TP network to offer a single-point solution for control of indoor air quality and comfort. Features include a back-lit LCD and user menu for easy installation, field-proven sensors and user input controls to add local setpoint and override functions at the same network point.

Features

- ❖ Precision temperature sensor
- ❖ BACnet® communications
- ❖ Large LCD display with backlight
- ❖ Programmable Two button, Up/Down setpoint adjustment
- ❖ Momentary override switch with LCD indication
- ❖ Easy to field program
- ❖ Low profile, attractive enclosure
- ❖ Backplate can adapt to several electrical box styles or mount directly on the wall

Technical Specifications

Power Supply	20-28 VAC/VDC, non-isolated half-wave rectified
Power Consumption	35 mA max. @ 24 VDC
Communications Interface	Software: BACnet®, MS/TP protocol Hardware: 2-wire RS-485 Baud rate: Locally set from 300..76800 MAC address range: Locally set from 0..127 (Factory default is 3)
Temperature	Sensor: 10,000 Ω NTC Thermistor Accuracy: ±0.2°C, 0..+70°C (±0.4°F, +32..+158°F) Range: 0..+35°C (+32..+95°F)
Setpoint Range	Front panel Up/down buttons available via BACnet® Mode: Temperature (°C/°F), menu selectable Adjustable setpoint range: +10..+30°C or +50..+86°F, menu selectable Minimum span: 4°C/F Temperature Resolution: 0.5° or 1°, menu selectable
Override Switch	Front panel momentary pushbutton available via BACnet® Indication: Via BACnet® causes "OCC" segment to light on LCD
LCD Values	Temperature in °C/°F, menu selectable
LCD Resolution	0.5° or 1° C/F, menu selectable
LCD Size	1.5 in W x 0.65" in H (38.1 mm x 16.5 mm)
LCD Backlight	Auto-dimming, Enable/disable via jumper
Operating Temp	0..+50°C (+32..+122°F)
Storage Temp	-20..+65°C (-4..+149°F)
Operating Humidity	0..95% RH non-condensing
Enclosure	White ABS, IP30 (NEMA1)
Mounting	Electrical box or direct to wall
Terminals	Screw terminal block, 14 to 22 AWG
Dimensions	4.7 in x 3.3 in x 1.15 in (119 mm x 84 mm x 48.8 mm)

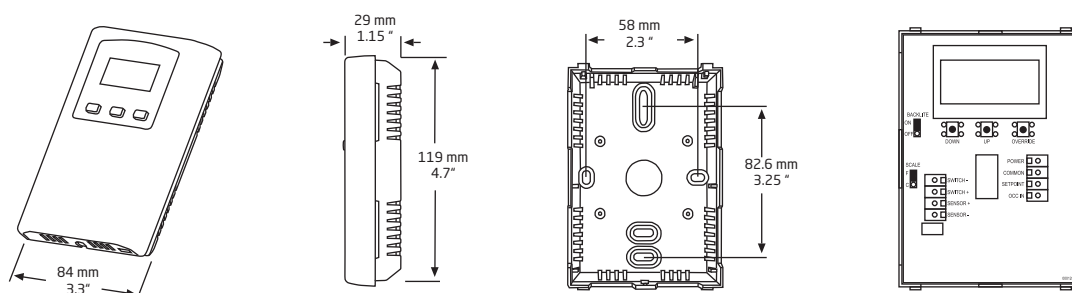

EasyIO Holdings Pte Ltd
www.EasyIO.com

RoHS
 COMPLIANT

Certified System
 ISO9001

CE

All specifications subject to change without notice or liability to provide changes to prior purchasers. Information and specifications published here are current as of the date of publication of this document. EasyIO Holdings, reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Singapore. Products or features contained herein may be covered by one or more U.S. or foreign patents. All brands and product names are trademarks or registered trademarks of their respective owners. Copyright © 2014 all rights reserved, EasyIO Holdings.