

Differential Pressure Switch

Adjustable differential pressure switch for monitoring overpressure, vacuum and differential pressure of air or other non-combustible, non-aggressive gases for both HVAC and Energy Management Applications. Automatic reset and field adjustable setpoints and switching differentials.



Type Overview

Type	Output Signal	Measuring Range Pressure
01APS-50R	switch	0.08 to 1.20 inch WC [20 to 300 Pa]
01APS-50U	switch	0.20 to 2.00 inch WC [50 to 500 Pa]
01APS-501	switch	0.80 to 4.00 inch WC [200 to 1000 Pa]
01APS-504	switch	2.00 to 10.00 inch WC [500 to 2500 Pa]


Technical Data

Electrical Data	Electrical Connection	terminals for wire 15 GA [0.5 to 1.5 mm ²]
	Cable Entry	cable gland M20 x 1.5 mm with strain relief Ø6 to 8 mm, 1/2" conduit adapter included
Functional Data	Output Signal Switch Note	contact current max. 1.0 A (0.4) / AC 250 V
	Media	air
Measuring Data	Measured Values	differential pressure
	Measuring Media	air, non-combustible and non-aggressive gases
	Accuracy Pressure	±15% (tolerance for upper and lower switching pressure)
	Overpressure Limit	40 inch WC (10kPa),
	Burst Pressure	40 inch WC (10kPa)
Materials	Housing	base: PA 6.6 cover: ps
	Safety Data	Storage Temperature
EU Conformity		CE Marking
Certification IEC/EN		IEC/EN 60730-1 and IEC/EN 60730-2-6
Degree of Protection IEC/EN		IP54
Degree of Protection NEMA/ UL		NEMA 3
Quality Standard		ISO 9001

Accessories

Scope of Delivery	pvc hose 6.5 ft (2 m) 2 x Duct connectors (plastic)
--------------------------	--

Wiring Diagram

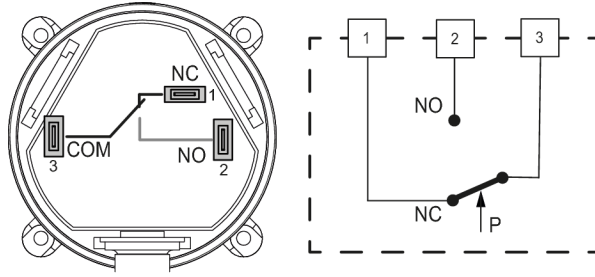

Dimensions

