


Ref: CASR 6-NP, CASR 15-NP, CASR 25-NP, CASR 50-NP

For the electronic measurement of current: DC, AC, pulsed..., with galvanic isolation between the primary (high power) and the secondary circuit (electronic circuit).



Features

- Closed loop (compensated) multi-range current transducer
- Voltage output
- Single supply
- Isolated plastic case material recognized according to UL 94-V0
- Compact design for PCB mounting.

Advantages

- Very low temperature coefficient of offset
- Very good dv/dt immunity
- LTSR compatible
- Reduced height
- Reference pin with two modes: Ref IN and Ref OUT
- Extended measuring range for unipolar measurement.

Applications

- AC variable speed and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- Solar inverter.

Standards

- EN 50178
- UL 508
- IEC 61010-1-safety.

Application Domain

- Industrial.

Absolute maximum ratings

| Parameter | Symbol | Unit | Value |
|------------------------------------|--------|------|-------|
| Supply voltage | V_C | V | 7 |
| Primary conductor temperature | | °C | 110 |
| ESD rating, Human Body Model (HBM) | | kV | 4 |

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Isolation characteristics

| Parameter | Symbol | Unit | Value | Comment |
|--|-------------|------|-----------------------|---|
| RMS voltage for AC isolation test 50/60Hz/1 min | V_d | kV | 4.1 | |
| Impulse withstand voltage 1.2/50 μ s | \hat{V}_w | kV | 7.5 | |
| Partial discharge extinction voltage @ 10 pC (rms) | V_e | V | 1000 | |
| Clearance distance (pri. - sec.) | dCl | mm | 7.5 | Shortest distance through air |
| Creepage distance (pri. - sec.) | dCp | mm | 7.5 | Shortest path along device body |
| Creepage distance (pri. - sec.) | dCp | mm | 6.2 | When mounted on PCB with recommended layout |
| Case material | - | - | V0 according to UL 94 | |
| Comparative tracking index | CTI | V | 600 | |
| Application example | - | - | 300 V CAT III PD2 | Reinforced isolation, non uniform field according to EN 50178, EN 61010 |
| Application example | - | - | 600 V CAT III PD2 | Simple isolation, non uniform field according to EN 50178, EN 61010 |
| According to UL 508: primary potential involved in Volts RMS AC or DC | - | V | 600 | For use in a pollution degree 2 environment |

Environmental and mechanical characteristics

| Parameter | Symbol | Unit | Min | Typ | Max | Comment |
|-------------------------------|---|------|-----|-----|-----|---------|
| Ambient operating temperature | T_A | °C | -40 | | 85 | |
| Ambient storage temperature | T_S | °C | -55 | | 105 | |
| Mass | m | g | | 9 | | |
| Standards | EN 50178, IEC 60950-1, IEC 61010-1, IEC 61326-1, UL 508 | | | | | |

Electrical data CASR 6-NP

 At $T_A = 25^\circ\text{C}$, $V_C = +5\text{ V}$, $N_P = 1$ turn, $R_L = 10\text{ k}\Omega$, internal reference, unless otherwise noted.

| Parameter | Symbol | Unit | Min | Typ | Max | Comment |
|---|--------------|-------------------------------|-------|-------------------------------------|-------------------------------------|---|
| Primary nominal current rms | I_{PN} | A | | 6 | | |
| Primary current, measuring range | I_{PM} | A | -20 | | 20 | |
| Number of primary turns | N_P | - | | 1,2,3 | | |
| Supply voltage | V_C | V | 4.75 | 5 | 5.25 | |
| Current consumption | I_C | mA | | $15 + \frac{I_P \text{ (mA)}}{N_S}$ | $20 + \frac{I_P \text{ (mA)}}{N_S}$ | $N_S = 1731$ turns |
| Reference voltage @ $I_P = 0\text{ A}$ | V_{REF} | V | 2.495 | 2.5 | 2.505 | Internal reference |
| External reference voltage | V_{REF} | V | 0 | | 4 | |
| Output voltage | V_{OUT} | V | 0.375 | | 4.625 | |
| Output voltage @ $I_P = 0\text{ A}$ | V_{OUT} | V | | V_{REF} | | |
| Electrical offset voltage | V_{OE} | mV | -5.3 | | 5.3 | 100% tested $V_{OUT} - V_{REF}$ |
| Electrical offset current referred to primary | I_{OE} | mA | -51 | | 51 | 100% tested |
| Temperature coefficient of V_{REF} | TCV_{REF} | ppm/K | | ± 5 | ± 50 | Internal reference |
| Temperature coefficient of V_{OUT} @ $I_P = 0\text{ A}$ | TCV_{OUT} | ppm/K | | ± 6 | ± 30 | ppm/K of 2.5 V - 40°C .. 85°C |
| Theoretical sensitivity | G_{th} | mV/A | | 104.2 | | 625 mV / I_{PN} |
| Sensitivity error | ϵ_G | % | -0.7 | | 0.7 | 100% tested |
| Temperature coefficient of G | TCG | ppm/K | | | ± 40 | - 40°C .. 85°C |
| Linearity error | ϵ_L | % of I_{PN} | -0.1 | | 0.1 | |
| Magnetic offset current (10 x I_{PN}) referred to primary | I_{OM} | A | -0.1 | | 0.1 | |
| Output current noise (spectral density) rms 100 Hz .. 100 kHz referred to primary | i_{no} | $\mu\text{A}/\text{Hz}^{1/2}$ | | 20 | | $R_L = 1\text{ k}\Omega$ |
| Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.) | - | mV | | 40 | 160 | $R_L = 1\text{ k}\Omega$ |
| Reaction time @ 10 % of I_{PN} | t_{ra} | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$ |
| Response time @ 90 % of I_{PN} | t_r | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$ |
| Frequency bandwidth ($\pm 1\text{ dB}$) | BW | kHz | 200 | | | $R_L = 1\text{ k}\Omega$ |
| Frequency bandwidth ($\pm 3\text{ dB}$) | BW | kHz | 300 | | | $R_L = 1\text{ k}\Omega$ |
| Overall accuracy | X_G | % of I_{PN} | | | 1.7 | |
| Overall accuracy @ $T_A = 85^\circ\text{C}$ | X_G | % of I_{PN} | | | 2.6 | |
| Accuracy | X | % of I_{PN} | | | 0.8 | |
| Accuracy @ $T_A = 85^\circ\text{C}$ | X | % of I_{PN} | | | 1.8 | |

Electrical data CASR 15-NP

 At $T_A = 25^\circ\text{C}$, $V_C = +5\text{ V}$, $N_P = 1$ turn, $R_L = 10\text{ k}\Omega$, internal reference, unless otherwise noted.

| Parameter | Symbol | Unit | Min | Typ | Max | Comment |
|---|--------------|-------------------------------|-------|-------------------------------------|-------------------------------------|---|
| Primary nominal current rms | I_{PN} | A | | 15 | | |
| Primary current, measuring range | I_{PM} | A | -51 | | 51 | |
| Number of primary turns | N_P | - | | 1,2,3 | | |
| Supply voltage | V_C | V | 4.75 | 5 | 5.25 | |
| Current consumption | I_C | mA | | $15 + \frac{I_P \text{ (mA)}}{N_S}$ | $20 + \frac{I_P \text{ (mA)}}{N_S}$ | $N_S = 1731$ turns |
| Reference voltage @ $I_P = 0\text{ A}$ | V_{REF} | V | 2.495 | 2.5 | 2.505 | Internal reference |
| External reference voltage | V_{REF} | V | 0 | | 4 | |
| Output voltage | V_{OUT} | V | 0.375 | | 4.625 | |
| Output voltage @ $I_P = 0\text{ A}$ | V_{OUT} | V | | V_{REF} | | |
| Electrical offset voltage | V_{OE} | mV | -2.21 | | 2.21 | 100% tested $V_{OUT} - V_{REF}$ |
| Electrical offset current referred to primary | I_{OE} | mA | -53 | | 53 | 100% tested |
| Temperature coefficient of V_{REF} | TCV_{REF} | ppm/K | | ± 5 | ± 50 | Internal reference |
| Temperature coefficient of V_{OUT} @ $I_P = 0\text{ A}$ | TCV_{OUT} | ppm/K | | ± 2.3 | ± 20 | ppm/K of 2.5 V - $40^\circ\text{C} \dots 85^\circ\text{C}$ |
| Theoretical sensitivity | G_{th} | mV/A | | 41.67 | | $625\text{ mV} / I_{PN}$ |
| Sensitivity error | ϵ_G | % | -0.7 | | 0.7 | 100% tested |
| Temperature coefficient of G | TCG | ppm/K | | | ± 40 | - $40^\circ\text{C} \dots 85^\circ\text{C}$ |
| Linearity error | ϵ_L | % of I_{PN} | -0.1 | | 0.1 | |
| Magnetic offset current ($10 \times I_{PN}$) referred to primary | I_{OM} | A | -0.1 | | 0.1 | |
| Output current noise (spectral density) rms 100 Hz .. 100 kHz referred to primary | i_{no} | $\mu\text{A}/\text{Hz}^{1/2}$ | | 20 | | $R_L = 1\text{ k}\Omega$ |
| Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.) | - | mV | | 15 | 60 | $R_L = 1\text{ k}\Omega$ |
| Reaction time @ 10 % of I_{PN} | t_{ra} | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 44\text{ A}/\mu\text{s}$ |
| Response time @ 90 % of I_{PN} | t_r | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 44\text{ A}/\mu\text{s}$ |
| Frequency bandwidth ($\pm 1\text{ dB}$) | BW | kHz | 200 | | | $R_L = 1\text{ k}\Omega$ |
| Frequency bandwidth ($\pm 3\text{ dB}$) | BW | kHz | 300 | | | $R_L = 1\text{ k}\Omega$ |
| Overall accuracy | X_G | % of I_{PN} | | | 1.2 | |
| Overall accuracy @ $T_A = 85^\circ\text{C}$ | X_G | % of I_{PN} | | | 1.9 | |
| Accuracy | X | % of I_{PN} | | | 0.8 | |
| Accuracy @ $T_A = 85^\circ\text{C}$ | X | % of I_{PN} | | | 1.5 | |

Electrical data CASR 25-NP

 At $T_A = 25^\circ\text{C}$, $V_C = +5\text{ V}$, $N_P = 1$ turn, $R_L = 10\text{ k}\Omega$, internal reference, unless otherwise noted.

| Parameter | Symbol | Unit | Min | Typ | Max | Comment |
|---|--------------|-------------------------------|-------|-------------------------------------|-------------------------------------|---|
| Primary nominal current rms | I_{PN} | A | | 25 | | |
| Primary current, measuring range | I_{PM} | A | -85 | | 85 | |
| Number of primary turns | N_P | - | | 1,2,3 | | |
| Supply voltage | V_C | V | 4.75 | 5 | 5.25 | |
| Current consumption | I_C | mA | | $15 + \frac{I_P \text{ (mA)}}{N_S}$ | $20 + \frac{I_P \text{ (mA)}}{N_S}$ | $N_S = 1731$ turns |
| Reference voltage @ $I_P = 0\text{ A}$ | V_{REF} | V | 2.495 | 2.5 | 2.505 | Internal reference |
| External reference voltage | V_{REF} | V | 0 | | 4 | |
| Output voltage | V_{OUT} | V | 0.375 | | 4.625 | |
| Output voltage @ $I_P = 0\text{ A}$ | V_{OUT} | V | | V_{REF} | | |
| Electrical offset voltage | V_{OE} | mV | -1.35 | | 1.35 | 100% tested $V_{OUT} - V_{REF}$ |
| Electrical offset current referred to primary | I_{OE} | mA | -54 | | 54 | 100% tested |
| Temperature coefficient of V_{REF} | TCV_{REF} | ppm/K | | ± 5 | ± 50 | Internal reference |
| Temperature coefficient of V_{OUT} @ $I_P = 0\text{ A}$ | TCV_{OUT} | ppm/K | | ± 1.4 | ± 10 | ppm/K of 2.5 V - 40°C .. 85°C |
| Theoretical sensitivity | G_{th} | mV/A | | 25 | | 625 mV/ I_{PN} |
| Sensitivity error | ϵ_G | % | -0.7 | | 0.7 | 100% tested |
| Temperature coefficient of G | TCG | ppm/K | | | ± 40 | - 40°C .. 85°C |
| Linearity error | ϵ_L | % of I_{PN} | -0.1 | | 0.1 | |
| Magnetic offset current ($10 \times I_{PN}$) referred to primary | I_{OM} | A | -0.1 | | 0.1 | |
| Output current noise (spectral density) rms 100 Hz .. 100 kHz referred to primary | i_{no} | $\mu\text{A}/\text{Hz}^{1/2}$ | | 20 | | $R_L = 1\text{ k}\Omega$ |
| Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.) | - | mV | | 10 | 40 | $R_L = 1\text{ k}\Omega$ |
| Reaction time @ 10 % of I_{PN} | t_{ra} | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 68\text{ A}/\mu\text{s}$ |
| Response time @ 90 % of I_{PN} | t_r | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 68\text{ A}/\mu\text{s}$ |
| Frequency bandwidth ($\pm 1\text{ dB}$) | BW | kHz | 200 | | | $R_L = 1\text{ k}\Omega$ |
| Frequency bandwidth ($\pm 3\text{ dB}$) | BW | kHz | 300 | | | $R_L = 1\text{ k}\Omega$ |
| Overall accuracy | X_G | % of I_{PN} | | | 1 | |
| Overall accuracy @ $T_A = 85^\circ\text{C}$ | X_G | % of I_{PN} | | | 1.5 | |
| Accuracy | X | % of I_{PN} | | | 0.8 | |
| Accuracy @ $T_A = 85^\circ\text{C}$ | X | % of I_{PN} | | | 1.3 | |

Electrical data CASR 50-NP

 At $T_A = 25^\circ\text{C}$, $V_C = +5\text{ V}$, $N_P = 1$ turn, $R_L = 10\text{ k}\Omega$, internal reference, unless otherwise noted.

| Parameter | Symbol | Unit | Min | Typ | Max | Comment |
|---|--------------|-------------------------------|--------|-------------------------------------|-------------------------------------|--|
| Primary nominal current rms | I_{PN} | A | | 50 | | |
| Primary current, measuring range | I_{PM} | A | -150 | | 150 | |
| Number of primary turns | N_P | - | | 1,2,3 | | |
| Supply voltage | V_C | V | 4.75 | 5 | 5.25 | |
| Current consumption | I_C | mA | | $15 + \frac{I_P \text{ (mA)}}{N_S}$ | $20 + \frac{I_P \text{ (mA)}}{N_S}$ | $N_S = 966$ turns |
| Reference voltage @ $I_p = 0\text{ A}$ | V_{REF} | V | 2.495 | 2.5 | 2.505 | Internal reference |
| External reference voltage | V_{REF} | V | 0 | | 4 | |
| Output voltage | V_{OUT} | V | 0.375 | | 4.625 | |
| Output voltage @ $I_p = 0\text{ A}$ | V_{OUT} | V | | V_{REF} | | |
| Electrical offset voltage | V_{OE} | mV | -0.725 | | 0.725 | 100% tested $V_{OUT} - V_{REF}$ |
| Electrical offset current referred to primary | I_{OE} | mA | -58 | | 58 | 100% tested |
| Temperature coefficient of V_{REF} | TCV_{REF} | ppm/K | | ± 5 | ± 50 | Internal reference |
| Temperature coefficient of V_{OUT} @ $I_p = 0\text{ A}$ | TCV_{OUT} | ppm/K | | ± 0.7 | ± 7 | ppm/K of 2.5 V - $40^\circ\text{C} \dots 85^\circ\text{C}$ |
| Theoretical sensitivity | G_{th} | mV/A | | 12.5 | | $625\text{ mV} / I_{PN}$ |
| Sensitivity error | ϵ_G | % | -0.7 | | 0.7 | 100% tested |
| Temperature coefficient of G | TCG | ppm/K | | | ± 40 | - $40^\circ\text{C} \dots 85^\circ\text{C}$ |
| Linearity error | ϵ_L | % of I_{PN} | -0.1 | | 0.1 | |
| Magnetic offset current ($10 \times I_{PN}$) referred to primary | I_{OM} | A | -0.1 | | 0.1 | |
| Output current noise (spectral density) rms 100 Hz .. 100 kHz referred to primary | i_{no} | $\mu\text{A}/\text{Hz}^{1/2}$ | | 20 | | $R_L = 1\text{ k}\Omega$ |
| Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (Typ.) | - | mV | | 5 | 20 | $R_L = 1\text{ k}\Omega$ |
| Reaction time @ 10 % of I_{PN} | t_{ra} | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 100\text{ A}/\mu\text{s}$ |
| Response time @ 90 % of I_{PN} | t_r | μs | | | 0.3 | $R_L = 1\text{ k}\Omega$ $di/dt = 100\text{ A}/\mu\text{s}$ |
| Frequency bandwidth ($\pm 1\text{ dB}$) | BW | kHz | 200 | | | $R_L = 1\text{ k}\Omega$ |
| Frequency bandwidth ($\pm 3\text{ dB}$) | BW | kHz | 300 | | | $R_L = 1\text{ k}\Omega$ |
| Overall accuracy | X_G | % of I_{PN} | | | 0.9 | |
| Overall accuracy @ $T_A = 85^\circ\text{C}$ | X_G | % of I_{PN} | | | 1.3 | |
| Accuracy | X | % of I_{PN} | | | 0.8 | |
| Accuracy @ $T_A = 85^\circ\text{C}$ | X | % of I_{PN} | | | 1.2 | |

Typical performance characteristics CASR 6-NP

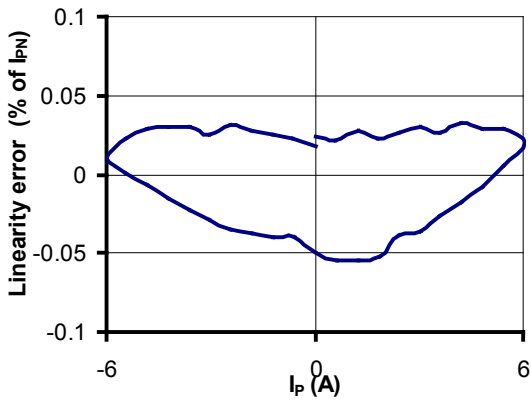


Figure 1: Linearity error

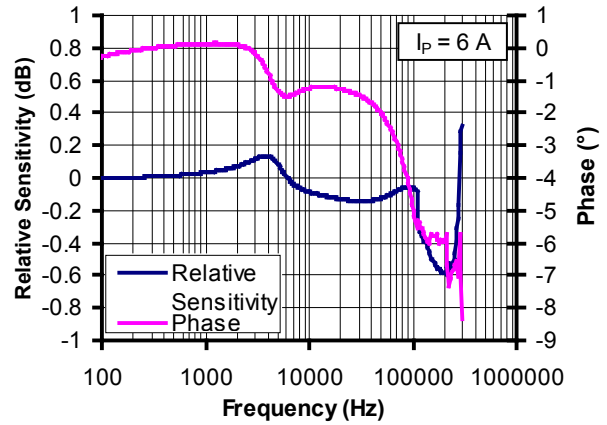


Figure 2: Frequency response

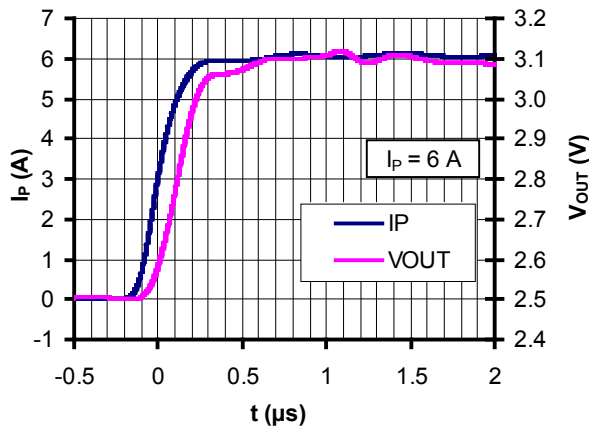


Figure 3: Step response

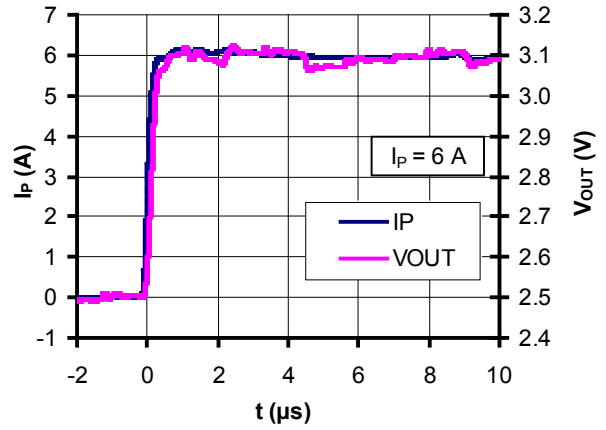


Figure 4: Step response

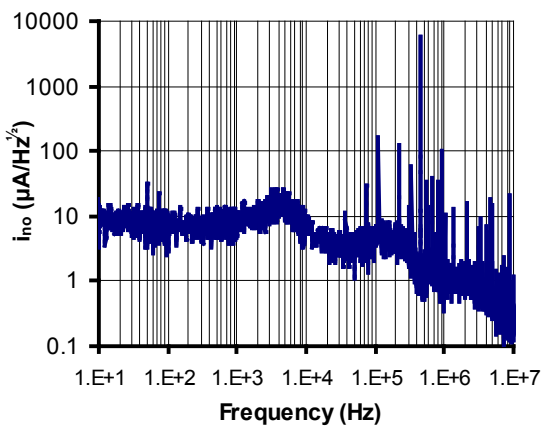


Figure 5: Input referred noise

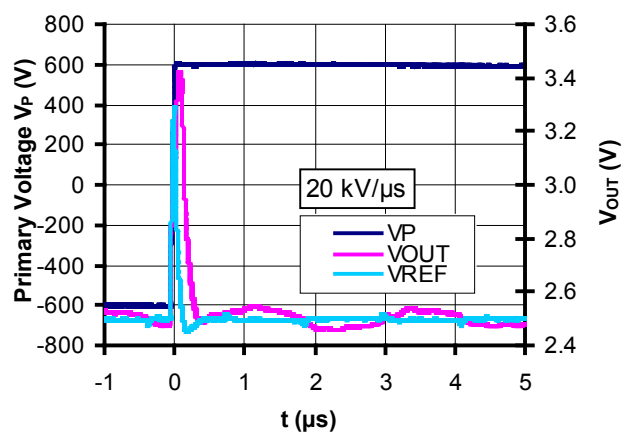


Figure 6: dv/dt

Typical performance characteristics CASR 15-NP

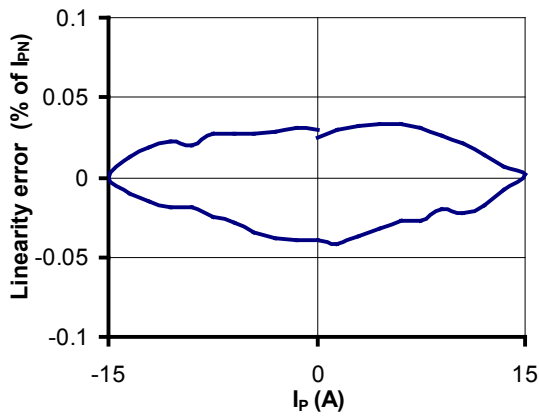


Figure 7: Linearity error

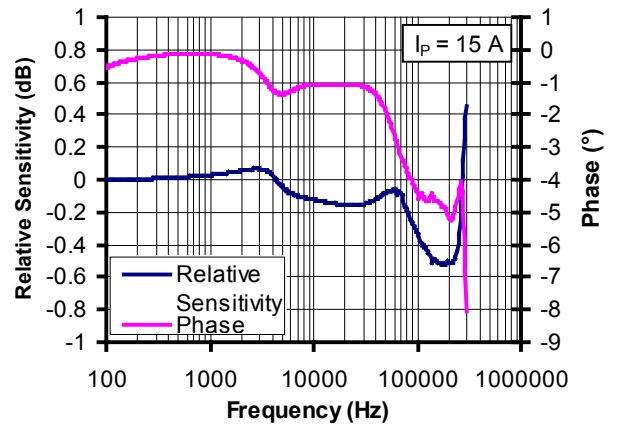


Figure 8: Frequency response

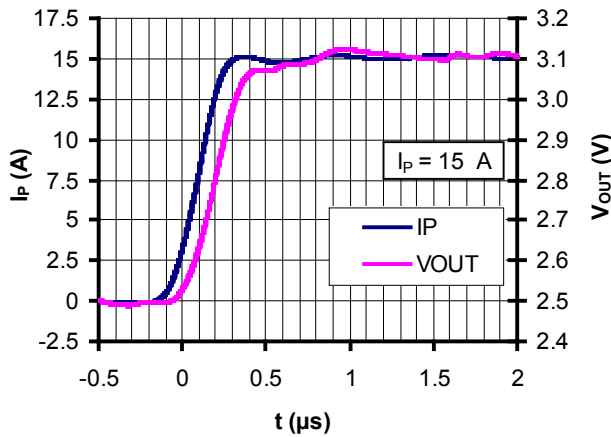


Figure 9: Step response

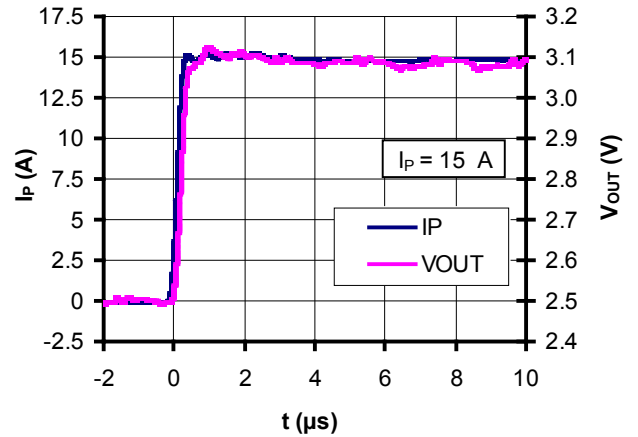


Figure 10: Step response

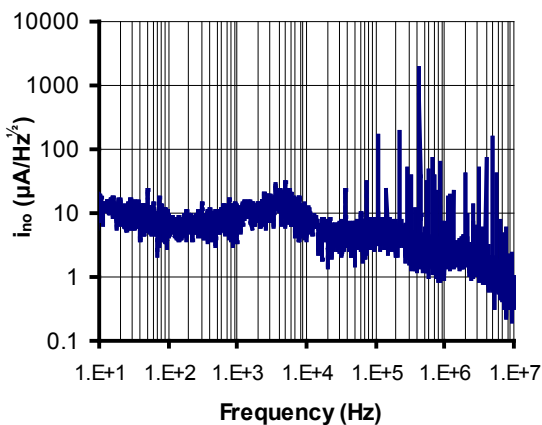


Figure 11: Input referred noise

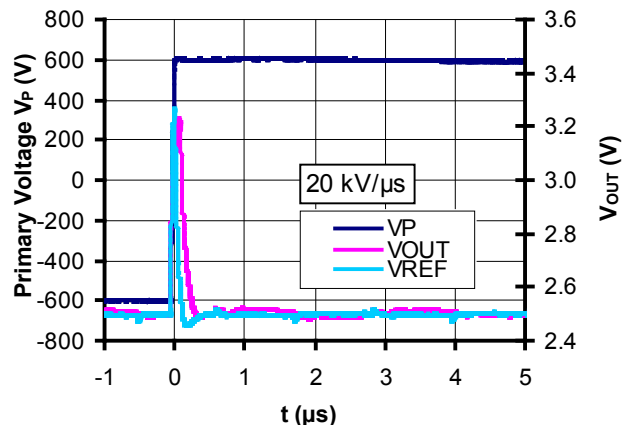


Figure 12: dv/dt

Typical performance characteristics CASR 25-NP

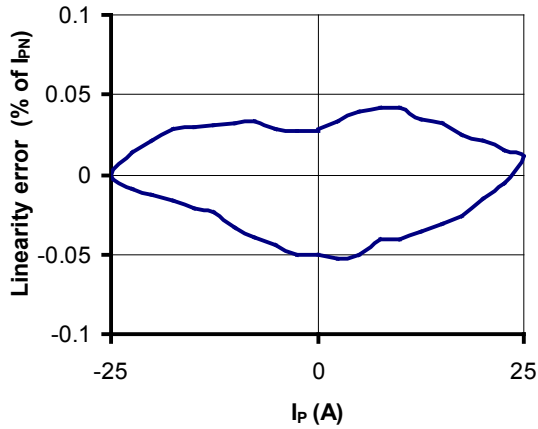


Figure 13: Linearity error

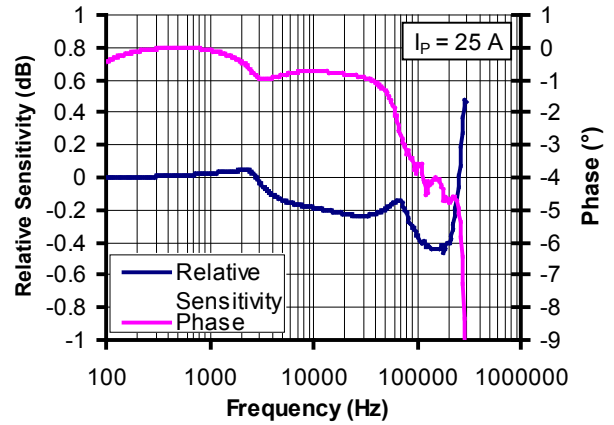


Figure 14: Frequency response

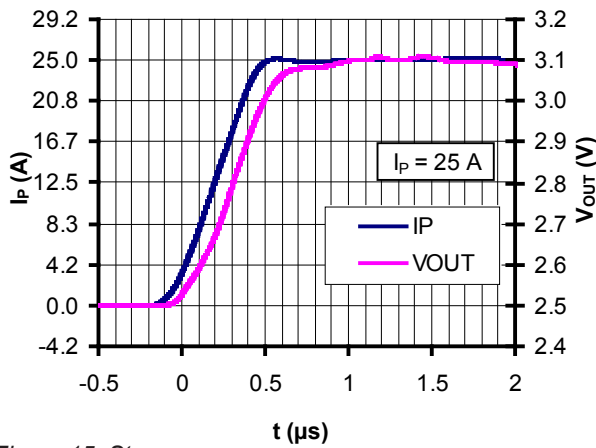


Figure 15: Step response

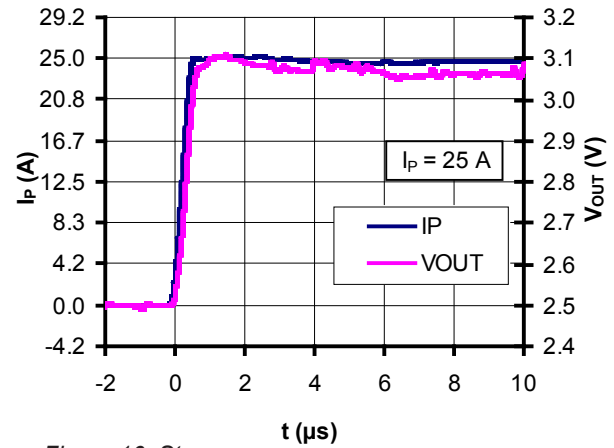


Figure 16: Step response

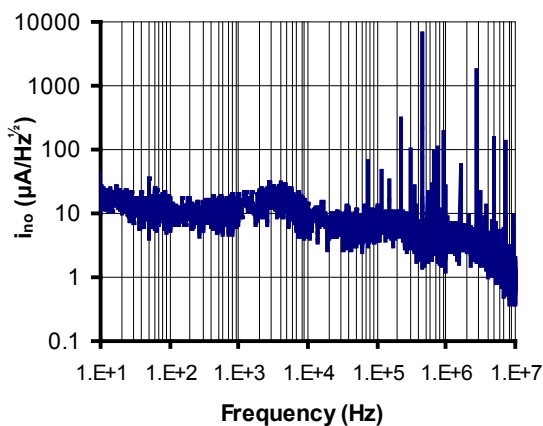


Figure 17: Input referred noise

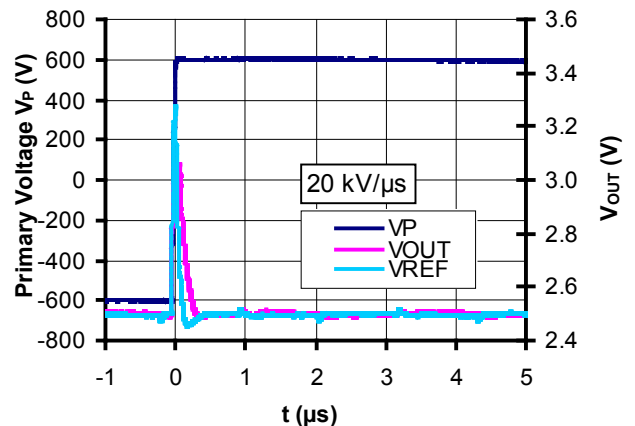


Figure 18: dv/dt

Typical performance characteristics CASR 50-NP

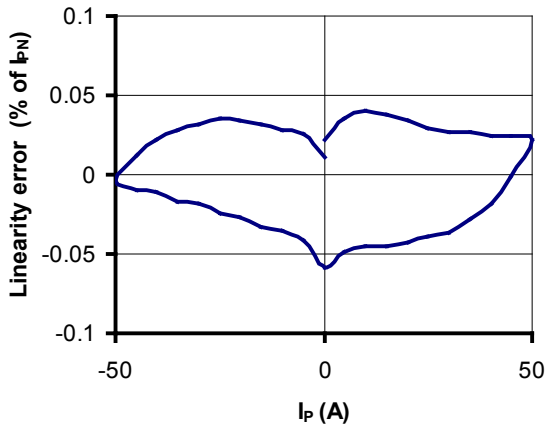


Figure 19: Linearity error

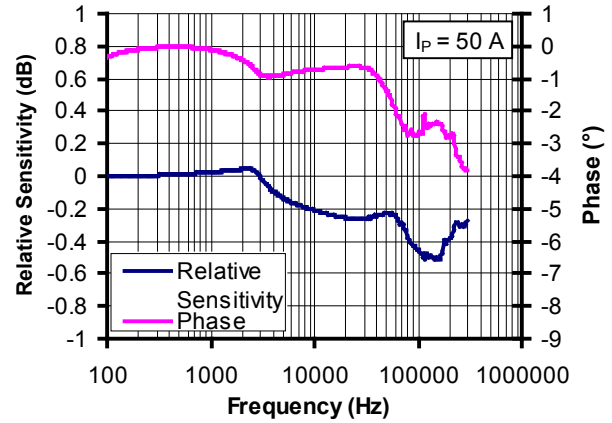


Figure 20: Frequency response

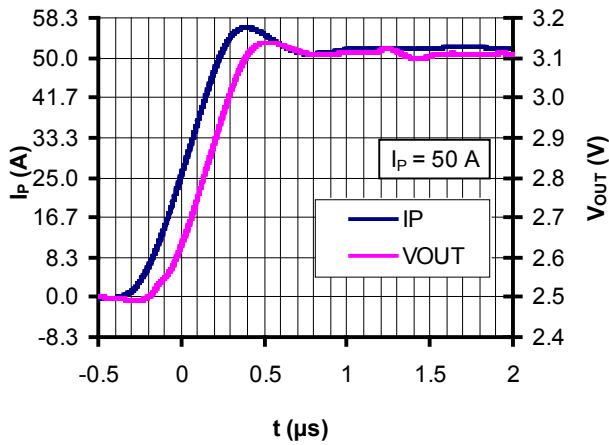


Figure 21: Step response

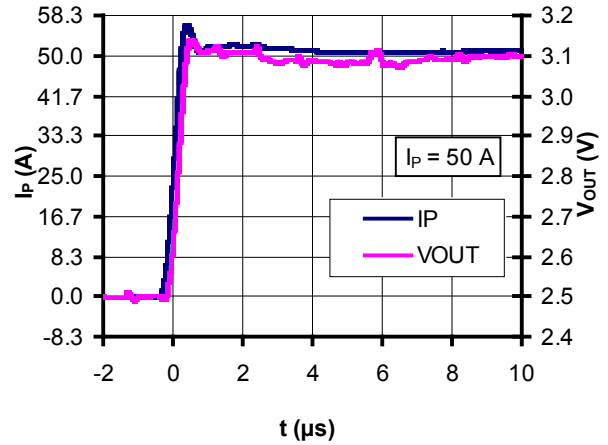


Figure 22: Step response

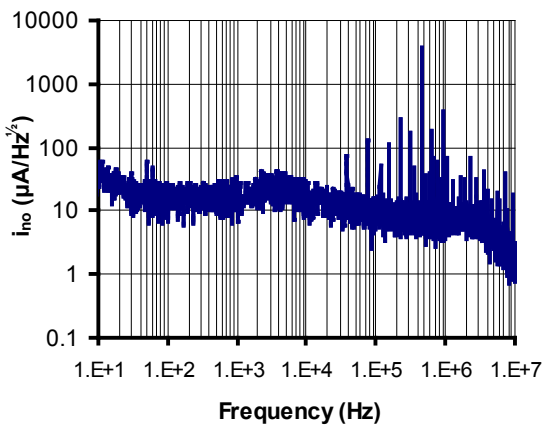


Figure 23: Input referred noise

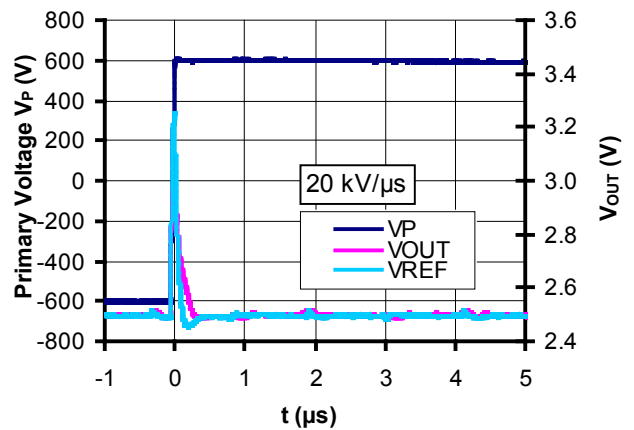


Figure 24: dv/dt

Maximum continuous DC primary current

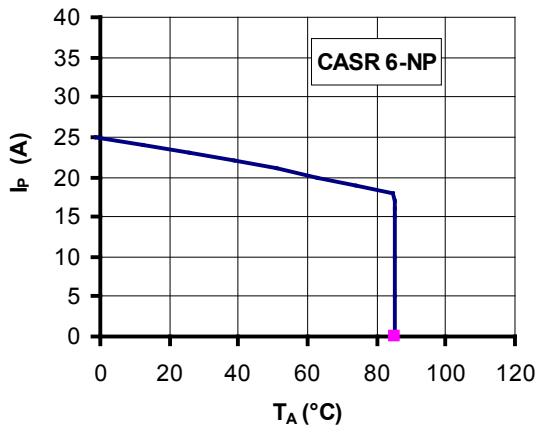


Figure 25: I_p vs T_A for CASR 6-NP

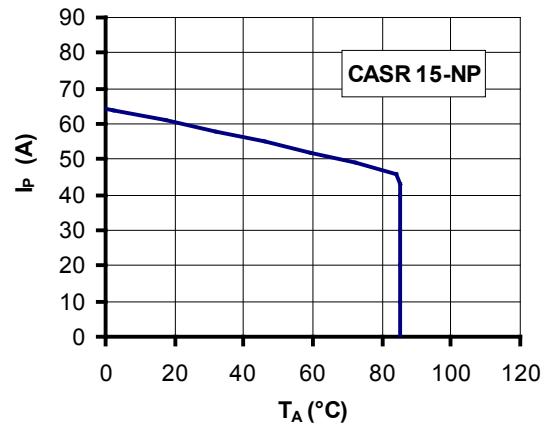


Figure 26: I_p vs T_A for CASR 15-NP

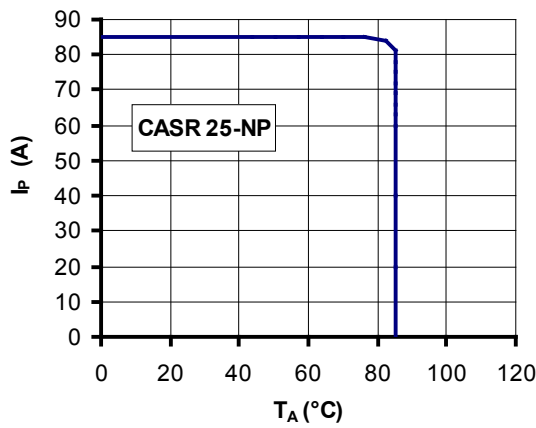


Figure 27: I_p vs T_A for CASR 25-NP

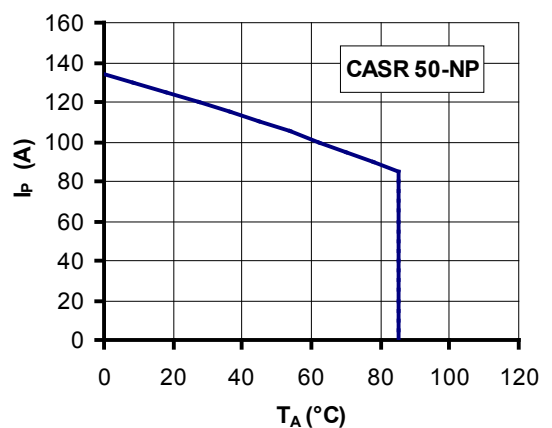


Figure 28: I_p vs T_A for CASR 50-NP

The maximum continuous DC primary current plot shows the boundary of the area for which all the following conditions are true:

- $I_p < I_{PM}$
- Junction temperature $T_j < 125\text{ °C}$
- Primary conductor temperature $< 110\text{ °C}$
- Resistor power dissipation $< 0.5 \times$ rated power

Frequency derating

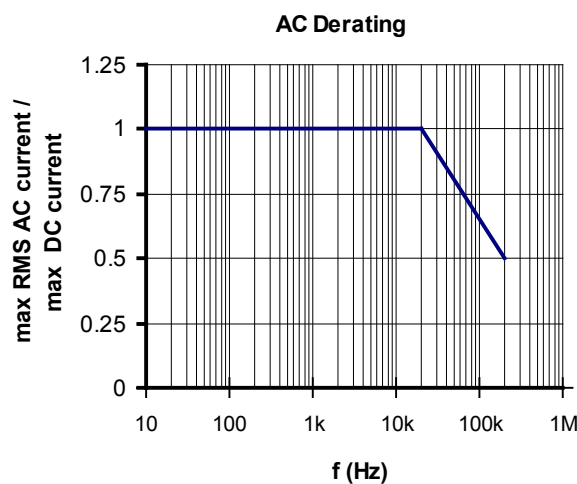


Figure 29: Maximum RMS AC primary current / maximum DC primary current vs frequency

Performance parameters definition

Ampere-turns and amperes

The transducer is sensitive to the primary current linkage Θ_p (also called ampere-turns).

$$\Theta_p = N_p I_p \text{ (At)}$$

With N_p the number of primary turn (1, 2 or 3 depending on the connection of the primary jumpers)

Warning: As most transducer user will use it with only one single primary turn ($N_p = 1$), most of this datasheet is written with primary currents instead of current linkages. The unit is kept as ampere-turn (At) to make clear that ampere-turns are meant.

Transducer simplified model

The static model of the transducer at temperature T_A is:

$$V_{OUT} = G \Theta_p + \text{error}$$

In which error =

$$V_{OE} + V_{OT}(T_A) + \varepsilon_G \cdot \Theta_p \cdot G + \varepsilon_L(\Theta_{Pmax}) \cdot \Theta_{Pmax} \cdot G + TCG \cdot (T_A - 25) \cdot \Theta_p \cdot G$$

- With:
- $\Theta_p = N_p I_p$:the input ampere-turns (At)
Please read above warning.
 - Θ_{pmax} :the maxi input ampere-turns that have been applied to the transducer (At)
 - V_{OUT} :the secondary voltage (V)
 - T_A :the ambient temperature ($^{\circ}\text{C}$)
 - V_{OE} :the electrical offset voltage (V)
 - $V_{OT}(T_A)$:the temperature variation of V_O at temperature T_A (V)
 - G** :the sensitivity of the transducer (V/At)
 - ε_G :the sensitivity error
 - $\varepsilon_L(\Theta_{Pmax})$:the linearity error for Θ_{Pmax}

This model is valid for primary ampere-turns Θ_p between $-\Theta_{Pmax}$ and $+\Theta_{Pmax}$ only.

Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to I_p , then to $-I_p$ and back to 0 (equally spaced $I_p/10$ steps).

The sensitivity G is defined as the slope of the linear regression line for a cycle between $\pm I_{PN}$.

The linearity error ε_L is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of I_{PN} .

Magnetic offset

The magnetic offset current I_{OM} is the consequence of a current on the primary side ("memory effect" of the transducer's ferro-magnetic parts). It is included in the linearity figure but can be measured individually.

It is measured using the following primary current cycle.

I_{OM} depends on the current value I_{p1} .

$$I_{OM} = \frac{V_{OUT}(t_1) - V_{OUT}(t_2)}{2} \cdot \frac{1}{Gth}$$

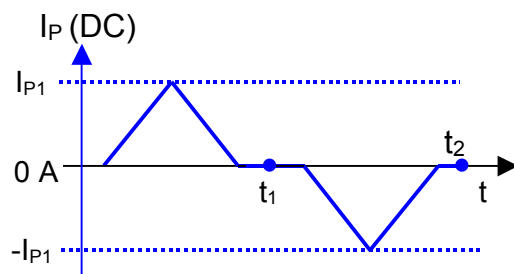


Figure 30: Current cycle used to measure magnetic and electrical offset (transducer supplied)

Performance parameters definition (continued)

Electrical offset

The electrical offset voltage V_{OE} can either be measured when the ferro-magnetic parts of the transducer are:

- completely demagnetized, which is difficult to realize,
- or in a known magnetization state, like in the current cycle shown in figure 30.

Using the current cycle shown in figure 30, the electrical offset is:

$$V_{OE} = \frac{V_{OUT}(t_1) + V_{OUT}(t_2)}{2}$$

The temperature variation V_{OT} of the electrical offset voltage V_{OE} is the variation of the electrical offset from 25°C to the considered temperature:

$$V_{OT}(T) = V_{OE}(T) - V_{OE}(25^\circ C)$$

Note: the transducer has to be demagnetized prior to the application of the current cycle (for example with a demagnetization tunnel).

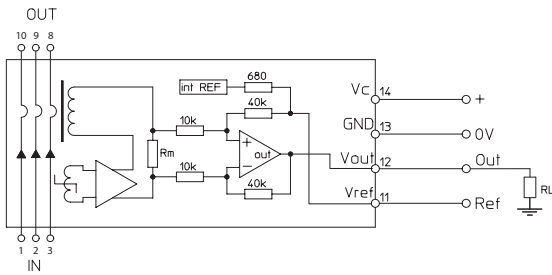


Figure 31: Test connection

Overall accuracy

The overall accuracy at 25°C X_G is the error in the $-I_{PN} \dots +I_{PN}$ range, relative to the rated value I_{PN} .

It includes:

- the electrical offset V_{OE}
- the sensitivity error ϵ_G
- the linearity error ϵ_L (to I_{PN})

The magnetic offset is part of the overall accuracy. It is taken into account in the linearity error figure provided the transducer has not been magnetized by a current higher than I_{PN} .

Response and reaction times

The response time t_r and the reaction time t_{ra} are shown in the next figure.

Both depend on the primary current di/dt . They are measured at nominal ampere-turns.

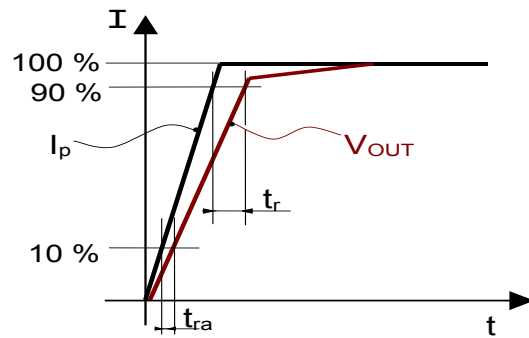


Figure 32: Response time t_r and reaction time t_{ra}

Application information


Filtering and decoupling

Supply voltage V_C

The fluxgate oscillator draws current pulses of up to 30 mA at a rate of ca. 900 kHz. Significant 900 kHz voltage ripple on V_C can indicate a power supply with excessive impedance. At these frequencies power supply rejection ratio is low, and the ripple may appear on the transducer output V_{OUT} and reference V_{REF} . The transducer has internal decoupling capacitors, but in the case of a power supply with excessive impedance, it is advised to provide local decoupling (100 nF or more, located close to the transducer)

Output V_{OUT}

The output V_{OUT} has a very low output impedance of typically 2 Ohms; it can drive 100 pF directly. Adding $R_f = 100$ Ohms allows much larger capacitive loads. Empirical evaluation may be necessary to obtain optimum results. The minimum load resistance on V_{OUT} is 1 kOhm.

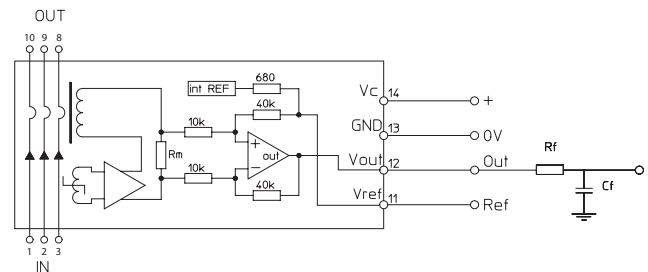

Reference V_{REF}

Ripple present on the reference output can be filtered with a low value of capacitance because of the internal 680 Ohm series resistance. The maximum filter capacitance value is 1 μ F.

Application information (continued)

External reference voltage

If the Ref pin of the transducer is not used it could be either left unconnected or filtered according to the previous paragraph "Reference V_{REF} ".



The Ref pin has two modes Ref IN and Ref OUT:

- In the Ref OUT mode the 2.5 V internal precision reference is used by the transducer as the reference point for bipolar measurements; this internal reference is connected to the Ref pin of the transducer through a 680 Ohms resistor. it tolerates sink or source currents up to ± 5 mA, but the 680 Ohms resistor prevents this current to exceed these limits.
- In the Ref IN mode, an external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V and is directly used by the transducer as the reference point for measurements. The external reference voltage V_{ref} must be able:

- either to source a typical current of $\frac{V_{ref} - 2.5}{680}$, the maximum value will be 2.2 mA typ. when $V_{ref} = 4$ V.

- or to sink a typical current of $\frac{2.5 - V_{ref}}{680}$, the maximum value will be 3.68 mA typ. when $V_{ref} = 0$ V.

The following graphs show how the measuring range of each transducer version depends on the external reference voltage value V_{ref} .

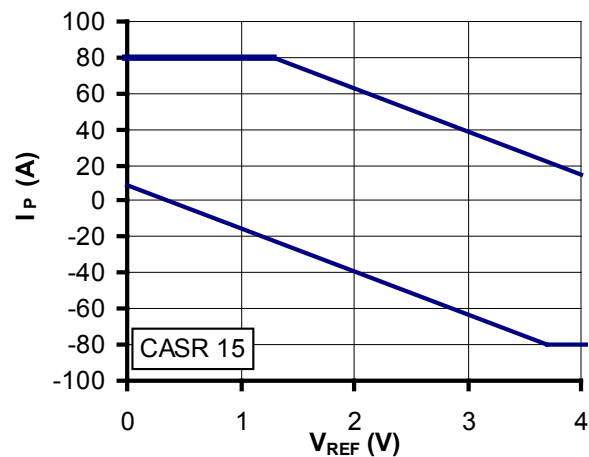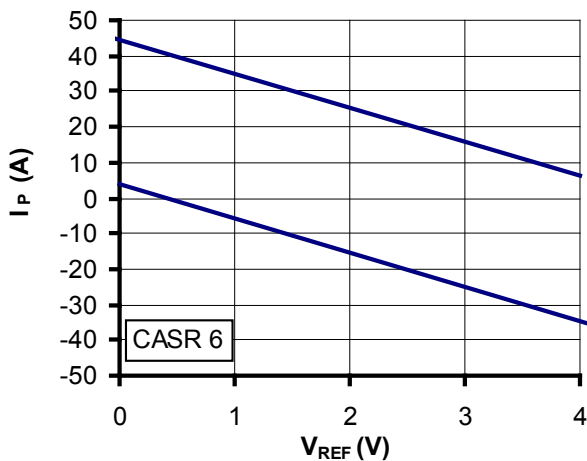

Upper limit : $I_p = -9.6 * V_{ref} + 44.4$ ($V_{ref} = 0 \dots 4$ V)

Lower limit : $I_p = -9.6 * V_{ref} + 3.6$ ($V_{ref} = 0 \dots 4$ V)



Upper limit : $I_p = -24 * V_{ref} + 111$ ($V_{ref} = 1.29 \dots 4$ V)

Upper limit : $I_p = 80$ ($V_{ref} = 0 \dots 1.29$ V)

Lower limit : $I_p = -24 * V_{ref} + 9$ ($V_{ref} = 0 \dots 3.7$ V)

Lower limit : $I_p = -80$ ($V_{ref} = 3.7 \dots 4$ V)

External reference voltage (continued)

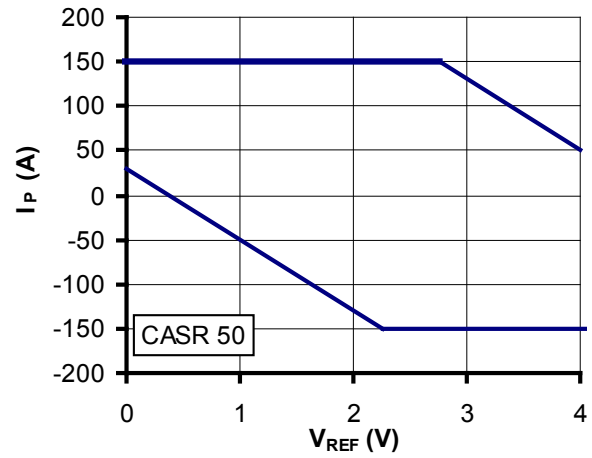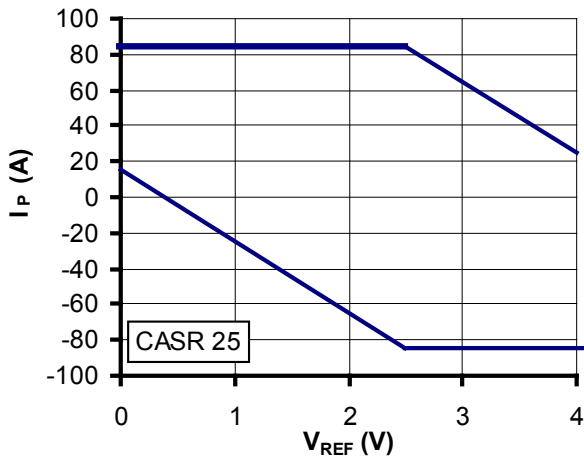

Upper limit : $I_p = -40 * V_{ref} + 185$ (Vref = 2.5 .. 4 V)
 Upper limit : $I_p = 85$ (Vref = 0 .. 2.5 V)
 Lower limit : $I_p = -40 * V_{ref} + 15$ (Vref = 0 .. 2.5 V)
 Lower limit : $I_p = -85$ (Vref = 2.5 .. 4 V)

Upper limit : $I_p = -80 * V_{ref} + 370$ (Vref = 2.75 .. 4 V)
 Upper limit : $I_p = 150$ (Vref = 0 .. 2.75 V)
 Lower limit : $I_p = -80 * V_{ref} + 30$ (Vref = 0 .. 2.25 V)
 Lower limit : $I_p = -150$ (Vref = 2.25 .. 4 V)


Example with $V_{REF} = 1.65$ V:

- The 6 A version has a measuring range from - 12.24 A to + 28.5 A
- The 15 A version has a measuring range from - 30.6 A to + 71.4 A
- The 25 A version has a measuring range from - 51 A to + 85 A
- The 50 A version has a measuring range from - 102 A to + 150 A

Example with $V_{REF} = 0$ V:

- The 6 A version has a measuring range from + 3.6 A to + 44.4 A
- The 15 A version has a measuring range from + 9 A to + 80 A
- The 25 A version has a measuring range from + 15 A to + 85 A
- The 50 A version has a measuring range from + 30 A to + 150 A

CASR Series, PCB footprint

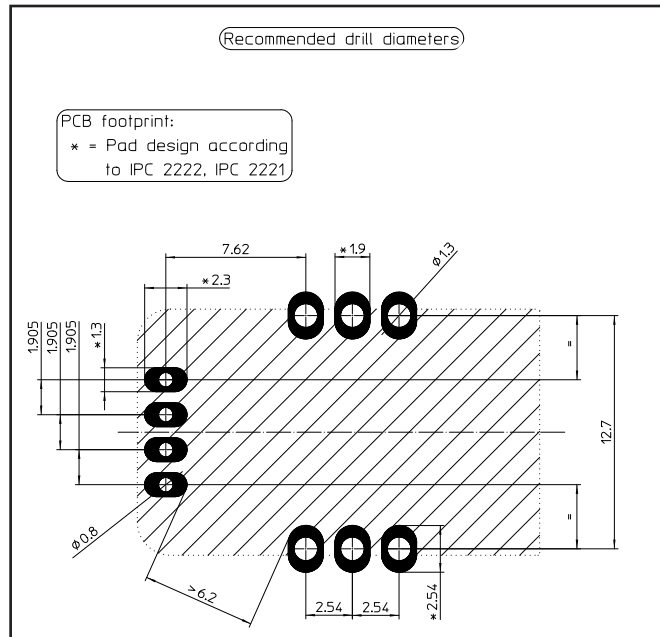

Assembly on PCB

- Recommended PCB hole diameter 1.3 mm for primary pin
0.8 mm for secondary pin
- Maximum PCB thickness 2.4 mm
- Wave soldering profile maximum 260°C for 10 s
No clean process only.

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage. This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used. Main supply must be able to be disconnected.

Dimensions CASR Series (in mm. General linear tolerance ± 0.25 mm)

