

*** BILL OF MATERIAL ***

PT NO.	CATALOG NO.	QTY	DESCRIPTION
1	PATCASELI	1	CASE, TOOL PATRIOT LITHIUM-ION
2	BAT18V5AHLI	2	BATTERY, MAKITA 18V LI-ION 5.0 AH MAKITA P/N BL1850B
3	PATCHGRLI	1	CHARGER, BATTERY LITHIUM ION
4	BATCHGRLIOMI	1	BATTERY CHARGER SAFETY OPERATING MAINTENANCE & INSTRUCTIONS
5	PT208620	1	LANYARD
6	PAT46LIOMI	1	SOMI, PAT46-LI
7	PT2044380I	1	FIVE YEAR WARRANTY CARD
8	LIMSDS	1	MSDS, LITHIUM ION BATTERY

CATALOG NUMBER	DESCRIPTION	CHARGER CATALOG NO.
PAT46LWL5	PATRIOT® PAT46LWL5 WITH 120V CHARGER	PATCHGRLI
PAT46LWL5DC	PATRIOT® PAT46LWL5 WITH 12V CHARGER	PATCHGRLIDC
PAT46LWL5LCB	PATRIOT® PAT46LWL5 LESS CHARGER AND BATTERY	--

PATRIOT®

BATTERY ACTUATED TOOL - HYDRAULIC SELF CONTAINED - 15 TON OUTPUT FORCE


SPECIFICATIONS

CRIMP FORCE: 15 TONS (13.6 METRIC TONS)
 TOOL WEIGHT: 16.8 LBS (7.6 kg)
 LENGTH: 18.59 IN (47.22 cm)
 WIDTH: 3.26 IN (8.28 cm)
 HEIGHT: 13.93 IN (35.38 cm)
 OPERATING VOLTAGE: 18V-DC
 RECHARGE TIME: 45 MINUTES

FEATURES AND BENEFITS

- REFINED HYDRAULIC SYSTEM FOR SUPERIOR PERFORMANCE, SPEED AND RELIABILITY.
- FIELD PROVEN ELECTRONICS FOR ULTIMATE RELIABILITY IN THE HARSHTEST ENVIRONMENTS.
- OVERMOLDED HANDLE FOR COMFORT AND IMPROVED GRIP; ALLOWS FOR ONE-HANDED OPERATION FOR ADVANCE, RETRACT AND HOLD.
- 18 VOLT LITHIUM-ION BATTERIES PROVIDE 2.5 TIMES MORE CHARGE / DISCHARGE CYCLES THAN TRADITIONAL Ni-Cd BATTERIES AND PROVIDE 430% MORE LIFETIME WORK.
- MAKITA CHARGER CONTROLS CURRENT, VOLTAGE AND TEMPERATURE TO MAXIMIZE BATTERY LIFE. FORCED AIR COOLING FAN COOLS THE BATTERY BY FORCING COOL AIR THROUGH THE BATTERY'S BUILT-IN AIR VENTS.
- STATE OF THE ART CRIMPING HEAD DESIGN, 355° ROTATION LETS THE USER GET INTO TIGHT AREAS EASIER.
- ALLOWS USE OF STANDARD BURNDY® DIES ALREADY IN USE.
- DURABLE HIGH IMPACT FORMED CARRYING CASE PROVIDES SUPERIOR PROTECTION AND STORES ALL ACCESSORIES.
- 5 YEAR LIMITED WARRANTY ON THE TOOL, 3 YEAR LIMITED WARRANTY ON THE BATTERIES AND CHARGER.
- LIFETIME WARRANTY ON INFINITY DRIVE®.

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	2018-09-11 00:00:00 EDT	UPDATED AS PER MARKUP	49811	RS	RM

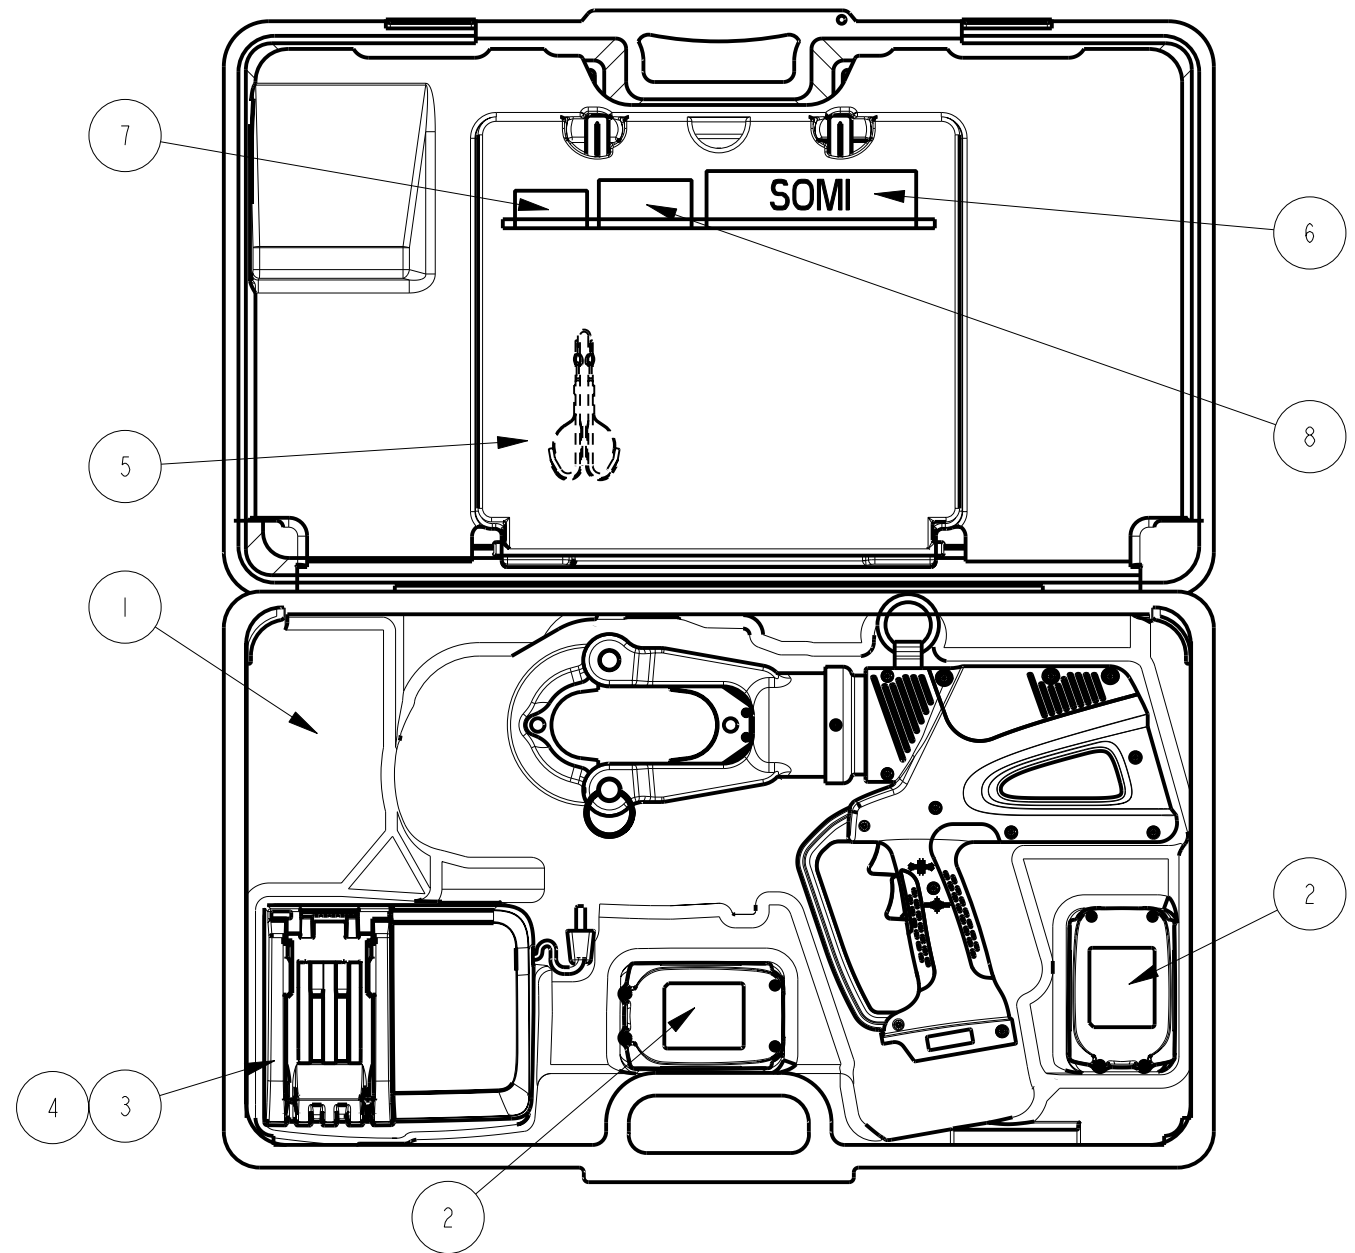

NOTES:

1. TOOL ACCEPTS 18V MAKITA LITHIUM ION BATTERIES, BL SERIES OF SIZE 2.0 AHR AND GREATER IF THE PLASTIC BATTERY CLIP IN THE TOOL HAS A "STAR" MOLDED INTO IT. THE "STAR" IDENTIFIES ACCEPTANCE OF THE BL SERIES BATTERIES.
2. FOR TOOLS WHICH DO NOT HAVE A "STAR" MOLDED INTO THE PLASTIC BATTERY CLIP, USE IS LIMITED TO THE BL 1830 (3.0 AHR) BATTERY. FORCING ANY OTHER BATTERY INTO THIS TOOL WILL VOID THE WARRANTY.



REV: PE0200

TO ORDER BURNDY® PRODUCTS CALL		PATRIOT® PAT46LWL5	
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: 50067993	CAT. NO: DRAWASMS
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: T. FAUCHER 08/15/2016	CHECKER: M. CHIASSON 08/15/2016
FOR PRODUCT INFO: http://www.burndy.com		DSN APPVL: M. CHIASSON 08/19/2016	MFG APPVL: C. TORREY 08/19/2016
		QA APPVL: C. LINDQUIST 08/19/2016	MKT APPVL: P. SILVA 08/19/2016
		SCALE: 1:4	DRAWING NO
		PROJECT #: --	50067995
		DOCUMENT TYPE: Sales	REV
		REL LEVEL: Released	B
		SHEET 1 OF 1	

