

*** BILL OF MATERIAL ***

PT NO.	CATALOG NO.	QTY	DESCRIPTION
1	PATCASEL1	1	CASE, TOOL PATRIOT® LITHIUM-ION
2	BAT18V5AHL1	2	BATTERY, MAKITA 18V LI-ION 5.0 AH MAKITA P/N BL1850B
3	LIMSDS	1	MSDS, LITHIUM ION BATTERY
4	PATCHGRL1	1	CHARGER, BATTERY LITHIUM ION
5	BATCHGRLIOMI	1	BATTERY CHARGER SAFETY OPERATING MAINTENANCE & INSTRUCTIONS
6	PT208620	1	LANYARD
7	PAT750LIOMI	1	SOMI, PAT750-LI
8	PT20443801	1	FIVE YEAR WARRANTY CARD

CATALOG NUMBER	DESCRIPTION	CHARGER CATALOG NO.
PAT750L5	PATRIOT® 750 WITH 120V CHARGER	PATCHGRL1
PAT750L5DC	PATRIOT® 750 WITH 12V DC CHARGER	PATCHGRLDC
PAT750CL5	PATRIOT® 750 (COVERED HEAD) WITH 120V CHARGER	PATCHGRL1
PAT750CL5DC	PATRIOT® 750 (COVERED HEAD) WITH 12V DC CHARGER	PATCHGRLDC

PATRIOT®

BATTERY ACTUATED TOOL - HYDRAULIC SELF CONTAINED - 12 TON OUTPUT FORCE

SPECIFICATIONS

CRIMP FORCE: 12 TONS (10.9 METRIC TONS)
 TOOL WEIGHT: 15.7 LBS (7.1 kg)
 LENGTH: 15.75 (40.00 cm)
 WIDTH: 3.50 (8.89 cm)
 HEIGHT: 13.50 (34.29 cm)
 OPERATING VOLTAGE: 18V-DC
 RECHARGE TIME: 45 MINUTES
 RAM OPENING: MINIMUM 1.653 (42 mm)


FEATURES AND BENEFITS

- REFINED HYDRAULIC SYSTEM FOR SUPERIOR PERFORMANCE, SPEED AND RELIABILITY.
- FIELD PROVEN ELECTRONICS FOR ULTIMATE RELIABILITY IN THE HARSHTEST ENVIRONMENTS.
- OVERMOLDED HANDLE FOR COMFORT AND IMPROVED GRIP; ALLOWS FOR ONE-HANDED OPERATION FOR ADVANCE, RETRACT AND HOLD.
- 18 VOLT LITHIUM-ION BATTERIES PROVIDE 2.5 TIMES MORE CHARGE / DISCHARGE CYCLES THAN TRADITIONAL Ni-Cd BATTERIES AND PROVIDE 430% MORE LIFETIME WORK.
- MAKITA CHARGER CONTROLS CURRENT, VOLTAGE AND TEMPERATURE TO MAXIMIZE BATTERY LIFE. FORCED AIR COOLING FAN COOLS THE BATTERY BY FORCING COOL AIR THROUGH THE BATTERY'S BUILT-IN AIR VENTS.
- STATE OF THE ART CRIMPING HEAD DESIGN, 355° ROTATION LETS THE USER GET INTO TIGHT AREAS EASIER.
- ALLOWS USE OF STANDARD BURNDY® DIES ALREADY IN USE.
- ERGONOMICALLY BALANCED TOOL DESIGN EASES OPERATION AND HELPS LESSEN FATIGUE.
- DURABLE HIGH IMPACT FORMED CARRYING CASE PROVIDES SUPERIOR PROTECTION AND STORES ALL ACCESSORIES.
- 5 YEAR LIMITED WARRANTY ON THE TOOL, 3 YEAR LIMITED WARRANTY ON THE BATTERIES AND CHARGER.
- LIFETIME WARRANTY ON THE INFINITY DRIVE ®

NOTES:

1. LANYARD IS STORED IN COMPARTMENT UNDER THE LID.

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	2018-08-28 00:00:00 EDT	UPDATED AS PER MARKUP	49728	RS	RM

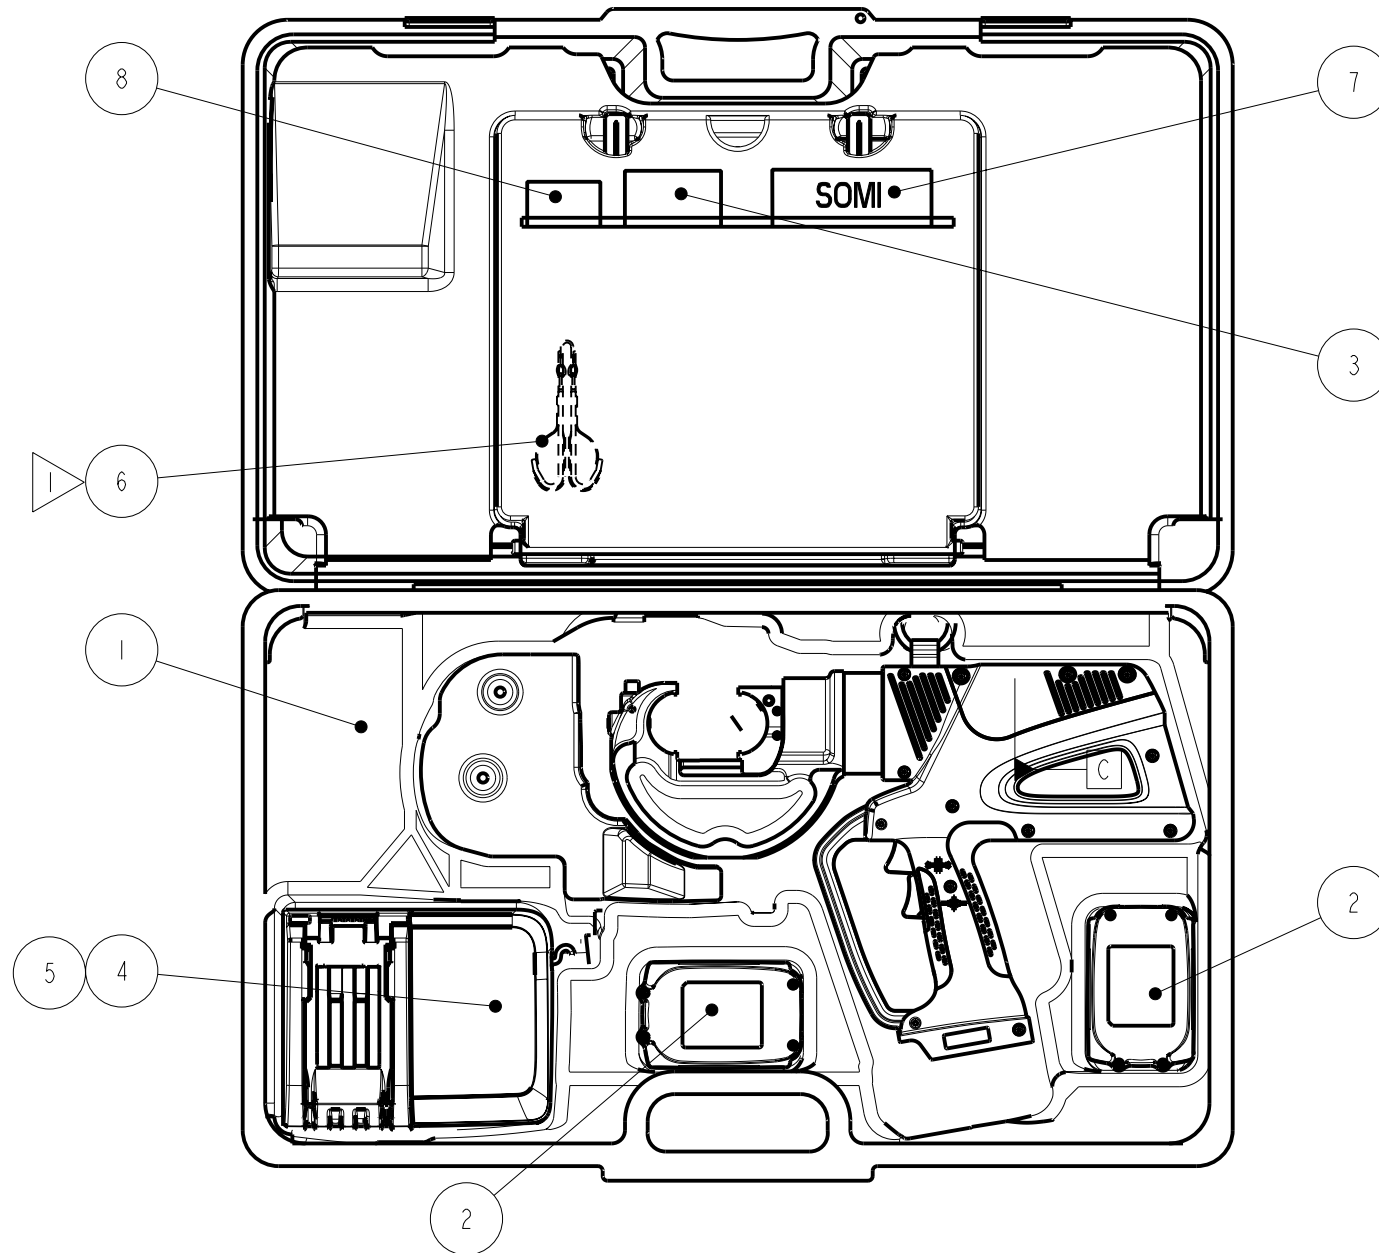

2. TOOL ACCEPTS 18V MAKITA LITHIUM ION BATTERIES, BL SERIES OF SIZE 2.0 AHR AND GREATER IF THE PLASTIC BATTERY CLIP IN THE TOOL HAS A "STAR" MOLDED INTO IT. THE "STAR" IDENTIFIES ACCEPTANCE OF THE BL SERIES BATTERIES.
3. FOR TOOLS WHICH DO NOT HAVE A "STAR" MOLDED INTO THE PLASTIC BATTERY CLIP, USE IS LIMITED TO THE BL 1830 (3.0 AHR) BATTERY. FORCING ANY OTHER BATTERY INTO THIS WILL VOID THE WARRANTY.



TO ORDER BURNDY® PRODUCTS CALL		PATRIOT® BATTERY 12 TON CRIMPING TOOL	
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: --	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: SEE TABLE	
FOR PRODUCT INFO: http://www.burndy.com		SCALE: 1:4	
DRAWN BY: T. FAUCHER 08/12/2016		PROJECT #: 14551	
CHECKER: M. CHIASSON 08/15/2016		SIZE: B	
DSN APPVL: M. CHIASSON 08/19/2016		DRAWING NO: 50068001	
MFG APPVL: C. TORREY 08/19/2016		SHEET 1 OF 1	
QA APPVL: C. LINDQUIST 08/19/2016		REV: B	
MKT APPVL: P. SILVA 08/19/2016			

REV: PE0200