

CATALOG NUMBER	DESCRIPTION	CHARGER CATALOG NUMBER
PATCUT2156L5	PATRIOT®2156 L5 CUTTER WITH 120V CHARGER	PATCHGRL1
PATCUT2156L5DC	PATRIOT®2156 L5 CUTTER WITH 12V CHARGER	PATCHGRL1DC
PATCUT2156L5LCB	PATRIOT®2156 L5 CUTTER LESS CHARGER AND BATTERIES	NO CHARGER

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	2018-09-07 00:00:00 EDT	UPDATED AS PER MARKUP	49802	RS	RM

\*\*\* BILL OF MATERIAL \*\*\*

PT NO.	CATALOG NO.	QTY	DESCRIPTION
1	PATCASEL1	1	CASE, TOOL PATRIOT LITHIUM ION
2	BAT18V5AHL1	2	BATTERY, MAKITA 18V LI-ION 5.0 AH MAKITA P/N BL1850B
3	PATCHGRL1	1	CHARGER, BATTERY LITHIUM ION
4	BATCHGRL1OMI	1	BATTERY CHARGER SAFETY OPERATING MAINTENANCE & INSTRUCTIONS
5	PT208620	1	LANYARD
6	PATCUT2156OMI	1	SOMI, PATCUT2156
7	PT20443801	1	FIVE YEAR WARRANTY CARD
8	DOCWMSDS	1	MSDS, LITHIUM ION BATTERY

FEATURES AND BENEFITS

- REFINED HYDRAULIC SYSTEM FOR ULTRA PERFORMANCE, SPEED AND RELIABILITY.
- FIELD PROVEN ELECTRONICS FOR ULTIMATE RELIABILITY IN THE HARSHTEST ENVIRONMENTS.
- OVERMOLDED HANDLE FOR COMFORT AND IMPROVED GRIP; ALLOWS FOR ONE HANDED OPERATION FOR ADVANCE RETRACT AND HOLD.
- SPECIALIZED LATCH DESIGN FOR INTERFERENCE FREE CLOSURE FOR MID-SPAN CUTS.
- MAKITA 18 VOLT LITHIUM-ION BATTERIES PROVIDE 2.5 TIMES MORE CHARGE/DISCHARGE CYCLES THAN TRADITIONAL Ni-Cd BATTERIES AND PROVIDE 430% MORE LIFETIME WORK.
- MAKITA CHARGER CONTROLS CURRENT, VOLTAGE AND TEMPERATURE TO MAXIMIZE BATTERY LIFE.
- FORCED AIR COOLING FAN COOLS THE BATTERY BY FORCING COOL AIR THROUGH THE BATTERY'S BUILT IN AIR VENTS.
- 180° HEAD ROTATION ALLOWS USER TO GET INTO TIGHT AREAS EASIER.
- ERGONOMICALLY BALANCED TOOL DESIGN EASES OPERATION AND LESSENS FATIGUE.
- DURABLE HIGH IMPACT FORMED CARRYING CASE PROVIDES SUPERIOR PROTECTION AND STORES ALL ACCESSORIES.
- MECHANICAL RAM RELEASE: PROVIDES CONSISTENT, RELIABLE RAM RETRACTION (NO BATTERY POWER CONSUMPTION)
- 5 YEAR LIMITED WARRANTY ON THE TOOL (EXCLUDING BLADES).
- LIFETIME WARRANTY ON INFINITY DRIVE®.
- 3 YEAR LIMITED WARRANTY ON THE BATTERIES AND CHARGER.

PATRIOT®

BATTERY ACTUATED TOOL - HYDRAULIC SELF CONTAINED

SPECIFICATIONS

TOOL WEIGHT: 15.5 LBS [7 kg]  
 LENGTH: 16.46 INCHES [418 mm]  
 WIDTH: 3.27 INCHES [83 mm]  
 HEIGHT: 13.66 INCHES [339 mm]  
 OPERATING VOLTAGE: 18V-DC  
 RECHARGE TIME: < 45 MINUTES


1. READ AND FOLLOW ALL INSTRUCTIONS PROVIDED BY OPERATORS MANUAL, AND WARNING LABELS BEFORE USING THIS TOOL.

2. KIT SHIPPED LESS CHARGER AND BATTERIES FOR EXPORT SALES.

3. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY.

MATERIAL	MAX OD	
ACSR	2156 KCMIL	
Cu & Al	2.0"	(51 mm)
GROUND ROD	3/4"	(19 mm)
REBAR	5/8"	(16 mm)
SOFT STEEL BOLTS	3/4"	(19 mm)
STD. GUY WIRE	9/16"	(14 mm)
EHS GUY WIRE	9/16"	(14 mm)

- TOOL ACCEPTS 18V MAKITA LITHIUM ION BATTERIES, BL SERIES OF SIZE 2.0 AHR AND GREATER IF THE PLASTIC BATTERY CLIP IN THE TOOL HAS A "STAR" MOLDED INTO IT. THE "STAR" IDENTIFIES ACCEPTANCE OF THE BL SERIES BATTERIES.
- FOR TOOLS WHICH DO NOT HAVE A "STAR" MOLDED INTO THE PLASTIC BATTERY CLIP, USE IS LIMITED TO THE BL 1830 (3.0 AHR) BATTERY. FORCING ANY OTHER BATTERY INTO THIS TOOL WILL VOID THE WARRANTY.

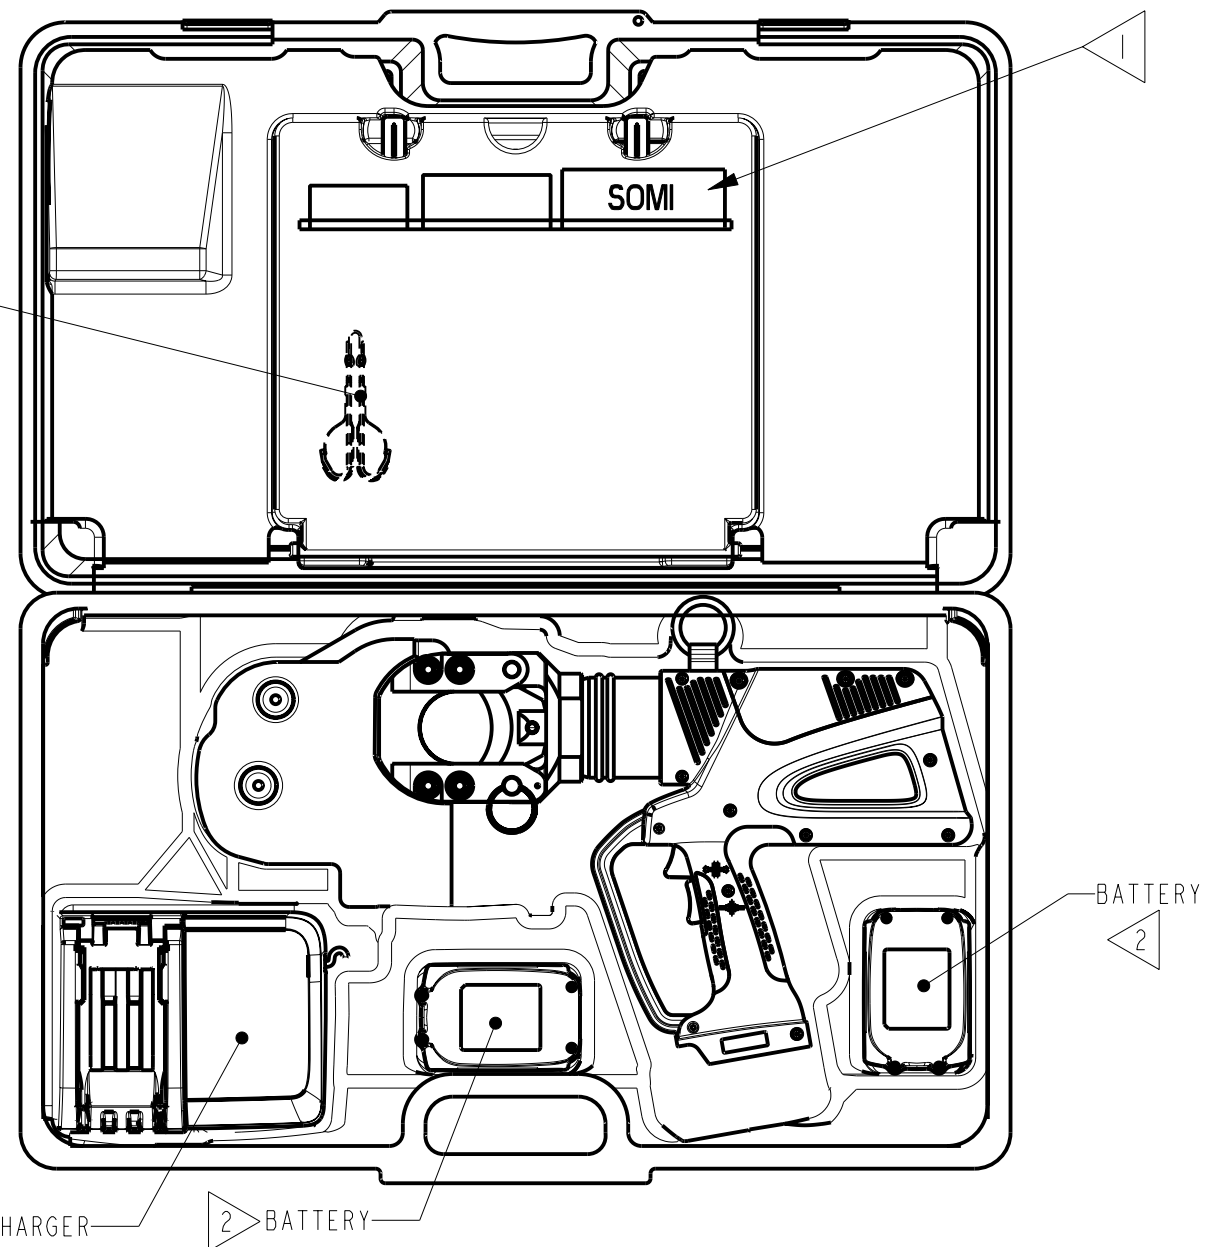

TO ORDER BURNDY® PRODUCTS CALL		PATRIOT® LATCH CUTTER	
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: 50068052	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: PATCUT2156L5	
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>		DRAWN BY: T. FAUCHER 08/16/2016	
		CHECKER: M. CHIASSON 08/16/2016	
		DSN APPVL: M. CHIASSON 08/19/2016	
		MFG APPVL: C. TORREY 08/19/2016	
		QA APPVL: C. LINDQUIST 08/19/2016	
		MKT APPVL: P. SILVA 08/19/2016	
		SCALE: 7:32	
		PROJ FAM: TOOLS, BATTERY	
		DRAWING NO	
		PROJECT #: --	
		SIZE	
		50068054	
		DOCUMENT TYPE: Sales	
		REL LEVEL: Released	
		SHEET 1 OF 1	
		REV	
		B	

REV: PE0200