



## **CB-22 INSTALLATION INSTRUCTIONS**



244 Bergen Boulevard, Woodland Park, NJ 07424, Phone: 973.785.4347 - Fax: 973.785.4207

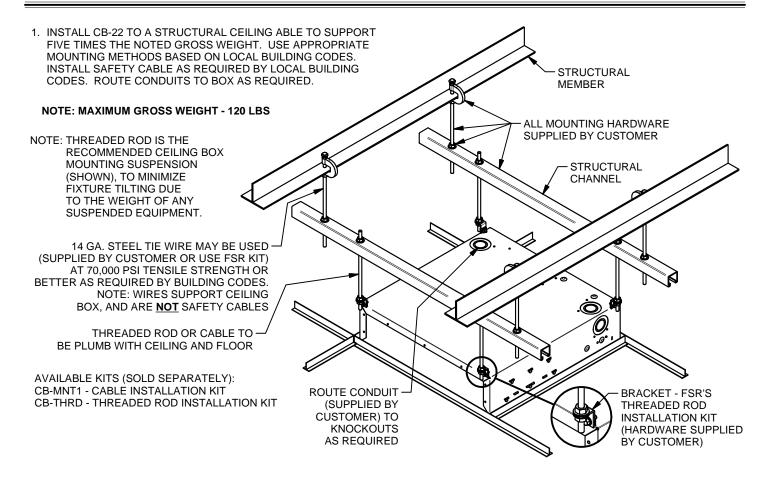

- TO INSTALL AC MAIN POWER INTO THE UNIT, REMOVE THE AC ACCESS PLATE BY REMOVING (4) #8-32 SCREWS, AS SHOWN. WIRING MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN ONLY. WIRING MUST BE DONE IN ACCORDANCE WITH ALL NEC AND OTHER APPLICABLE CODES. RE-INSTALL AC ACCESS PLATE AFTER AC WIRING IS COMPLETE.
- 3. REMOVE CEILING BOX DOOR. INSTALLATION OF 19-3/8" x 22-3/4" DROP CEILING PANEL MATERIAL INTO DOOR CAN BE DONE NOW, WHILE DOOR IS OFF, OR DURING RE-ASSEMBLY. BEND CAPTURE TABS OVER CEILING PANEL TO HOLD IN PLACE.

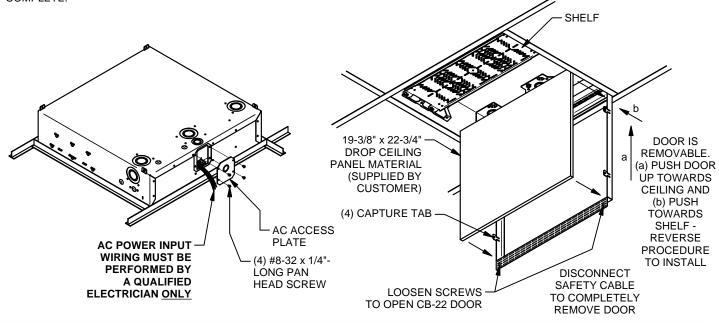

43192 LIT1321B






244 Bergen Boulevard, Woodland Park, NJ 07424, Phone: 973.785.4347 - Fax: 973.785.4207


4a. REMOVE SHELF, AND MOUNT ELECTRONICS TO SHELF. USE HOLE/SLOT PATTERN ON SHELF TO MOUNT EQUIPMENT. ADDITIONAL HOLES MAY BE REQUIRED. SEE 4b. FOR INSTALLING RACK MOUNTED UNITS. RE-INSTALL SHELF INTO CB-22. MAKE ELECTRICAL CONNECTIONS AS REQUIRED.

## NOTE: MAXIMUM LOAD PER SHELF - 20 LBS EACH

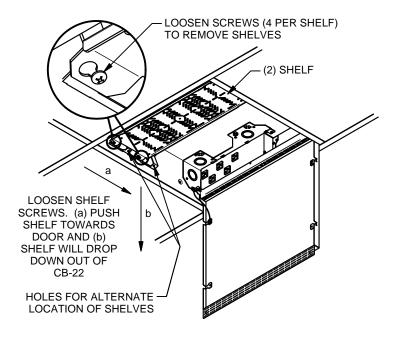

4b. FOR 1RU x 19" EIA RACK-SIZED ELECTRONICS, INSTALL RACK MOUNT BRACKETS AS SHOWN. INSTALL RACK UNIT AND RE-INSTALL SHELF INTO CB-22. MAKE ELECTRICAL CONNECTIONS AS REQUIRED.

## NOTE: MAXIMUM LOAD PER SHELF - 20 LBS EACH

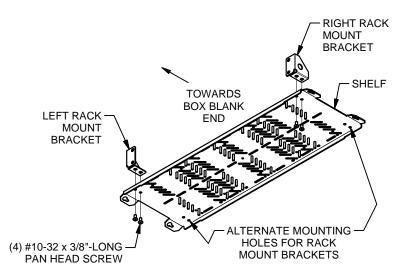

43192 LIT1321B