


Autonics DIGITAL PANEL METER M4N SERIES

INSTRUCTION MANUAL

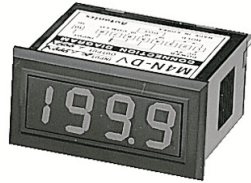

Thank you for choosing our Autonics product.
Please read the following safety considerations before use.

Ordering Information

M	4	N	-	DV	-	0	1
Item	Size	Digit	Measurement function (input)	Power supply	Measurement input	DC volt input F.S. / DC ampere input F.S.	
						1	199.9mV / 199.9μA
						2	1.999V / 1.999mA
						3	19.99V / 19.99mA
						4	199.9V / 199.9mA
						X	Option / Option
				0		0	5VDC
				1		1	12-24VDC
			DV				DC voltage
			DA				DC current
			DI				DC4-20mA (scaling meter)*1
		N					DIN W48×H24mm
		4					1999 (3½-digit)
		M					Meter

※1: 1-5VDC measurement input is option.


Specifications

Model	M4N-DV-□□	M4N-DA-□□	M4N-DI-□X
Measurement function	DC voltage	DC current	DC4-20mA
Power supply	5VDC≒, 12-24VDC≒		
Allowable voltage range	90 to 110% of rated voltage		
Power consumption	2W		
Display method	7-segment LED Display (red) (character height: 10mm)		
Max. display range	1999		
Display accuracy	F.S.±0.2%rdg ±1-digit		
Sampling cycle	300ms		
A/D conversion method	Dual intergal method		
Response time	Approx. 2 sec (0 to 1999)		
Max. allowable input	150% of measurement input range		
Sampling time	2.5 times/sec		
Insulation resistance	Over 100MΩ (at 500VDC megger)		
Dielectric strength	2000VAC 50/60Hz for 1 minute		
Noise immunity	±100V the square wave noise (pulse width: 1μs) by the noise simulator		
Vibration	Mechanical	0.75mm amplitude at frequency of 10 to 55Hz in each X, Y, Z direction for 1 hour	
	Malfunction	0.5mm amplitude at frequency of 10 to 55Hz in each X, Y, Z direction for 10 minutes	
Shock	Mechanical	300m/s ² (approx. 30G) in each X, Y, Z direction for 3 times	
	Malfunction	100m/s ² (approx. 10G) in each X, Y, Z direction for 3 times	
Environ	Ambient temp.	-10 to 50°C, storage: -20 to 60°C	
	Ambient humi.	35 to 85%RH, storage: 35 to 85%RH	
Unit weight	Approx. 44g		

※Environment resistance is rated at no freezing or condensation.


Connections of Applications

Simultaneous connection of voltmeter and ammeter

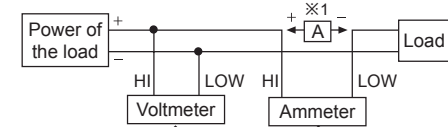

- ※1: Compared to measurement input range, higher measuring voltage needs a multiplier and lower measuring voltage needs a shunt.
- ※When using voltmeter and ammeter simultaneously, connect the separated power supply each.
- ※(-) terminal of the power and (-) terminal of measurement input are shorted.


Mounting



※Panel board thickness should be less than 10mm.


Dimensions

(unit: mm)

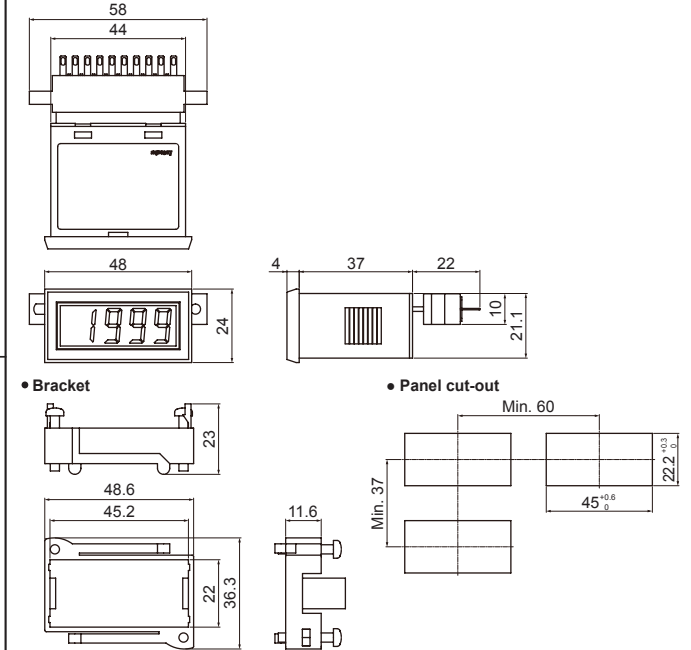

Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, it may cause unexpected accidents.
- 5VAC, 12-24VDC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Install a power switch or circuit breaker in the easily accessible place for supplying or disconnecting the power.
- Keep away from high voltage lines or power lines to prevent inductive noise. In case installing power line and input signal line closely, use line filter or varistor at power line and shielded wire at input signal line. Do not use near the equipment which generates strong magnetic force or high frequency noise.

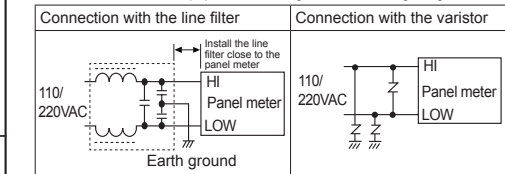

- This unit may be used in the following environments.
 - ①Indoors (in the environment condition rated in 'Specifications')
 - ②Altitude max. 2,000m
 - ③Pollution degree 2
 - ④Installation category II

Safety Considerations

- ※Please observe all safety considerations for safe and proper product operation to avoid hazards.
- ※⚠ symbol represents caution due to special circumstances in which hazards may occur.

⚠ Warning Failure to follow these instructions may result in serious injury or death.
⚠ Caution Failure to follow these instructions may result in personal injury or product damage.


Warning

- Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss.** (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)
Failure to follow this instruction may result in fire, personal injury, or economic loss.
- Install on a device panel to use.**
Failure to follow this instruction may result in fire.
- Do not connect, repair, or inspect the unit while connected to a power source.**
Failure to follow this instruction may result in fire.
- Check 'Connections' before wiring.**
Failure to follow this instruction may result in fire.
- Do not disassemble or modify the unit.**
Failure to follow this instruction may result in fire.

Caution

- Use the unit within the rated specifications.**
Failure to follow this instruction may result in fire or product damage.
- Use dry cloth to clean the unit, and do not use water or organic solvent.**
Failure to follow this instruction may result in fire.
- Do not use the unit in the place where flammable/explosive/corrosive gas, humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.**
Failure to follow this instruction may result in fire or explosion.
- Keep metal chip, dust, and wire residue from flowing into the unit.**
Failure to follow this instruction may result in fire or product damage.

Connections

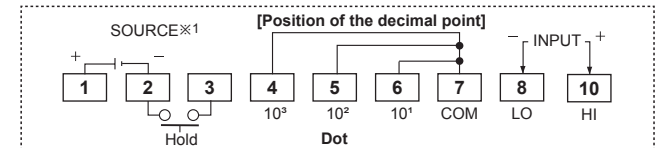

- ※1: 5VDC, 12-24VDC
- ※When changing the position of the decimal point, disconnect switching pattern point on PCB and change the decimal point in external terminal socket.
- ※When "I" or "-" is flashes with a certain measurement input, disconnect power supply and then check the cables.
- ※The above specifications are subject to change and some models may be discontinued without notice.
- ※Be sure to follow cautions written in the instruction manual and the technical descriptions (catalog, homepage).

Major products

- Photoelectric Sensors
- Fiber Optic Sensors
- Door Sensors
- Door Side Sensors
- Area Sensors
- Proximity Sensors
- Pressure Sensors
- Rotary Encoders
- Connector/Sockets
- Switching Mode Power Supplies
- Control Switches/Lamps/Buzzers
- I/O Terminal Blocks & Cables
- Stepper Motors/Drivers/Motion Controllers
- Graphic/Logic Panels
- Field Network Devices
- Laser Marking System (Fiber, Co., Nd: YAG)
- Laser Welding/Cutting System
- Temperature Controllers
- Temperature/Humidity Transducers
- SSRs/Power Controllers
- Counters
- Timers
- Panel Meters
- Tachometer/Pulse (Rate) Meters
- Display Units
- Sensor Controllers

Autonics Corporation
http://www.autonics.com

■ HEADQUARTERS:
18, Bansong-ro 513beon-gil, Haundae-gu, Busan,
South Korea, 48002
TEL: 82-51-519-3232
■ E-mail: sales@autonics.com