

RIGOL

Performance Verification Guide

**MSO2000A/DS2000A Series
Digital Oscilloscope**

**Oct. 2014
RIGOL Technologies, Inc.**

Guaranty and Declaration

Copyright

© 2014 RIGOL Technologies, Inc. All Rights Reserved.

Trademark Information

RIGOL is a registered trademark of RIGOL Technologies, Inc.

Publication Number

PVA18101-1110

Notices

- **RIGOL** products are covered by P.R.C. and foreign patents, issued and pending.
- **RIGOL** reserves the right to modify or change parts of or all the specifications and pricing policies at company's sole decision.
- Information in this publication replaces all previously corresponding material.
- Information in this publication is subject to change without notice.
- **RIGOL** shall not be liable for either incidental or consequential losses in connection with the furnishing, use or performance of this manual as well as any information contained.
- Any part of this document is forbidden to be copied, photocopied or rearranged without prior written approval of **RIGOL**.

Product Certification

RIGOL guarantees this product conforms to the national and industrial standards in China as well as the ISO9001:2008 standard and the ISO14001:2004 standard. Other international standard conformance certification is in progress.

Contact Us

If you have any problem or requirement when using our products or this manual, please contact **RIGOL**.

E-mail: service@rigol.com

Website: www.rigol.com

General Safety Summary

Please review the following safety precautions carefully before putting the instrument into operation so as to avoid any personal injury or damage to the instrument and any product connected to it. To prevent potential hazards, please use the instrument only specified by this manual.

Use Proper Power Cord.

Only the power cord designed for the instrument and authorized for use within the local country could be used.

Ground the Instrument.

The instrument is grounded through the Protective Earth lead of the power cord. To avoid electric shock, it is essential to connect the earth terminal of the power cord to the Protective Earth terminal before connecting any inputs or outputs.

Connect the Probe Correctly.

If a probe is used, do not connect the ground lead to high voltage since it has isobaric electric potential as the ground.

Observe All Terminal Ratings.

To avoid fire or shock hazard, observe all ratings and markers on the instrument and check your manual for more information about ratings before connecting the instrument.

Use Proper Overvoltage Protection.

Make sure that no overvoltage (such as that caused by a thunderstorm) can reach the product, or else the operator might be exposed to the danger of electrical shock.

Do Not Operate Without Covers.

Do not operate the instrument with covers or panels removed.

Do Not Insert Anything Into the Holes of Fan.

Do not insert anything into the holes of the fan to avoid damaging the instrument.

Use Proper Fuse.

Please use the specified fuses.

Avoid Circuit or Wire Exposure.

Do not touch exposed junctions and components when the unit is powered.

Do Not Operate With Suspected Failures.

If you suspect damage occurs to the instrument, have it inspected by **RIGOL** authorized personnel before further operations. Any maintenance, adjustment or replacement especially to circuits or accessories must be performed by **RIGOL** authorized personnel.

Keep Well Ventilation.

Inadequate ventilation may cause an increase of temperature or damage to the device. So please keep the instrument well ventilated and inspect the intake and fan regularly.

Do Not Operate in Wet Conditions.

In order to avoid short circuiting to the interior of the device or electric shock, please do not operate the instrument in a humid environment.

Do Not Operate in an Explosive Atmosphere.

In order to avoid damage to the device or personal injuries, it is important to operate the device away from an explosive atmosphere.

Keep Product Surfaces Clean and Dry.

To avoid the influence of dust and/or moisture in the air, please keep the surface of the device clean and dry.

Electrostatic Prevention.

Operate the instrument in an electrostatic discharge protective environment to avoid damage induced by static discharges. Always ground both the internal and external conductors of cables to release static before making connections.

Proper Use of Battery.

If a battery is supplied, it must not be exposed to high temperature or in contact with fire. Keep it out of the reach of children. Improper change of battery (note: lithium battery) may cause explosion. Use **RIGOL** specified battery only.

Handling Safety.

Please handle with care during transportation to avoid damage to buttons, knob interfaces and other parts on the panels.

Safety Terms and Symbols

Terms Used in this Manual. These terms may appear in this manual:

**WARNING**

Warning statements indicate conditions or practices that could result in injury or loss of life.

**CAUTION**

Caution statements indicate conditions or practices that could result in damage to this product or other property.

Terms Used on the Product. These terms may appear on the Product:

DANGER indicates an injury or hazard may immediately happen.
WARNING indicates an injury or hazard may occur.
CAUTION indicates potential damage to the instrument or other property might occur.

Symbols Used on the Product. These symbols may appear on the product:



Hazardous Voltage



Safety Warning



Protective Earth Terminal



Chassis Ground



Test Ground

Allgemeine Sicherheits Informationen

Überprüfen Sie die folgenden Sicherheitshinweise sorgfältig um Personenschäden oder Schäden am Gerät und an damit verbundenen weiteren Geräten zu vermeiden. Zur Vermeidung von Gefahren, nutzen Sie bitte das Gerät nur so, wie in diesem Handbuche angegeben.

Um Feuer oder Verletzungen zu vermeiden, verwenden Sie ein ordnungsgemäßes Netzkabel.

Verwenden Sie für dieses Gerät nur das für ihr Land zugelassene und genehmigte Netzkabel.

Erden des Gerätes.

Das Gerät ist durch den Schutzleiter im Netzkabel geerdet. Um Gefahren durch elektrischen Schlag zu vermeiden, ist es unerlässlich, die Erdung durchzuführen. Erst dann dürfen weitere Ein- oder Ausgänge verbunden werden.

Anschluss eines Tastkopfes.

Die Erdungsklemmen der Sonden sind auf dem gleichen Spannungspegel des Instruments geerdet. Schließen Sie die Erdungsklemmen an keine hohe Spannung an.

Beachten Sie alle Anschlüsse.

Zur Vermeidung von Feuer oder Stromschlag, beachten Sie alle Bemerkungen und Markierungen auf dem Instrument. Befolgen Sie die Bedienungsanleitung für weitere Informationen, bevor Sie weitere Anschlüsse an das Instrument legen.

Verwenden Sie einen geeigneten Überspannungsschutz.

Stellen Sie sicher, daß keinerlei Überspannung (wie z.B. durch Gewitter verursacht) das Gerät erreichen kann. Andernfalls besteht für den Anwender die Gefahr eines Stromschlages.

Nicht ohne Abdeckung einschalten.

Betreiben Sie das Gerät nicht mit entfernten Gehäuse-Abdeckungen.

Betreiben Sie das Gerät nicht geöffnet.

Der Betrieb mit offenen oder entfernten Gehäuseteilen ist nicht zulässig. Nichts in entsprechende Öffnungen stecken (Lüfter z.B.)

Passende Sicherung verwenden.

Setzen Sie nur die spezifikationsgemäßen Sicherungen ein.

Vermeiden Sie ungeschützte Verbindungen.

Berühren Sie keine unisolierten Verbindungen oder Baugruppen, während das Gerät in Betrieb ist.

Betreiben Sie das Gerät nicht im Fehlerfall.

Wenn Sie am Gerät einen Defekt vermuten, sorgen Sie dafür, bevor Sie das Gerät wieder betreiben, dass eine Untersuchung durch **RIGOL** autorisiertem Personal durchgeführt wird. Jedwede Wartung, Einstellarbeiten oder Austausch von Teilen am Gerät, sowie am Zubehör dürfen nur von **RIGOL** autorisiertem Personal durchgeführt werden.

Belüftung sicherstellen.

Unzureichende Belüftung kann zu Temperaturanstiegen und somit zu thermischen Schäden am Gerät führen. Stellen Sie deswegen die Belüftung sicher und kontrollieren regelmäßig Lüfter und Belüftungsöffnungen.

Nicht in feuchter Umgebung betreiben.

Zur Vermeidung von Kurzschluß im Geräteinneren und Stromschlag betreiben Sie das Gerät bitte

niemals in feuchter Umgebung.

Nicht in explosiver Atmosphäre betreiben.

Zur Vermeidung von Personen- und Sachschäden ist es unumgänglich, das Gerät ausschließlich fernab jedweder explosiven Atmosphäre zu betreiben.

Geräteoberflächen sauber und trocken halten.

Um den Einfluß von Staub und Feuchtigkeit aus der Luft auszuschließen, halten Sie bitte die Geräteoberflächen sauber und trocken.

Schutz gegen elektrostatische Entladung (ESD).

Sorgen Sie für eine elektrostatisch geschützte Umgebung, um somit Schäden und Funktionsstörungen durch ESD zu vermeiden. Erden Sie vor dem Anschluß immer Innen- und Außenleiter der Verbindungsleitung, um statische Aufladung zu entladen.

Die richtige Verwendung des Akkus.

Wenn eine Batterie verwendet wird, vermeiden Sie hohe Temperaturen bzw. Feuer ausgesetzt werden. Bewahren Sie es außerhalb der Reichweite von Kindern auf. Unsachgemäße Änderung der Batterie (Anmerkung: Lithium-Batterie) kann zu einer Explosion führen. Verwenden Sie nur von **RIGOL** angegebene Akkus.

Sicherer Transport.

Transportieren Sie das Gerät sorgfältig (Verpackung!), um Schäden an Bedienelementen, Anschlüssen und anderen Teilen zu vermeiden.

Sicherheits Begriffe und Symbole

Begriffe in diesem Guide. Diese Begriffe können in diesem Handbuch auftauchen:

**WARNING**

Die Kennzeichnung WARNING beschreibt Gefahrenquellen die leibliche Schäden oder den Tod von Personen zur Folge haben können.

**CAUTION**

Die Kennzeichnung Caution (Vorsicht) beschreibt Gefahrenquellen die Schäden am Gerät hervorrufen können.

Begriffe auf dem Produkt. Diese Bedingungen können auf dem Produkt erscheinen:

DANGER weist auf eine Verletzung oder Gefährdung hin, die sofort geschehen kann.

WARNING weist auf eine Verletzung oder Gefährdung hin, die möglicherweise nicht sofort geschehen.

CAUTION bedeutet, dass eine mögliche Beschädigung des Instruments oder anderer Gegenstände auftreten kann.

Symbole auf dem Produkt. Diese Symbole können auf dem Produkt erscheinen:



GefährlicheS
pannung



Sicherheits-
Hinweis



Schutz-erde



Gehäusemasse



Erde

Document Overview






This manual is used to guide users to correctly test the performance specifications of **RIGOL** MSO2000A/DS2000A series digital oscilloscope. For the operation methods used in the test procedures, please refer to the corresponding User's Guide.

Main Topics in this Manual:

Chapter 1 Overview	This chapter introduces the preparations before performing the performance verification tests and the notices.
Chapter 2 Performance Verification Test	This chapter introduces the limit, test devices required as well as the test method and procedures of each performance specification.
Appendix Test Record Form	The appendix provides a test record form for users to record the test results and judge whether each performance specification can meet the requirement.

Format Conventions in this Manual:

- Key:** the keys at the front panel are denoted by the format of "Button Name (Bold) + Text Box". For example, **Utility** denotes the "Utility" key.
- Menu:** the menu items are denoted by the format of "Menu Word (Bold) + Character Shading". For example, **System** denotes the "System" menu item under **Utility**.
- Operation Step:** the next step of operation is denoted by an arrow "→". For example, **Utility** → **System** denotes pressing **Utility** at the front panel and then pressing **System**.
- Knob:**

Label	Knob	Label	Knob
HORIZONTAL SCALE 	Horizontal Scale Knob	VERTICAL SCALE 	Channel Vertical Scale Knob
HORIZONTAL POSITION 	Horizontal Position Knob	VERTICAL POSITION 	Channel Vertical Position Knob
TRIGGER LEVEL 	Trigger Level Knob	--	--

Content Conventions in this Manual:

MSO2000A/DS2000A series includes the following models. In this manual, MSO2302A-S is taken as an example to illustrate the performance verification test methods. Unless otherwise noted, the introductions in this manual are applicable to other models.

Model	Analog Bandwidth	Number of Analog Channels	Number of Signal Source Channels	Number of Digital Channels
MSO2072A	70 MHz	2	--	16
MSO2072A-S	70 MHz	2	2	16
MSO2102A	100 MHz	2	--	16
MSO2102A-S	100 MHz	2	2	16
MSO2202A	200 MHz	2	--	16
MSO2202A-S	200 MHz	2	2	16
MSO2302A	300 MHz	2	--	16
MSO2302A-S	300 MHz	2	2	16
DS2072A	70 MHz	2	--	--
DS2072A-S	70 MHz	2	2	--
DS2102A	100 MHz	2	--	--
DS2102A-S	100 MHz	2	2	--
DS2202A	200 MHz	2	--	--
DS2202A-S	200 MHz	2	2	--
DS2302A	300 MHz	2	--	--
DS2302A-S	300 MHz	2	2	--

Contents

Guaranty and Declaration	I
General Safety Summary	II
Safety Terms and Symbols	III
Allgemeine Sicherheits Informationen	IV
Sicherheits Begriffe und Symbole	VI
Document Overview	VII
Chapter 1 Overview	1-1
Test Preparations	1-1
Self-test	1-1
Self-calibration	1-1
Test Result Record	1-1
Specifications	1-2
Chapter 2 Performance Verification Test	2-1
Impedance Test	2-2
Specification	2-2
Test Connection Diagram.....	2-2
Test Procedures.....	2-2
Test Record Form	2-3
DC Gain Accuracy Test.....	2-4
Specification	2-4
Test Connection Diagram.....	2-4
Test Procedures.....	2-4
Test Record Form	2-6
Bandwidth Test	2-8
Specification	2-8
Test Connection Diagram.....	2-8
Test Procedures.....	2-8
Test Record Form	2-9
Bandwidth Limit Test.....	2-10
Specification	2-10
Test Connection Diagram.....	2-10
Test Procedures.....	2-10
Test Record Form	2-13
Time Base Accuracy Test.....	2-15
Specification	2-15
Test Connection Diagram.....	2-15
Test Procedures.....	2-15
Test Record Form	2-16
Zero Point Offset Test	2-17
Specification	2-17
Test Connection Diagram.....	2-17
Test Procedures.....	2-17
Test Record Form	2-18
Appendix Test Record Form	1


Chapter 1 Overview

Test Preparations

The following preparations should be done before the test:

1. Self-test: perform self-test to make sure that the oscilloscope can work normally.
2. Warm-up: make sure that the oscilloscope has been warmed up for at least 30 minutes.
3. Self-calibration: calibrate the oscilloscope.




Self-test

When the oscilloscope is in power-on state, press the power key  at the lower left corner of the front panel to start the oscilloscope. During the start-up, the instrument performs a series of self-test items and you can hear the sound of relay switching. The welcome screen is displayed after the self-test is finished.

If the self-test fails, make sure that the problems are found and resolved and do not perform self-calibration and performance tests until the instrument passes the self-test.

Self-calibration

Make sure that the oscilloscope has been warmed up or running for more than 30 minutes before performing self-calibration. Follow the steps below to perform self-calibration.

1. Disconnect the connections of all the channels.
2. Press **Utility** → **Self-Cal**; press **Start** to execute self-calibration.
3. The self-calibration lasts for about 5 minutes. After the self-calibration is finished, the oscilloscope restarts automatically.
4. Press **Acquire** → **Acquisition** and use  to select "Average"; press **Averages** and use  to set it to 16.
5. Press the **VERTICAL**  **POSITION** knobs of the two channels respectively to reset the vertical positions of the two channels to 0. View the distance from the waveform of each channel to the screen center at 1 mV/div scale. If the distance is greater than 0.2 div, please perform self-calibration again until the calibration succeeds (note: make sure that the oscilloscope passes the self-calibration before performing performance verification test; otherwise, the test results might be inaccurate).

Test Result Record

Record and keep the test result of each test. In the Appendix of this manual, a test result record form which lists all the test items and their corresponding performance limits as well as spaces for users to record the test results, is provided.

Tip:

It is recommended that users photocopy the test record form before each test and record the test results in the copy so that the form can be used repeatedly.

Specifications

The specification of each test item is provided in chapter 2. For other specifications, refer to *MSO2000A/DS2000A User's Guide* or *MSO2000A/DS2000A Data Sheet* (can be downloaded from www.rigol.com).

Tip:

All the specifications are only valid when the oscilloscope has been warmed up for more than 30 minutes.

Chapter 2 Performance Verification Test

This chapter introduces the performance verification test methods and procedures of MSO2000A/DS2000A series digital oscilloscope by taking MSO2302A-S as an example. Fluke 9500B is used in this manual for the tests. You can also use other devices that fulfill the "Specification" in Table 2-1.

Table 2-1 Test Devices Required

Test Plan	Device	Specification	Recommended Model
Plan 1	Oscilloscope Calibrator	DC output voltage range: 1 M Ω : 1 mV to 200 V 50 M Ω : 1 mV to 200 V Fast edge signal rise time: ≤ 150 ps	Fluke 9500B
Plan 2	Digital Multimeter	The resistance measurement accuracy is higher than $\pm 0.1\%$ of reading	RIGOL DM3058/3068
	Test Cable	BNC (M)-Dual banana plug cable	--
	Function/Arbitrary Waveform Generator	Frequency accuracy: ± 1 ppm	RIGOL DG5000 Series
	Dual-BNC Cable	BNC (M)-BNC (M) cable	--

Note:

1. Make sure that the oscilloscope passes the self-test and self-calibration is performed before executing the performance verification tests.
2. Make sure that the oscilloscope has been warmed up for at least 30 minutes before executing any of the following tests.
3. Please reset the instrument to the factory setting before or after executing any of the following tests.

Impedance Test

Specification

Input Impedance	
Analog Channel	1 M Ω : 0.99 M Ω to 1.01 M Ω
	50 Ω : 49.25 Ω to 50.75 Ω

Test Connection Diagram

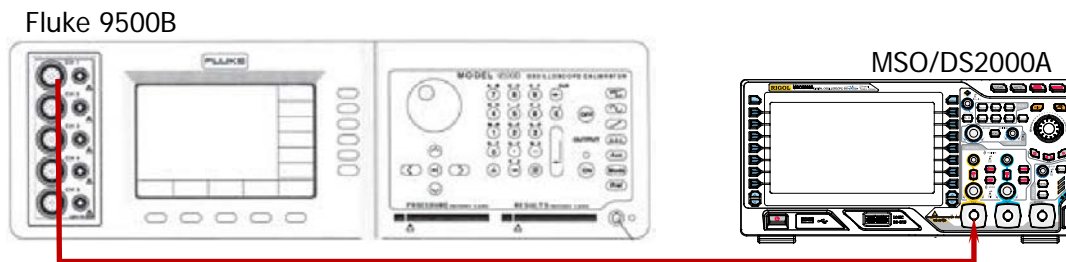


Figure 2-1 Impedance Test Connection Diagram

Test Procedures

1. Impedance test of CH1 and CH2 when the input impedance is 1 M Ω

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
- 2) Configure the oscilloscope:
 - a) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - b) Press **CH1** → **Input** to set the input impedance of CH1 to 1 M Ω .
 - c) Rotate **VERTICAL** **SCALE** to set the vertical scale of CH1 to 100 mV/div.
- 3) Turn on Fluke 9500B; set its impedance to 1 M Ω and select the resistance measurement function. Read and record the resistance measured.
- 4) Rotate **VERTICAL** **SCALE** to adjust the vertical scale of CH1 of the oscilloscope to 500 mV/div; read and record the resistance measured.
- 5) Turn off CH1. Repeat the steps above to test the impedance of CH2 and record the measurement results.

2. Impedance test of CH1 and CH2 when the input impedance is 50 Ω

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
- 2) Configure the oscilloscope:
 - a) Turn on CH1.
 - b) Set the input impedance of CH1 to 50 Ω .
 - c) Set the vertical scale of CH1 to 100 mV/div.
- 3) Turn on Fluke 9500B; set its impedance to 50 Ω and select the resistance measurement function. Read and record the resistance measured.
- 4) Adjust the vertical scale of CH1 of the oscilloscope to 500 mV/div; read and record the resistance measured.
- 5) Turn off CH1. Repeat the steps above to test the impedance of CH2 and record the measurement results.

3. Impedance test of the [EXT TRIG] channel (the input impedance of this channel is 1 M Ω by default)

- 1) Disconnect the connections of the two input channels.
- 2) Connect the external trigger channel [EXT TRIG] with the active signal terminal of Fluke 9500B.
- 3) Turn on Fluke 9500B; set its impedance to 1 M Ω and select the resistance measurement function. Read and record the resistance measured.

Test Record Form

CH1 and CH2 (1 M Ω Input Impedance)

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	100 mV/div		0.99 M Ω to 1.01 M Ω	
	500 mV/div			
CH2	100 mV/div			
	500 mV/div			

CH1 and CH2 (50 Ω Input Impedance)

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	100 mV/div		49.25 Ω to 50.75 Ω	
	500 mV/div			
CH2	100 mV/div			
	500 mV/div			

External Trigger Channel

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
EXT TRIG	1 M Ω		0.99 M Ω to 1.01 M Ω	

DC Gain Accuracy Test

Specification

DC Gain Accuracy	
Specification	$\pm 2\% \times \text{Full Scale}^{[1]}$

Note^[1]: Full Scale = 8 div \times Current Vertical Scale.

Test Connection Diagram



Figure 2-2 DC Gain Accuracy Test Connection Diagram

Test Procedures

1. DC gain accuracy test when the input impedance is 1 M Ω

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
- 2) Turn on Fluke 9500B and set its impedance to 1 M Ω .
- 3) Output a DC signal with +1.5 mV_{DC} voltage (Vout1) via Fluke 9500B.
- 4) Configure the oscilloscope:
 - a) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - b) Press **CH1** \rightarrow **Ratio** to set the probe attenuation ratio to "1X".
 - c) Press **CH1** \rightarrow **Input** to set the input impedance of CH1 to 1 M Ω .
 - d) Rotate **VERTICAL** **SCALE** to set the vertical scale to 500 μ V/div.
 - e) Rotate **HORIZONTAL** **SCALE** to set the horizontal time base to 10 μ s.
 - f) Press **VERTICAL** **POSITION** to set the vertical position to 0.
 - g) Press **Acquire** \rightarrow **Acquisition** and use \rightarrow to select "Average" acquisition mode; press **Averages** and use \rightarrow to set the number of averages to 32.
- 5) Press **MENU** \rightarrow **Vavg** at the left side of the screen of the oscilloscope to turn on the average measurement function. Read and record Vavg1.
- 6) Adjust Fluke 9500B to make it output a DC signal with -1.5 mV_{DC} voltage (Vout2).
- 7) Press **MENU** \rightarrow **Vavg** at the left side of the screen of the oscilloscope to turn on the average measurement function. Read and record Vavg2.
- 8) Calculate the relative error of this vertical scale: $|(Vavg1 - Vavg2) - (Vout1 - Vout2)| / \text{Full Scale} \times 100\%$.
- 9) Keep the other settings of the oscilloscope unchanged:
 - a) Set the vertical scale to 1 mV/div, 2 mV/div, 5 mV/div, 10 mV/div, 20 mV/div, 50 mV/div, 100 mV/div, 200 mV/div, 500 mV/div, 1 V/div, 2 V/div, 5 V/div and 10 V/div respectively.
 - b) Adjust the output voltage of Fluke 9500B to 3 \times the current vertical scale and -3 \times the current vertical scale respectively.
 - c) Repeat steps 3) to 7) and record the test results.
 - d) Calculate the relative error of each vertical scale: $|(Vavg1 - Vavg2) - (Vout1 -$

$V_{out2} | / Full Scale \times 100\%$.

- 10) Turn off CH1. Repeat the steps above to test the relative error of each scale of CH2 and record the test results.

2. DC gain accuracy test when the input impedance is 50 Ω

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
- 2) Set the input impedance of Fluke 9500B to 50 Ω .
- 3) Output a DC signal with +1.5 mV_{DC} voltage (V_{out1}) via Fluke 9500B.
- 4) Configure the oscilloscope:
 - a) Turn on CH1.
 - b) Set the probe attenuation ratio to "1X".
 - c) Set the input impedance of CH1 to 50 Ω .
 - d) Repeat d) to g) in step 4) in **DC gain accuracy test when the input impedance is 1 M Ω** .
- 5) Test the relative error of each scale of CH1 (except 2 V/div, 5 V/div and 10 V/div) according to steps 5) to 9) in **DC gain accuracy test when the input impedance is 1 M Ω** and record the test results.
- 6) Turn off CH1. Repeat the steps above to test the relative error of each scale of CH2 and record the test results.

Test Record Form

1 M Ω Input Impedance

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vavg1	Vavg2	Calculation Result ^[1]		
CH1	500 μ V/div				$\leq 2\%$	
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					
	2 V/div					
	5 V/div					
	10 V/div					
CH2	500 μ V/div					
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					
	2 V/div					
	5 V/div					
	10 V/div					

Note^[1]: The calculation formula is $|(V_{avg1} - V_{avg2}) - (V_{out1} - V_{out2})| / \text{Full Scale} \times 100\%$; wherein, V_{out1} and V_{out2} are $3 \times$ the current vertical scale and $-3 \times$ the current vertical scale respectively.

50 Ω Input Impedance

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vavg1	Vavg2	Calculation Result ^[1]		
CH1	500 μV/div				≤ 2%	
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					
CH2	500 μV/div					
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					

Note^[1]: The calculation formula is $|(V_{avg1} - V_{avg2}) - (V_{out1} - V_{out2})| / \text{Full Scale} \times 100\%$; wherein, V_{out1} and V_{out2} are $3 \times$ the current vertical scale and $-3 \times$ the current vertical scale respectively.

Bandwidth Test

The bandwidth test verifies the bandwidth performance of the oscilloscope by testing the amplitude loss of the oscilloscope under test at full bandwidth.

Specification

Bandwidth	
Amplitude Loss ^[1]	-3 dB to 1 dB

Note^[1]: Amplitude Loss (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$; wherein, V_{rms1} is the measurement result of amplitude effective value at 1MHz and V_{rms2} is the measurement result of amplitude effective value at full bandwidth.

Test Connection Diagram

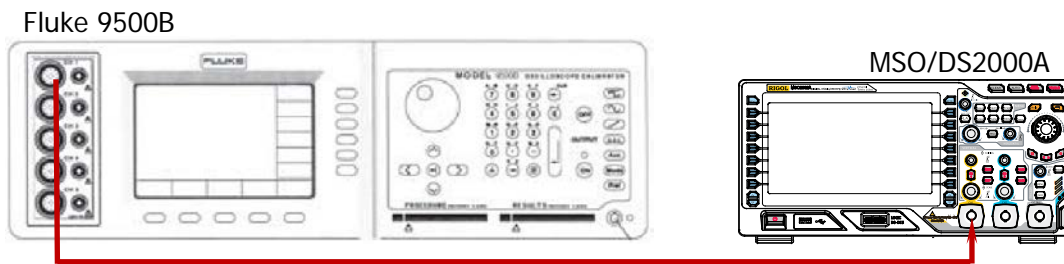


Figure 2-3 Bandwidth Test Connection Diagram

Test Procedures

1. Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
2. Turn on Fluke 9500B and set its impedance to 50 Ω .
3. Configure the oscilloscope:
 - 1) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - 2) Press **CH1** \rightarrow **Ratio** to set the probe attenuation ratio to "1X".
 - 3) Press **CH1** \rightarrow **Input** to set the input impedance of CH1 to 50 Ω .
 - 4) Rotate **HORIZONTAL** **SCALE** to set the horizontal time base to 500 ns.
 - 5) Rotate **VERTICAL** **SCALE** to set the vertical scale to 100 mV/div.
 - 6) Press **HORIZONTAL** **POSITION** and **VERTICAL** **POSITION** respectively to set the horizontal position and vertical position to 0.
 - 7) Press **TRIGGER** **LEVEL** to set the trigger level to 0 V.
4. Output a Sine with 1 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
5. Press **MENU** \rightarrow **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record V_{rms1} .
6. Output a Sine with 300 MHz frequency (the setting value is different for different model of oscilloscope under test; please refer to Table 2-2) and 600 mVpp amplitude via Fluke 9500B.

Table 2-2 Setting Value of the Oscilloscope under Test

Model	Full Bandwidth	Horizontal Time Base
MSO/DS2302A/2302A-S	300 MHz	2 ns
MSO/DS2202A/2202A-S	200 MHz	5 ns
MSO/DS2102A/2102A-S	100 MHz	5 ns
MSO/DS2072A/2072A-S	70 MHz	10 ns

7. Rotate **HORIZONTAL SCALE** to set the horizontal time base to 2 ns (the setting value is different for different model of oscilloscope under test; please refer to Table 2-2).
8. Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms2.
9. Calculate the amplitude loss: **Amplitude Loss (dB) = 20 × lg (Vrms2/Vrms1)**.
10. Keep the other settings of the oscilloscope in step 3 unchanged and set the vertical scale to 200 mV/div.
11. Output a Sine with 1 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
12. Repeat step 5.
13. Output a Sine with 300 MHz frequency (the setting value is different for different model of oscilloscope under test; please refer to Table 2-2) and 1.2 Vpp amplitude via Fluke 9500B.
14. Repeat steps 7 to 9.
15. Keep the other settings of the oscilloscope in step 3 unchanged and set the vertical scale to 500 mV/div.
16. Output a Sine with 1 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
17. Repeat step 5.
18. Output a Sine with 300 MHz frequency (the setting value is different for different model of oscilloscope under test; please refer to Table 2-2) and 3 Vpp amplitude via Fluke 9500B.
19. Repeat steps 7 to 9.
20. Turn off CH1. Repeat the steps above to test CH2 and record the test results.

Test Record Form

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vrms1	Vrms2	Amplitude Loss ^[1]		
CH1	100 mV/div				-3 dB to 1 dB	
	200 mV/div					
	500 mV/div					
CH2	100 mV/div					
	200 mV/div					
	500 mV/div					

Note ^[1]: Amplitude Loss (dB) = 20 × lg (Vrms2/Vrms1).

Bandwidth Limit Test

The bandwidth limit test verifies the 20 MHz bandwidth limit function and 100 MHz bandwidth limit function of the oscilloscope respectively by testing the amplitude losses of the oscilloscope under test at the bandwidth limits.

For different models of oscilloscopes, the bandwidth limits are different, as shown in the table below.

Table 2-3 Bandwidth Limits of the Oscilloscope under Test

Model	Bandwidth Limit
MSO/DS2302A/2302A-S/2202A/2202A-S	20 MHz/100 MHz
MSO/DS2102A/2102A-S/2072A/2072A-S	20 MHz

Specification

Bandwidth Limit	
Amplitude Loss ^[1]	-3 dB to 1 dB

Note^[1]: Amplitude Loss (dB) = $20 \times \lg(V_{rmsn}/V_{rms1})$. Wherein, V_{rmsn} represents V_{rms2} or V_{rms3} ; V_{rms1} is the measurement result of amplitude effective value at 1MHz; V_{rms2} is the measurement result of amplitude effective value at the bandwidth limit; V_{rms3} is the measurement result of amplitude effective value when the frequency is greater than the bandwidth limit.

Test Connection Diagram





Figure 2-4 Bandwidth Limit Test Connection Diagram








Test Procedures

1. 20 MHz bandwidth limit test

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
- 2) Turn on Fluke 9500B and set its impedance to 50 Ω.
- 3) Configure the oscilloscope:
 - a) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - b) Press **CH1** → **Ratio** to set the probe attenuation ratio to "1X".
 - c) Press **CH1** → **Input** to set the input impedance of CH1 to 50 Ω.
 - d) Rotate **VERTICAL** **SCALE** to set the vertical scale to 100 mV/div.
 - e) Rotate **HORIZONTAL** **SCALE** to set the horizontal time base to 200 ns.
 - f) Press **HORIZONTAL** **POSITION** and **VERTICAL** **POSITION** respectively to set the horizontal position and vertical position to 0.
 - g) Press **TRIGGER** **LEVEL** to set the trigger level to 0 V.
- 4) Press **CH1** → **BW Limit** and use **↺** to set the bandwidth limit to "20 M".

- 5) Output a Sine with 1 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
- 6) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms1.
- 7) Output a Sine with 20 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
- 8) Rotate **HORIZONTAL**  **SCALE** to set the horizontal time base to 20 ns.
- 9) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms2.
- 10) Calculate the amplitude loss: **Amplitude Loss (dB) = 20 × lg (Vrms2/Vrms1)** and compare the result with the specification. At this point, the amplitude loss should be within the specification range.
- 11) Output a Sine with 50 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
- 12) Rotate **HORIZONTAL**  **SCALE** to set the horizontal time base to 10 ns.
- 13) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms3.
- 14) Calculate the amplitude loss: **Amplitude Loss (dB) = 20 × lg (Vrms3/Vrms1)**. At this point, the amplitude loss should be lower than -3 dB.
- 15) Keep the other settings of the oscilloscope in step 3) unchanged and set the vertical scale to 200 mV/div.
- 16) Output a Sine with 1 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
- 17) Repeat step 6).
- 18) Output a Sine with 20 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
- 19) Repeat steps 8) to 10).
- 20) Output a Sine with 50 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
- 21) Repeat steps 12) to 14).
- 22) Keep the other settings of the oscilloscope in step 3) unchanged and set the vertical scale to 500 mV/div.
- 23) Output a Sine with 1 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
- 24) Repeat step 6).
- 25) Output a Sine with 20 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
- 26) Repeat steps 8) to 10).
- 27) Output a Sine with 50 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
- 28) Repeat steps 12) to 14).
- 29) Turn off CH1. Repeat the steps above to test CH2 and record the test results.

2. 100 MHz bandwidth limit test

- 1) Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in Figure 2-4.
- 2) Turn on Fluke 9500B and set its impedance to 50 Ω.
- 3) Configure the oscilloscope:
 - a) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - b) Press **CH1** → **Ratio** to set the probe attenuation ratio to "1X".
 - c) Press **CH1** → **Input** to set the input impedance of CH1 to 50 Ω.
 - d) Rotate **VERTICAL**  **SCALE** to set the vertical scale to 100 mV/div.
 - e) Rotate **HORIZONTAL**  **SCALE** to set the horizontal time base to 200 ns.
 - f) Press **HORIZONTAL**  **POSITION** and **VERTICAL**  **POSITION** respectively to set the horizontal position and vertical position to 0.
 - g) Press **TRIGGER**  **LEVEL** to set the trigger level to 0 V.
- 4) Press **CH1** → **BW Limit** and use  to set the bandwidth limit to "100 M".
- 5) Output a Sine with 1 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
- 6) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms1.
- 7) Output a Sine with 100 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
- 8) Rotate **HORIZONTAL**  **SCALE** to set the horizontal time base to 5 ns.
- 9) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the

- effective value measurement function. Read and record Vrms2.
- 10) Calculate the amplitude loss: **Amplitude Loss (dB) = 20 × lg (Vrms2/Vrms1)** and compare the result with the specification. At this point, the amplitude loss should be within the specification range.
 - 11) Output a Sine with 200 MHz frequency and 600 mVpp amplitude via Fluke 9500B.
 - 12) Rotate **HORIZONTAL**  **SCALE** to set the horizontal time base to 2 ns.
 - 13) Press **MENU** → **Vrms-N** at the left side of the screen of the oscilloscope to turn on the effective value measurement function. Read and record Vrms3.
 - 14) Calculate the amplitude loss: **Amplitude Loss (dB) = 20 × lg (Vrms3/Vrms1)**. At this point, the amplitude loss should be lower than -3 dB.
 - 15) Keep the other settings of the oscilloscope in step 3) unchanged and set the vertical scale to 200 mV/div.
 - 16) Output a Sine with 1 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
 - 17) Repeat step 6).
 - 18) Output a Sine with 100 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
 - 19) Repeat steps 8) to 10).
 - 20) Output a Sine with 200 MHz frequency and 1.2 Vpp amplitude via Fluke 9500B.
 - 21) Repeat steps 12) to 14).
 - 22) Keep the other settings of the oscilloscope in step 3) unchanged and set the vertical scale to 500 mV/div.
 - 23) Output a Sine with 1 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
 - 24) Repeat step 6).
 - 25) Output a Sine with 100 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
 - 26) Repeat steps 8) to 10).
 - 27) Output a Sine with 200 MHz frequency and 3 Vpp amplitude via Fluke 9500B.
 - 28) Repeat steps 12) to 14).
 - 29) Turn off CH1. Repeat the steps above to test CH2 and record the test results.

Test Record Form

20 MHz Bandwidth Limit Test

Channel	Vertical Scale	Test Result			Calculation Result	Limit	Pass/Fail
		Vrms1	Vrms2	Vrms3			
CH1	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
CH2	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	

Note^[1]: Amplitude Loss A1 (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$.

Note^[2]: Amplitude Loss A2 (dB) = $20 \times \lg(V_{rms3}/V_{rms1})$.

100 MHz Bandwidth Limit Test

Channel	Vertical Scale	Test Result			Calculation Result	Limit	Pass/Fail
		Vrms1	Vrms2	Vrms3			
CH1	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
CH2	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	

Note^[1]: Amplitude Loss A1 (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$.

Note^[2]: Amplitude Loss A2 (dB) = $20 \times \lg(V_{rms3}/V_{rms1})$.

Time Base Accuracy Test

Specification

Time Base Accuracy ^[1]	
Specification	$\leq \pm(25 \text{ ppm} + \text{Clock Drift}^{[2]} \times \text{Number of years that the instrument has been used}^{[3]})$

Note^[1]: Typical.

Note^[2]: Clock drift is lower than or equal to ± 5 ppm/year.

Note^[3]: For the number of years that the instrument has been used, please calculate according to the date in the verification certificate provided when the instrument leaves factory.

Test Connection Diagram

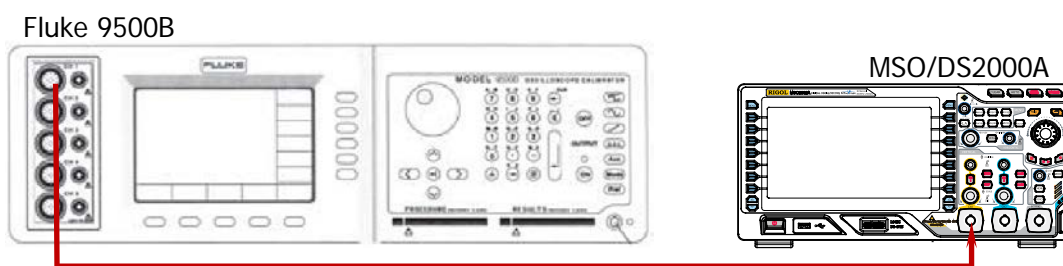


Figure 2-5 Time Base Accuracy Test Connection Diagram

Test Procedures

1. Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
2. Turn on Fluke 9500B and set its impedance to 50 Ω .
3. Output a Sine with 10 MHz frequency and 1 Vpp amplitude via Fluke 9500B.
4. Configure the oscilloscope:
 - 1) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - 2) Press **CH1** \rightarrow **Ratio** to set the probe attenuation ratio to "1X".
 - 3) Press **CH1** \rightarrow **Input** to set the input impedance of CH1 to 50 Ω .
 - 4) Rotate **VERTICAL** \rightarrow **SCALE** to set the vertical scale to 200 mV/div.
 - 5) Press **VERTICAL** \rightarrow **POSITION** to set the vertical position to 0.
 - 6) Rotate **HORIZONTAL** \rightarrow **SCALE** to set the horizontal time base to 10 ns.
 - 7) Rotate **HORIZONTAL** \rightarrow **POSITION** to set the horizontal position to 1 ms.
5. Observe the screen of the oscilloscope. Press **Cursor** \rightarrow **Mode** \rightarrow "Manual" to turn on the manual cursor function. Measure the offset (ΔT) of the middle point of the signal (namely the crossing point of the rising edge of the current signal and the trigger level line) relative to the screen center using manual cursor measurement and record the measurement result.
6. Calculate the time base accuracy; namely the ratio of ΔT to the horizontal position of the oscilloscope. For example, if the offset measured is 8 ns, the time base accuracy is 8 ns/1 ms=8 ppm.

7. Calculate the time base accuracy limit using the formula " $\pm(25 \text{ ppm} + 5 \text{ ppm/year} \times \text{Number of years that the instrument has been used})$ ".

Test Record Form


Channel	Test Result ΔT	Calculation Result ^[1]	Limit	Pass/Fail
CH1			$\pm(25 \text{ ppm} + 5 \text{ ppm/year} \times \text{Number of years that the instrument has been used}^{[2]})$	

Note^[1]: Calculation Result = Test Result $\Delta T/1 \text{ ms}$.

Note^[2]: For the number of years that the instrument has been used, please calculate according to the date in the verification certificate provided when the instrument leaves factory.

Zero Point Offset Test

Zero point offset is defined as the offset of the crossing point of the waveform and trigger level line relative to the trigger position, as shown in the figure below.

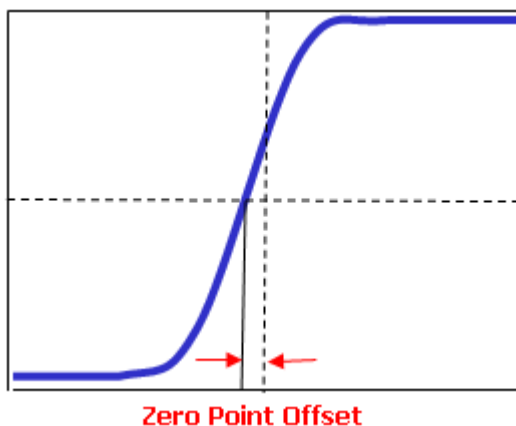

Specification

Zero Point Offset	
Specification	$\pm 0.5 \text{ div} \times \text{Minimum Time Base Scale}^{[1]}$

Note^[1]: For different models of oscilloscopes under test, the minimum time base scales are different. For MSO/DS2302A/2302A-S, the minimum time base scale is 1 ns/div; for MSO/DS2202A/2202A-S, the minimum time base scale is 2 ns/div; for MSO/DS2102A/2102A-S/2072A/2072A-S, the minimum time base scale is 5 ns/div.

Test Connection Diagram



Figure 2-6 Zero Point Offset Test Connection Diagram

Test Procedures

1. Connect the active signal terminal of Fluke 9500B to CH1 of the oscilloscope, as shown in the figure above.
2. Turn on Fluke 9500B and set its impedance to 50 Ω .
3. Output a fast edge signal with 150 ps rise time and 600 mVpp amplitude via Fluke 9500B.
4. Configure the oscilloscope:
 - (1) Press **CH1** in the vertical control area (VERTICAL) at the front panel to turn on CH1.
 - (2) Press **CH1** \rightarrow **Ratio** to set the probe attenuation ratio to "1X".

- (3) Press **CH1** → **Input** to set the input impedance of CH1 to 50 Ω.
- (4) Rotate **VERTICAL** **SCALE** to set the vertical scale to 100 mV/div.
- (5) Rotate **HORIZONTAL** **SCALE** to set the horizontal time base to 1 ns (the setting value is different for different model of oscilloscope under test; please refer to Table 2-4).

Table 2-4 Horizontal Time Base Setting Value for the Oscilloscope under Test

Model	Horizontal Time Base
MSO/DS2302A/2302A-S	1 ns/div
MSO/DS2202A/2202A-S	2 ns/div
MSO/DS2102A/2102A-S/2072A/2072A-S	5 ns/div

- (6) Press **TRIGGER** **LEVEL** to adjust the trigger level to the middle of the screen.
 - (7) Rotate **HORIZONTAL** **POSITION** and **VERTICAL** **POSITION** respectively to adjust the horizontal position and vertical position properly.
5. Observe the screen of the oscilloscope. Press **Cursor** → **Mode** → "Manual" to turn on the manual cursor function. Measure the zero point offset using manual cursor measurement and record the measurement result.
 6. Keep the other settings of the oscilloscope unchanged and set the vertical scale to 500 mV/div.
 7. Output a fast edge signal with 150 ps rise time and 3 V amplitude via Fluke 9500B.
 8. Measure the zero point offset according to the method above and record the measurement result.
 9. Turn off CH1. Repeat the steps above to test CH2 and record the test results.

Test Record Form

Channel	Fast Edge Signal Amplitude	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	600 mV	100 mV/div		≤ 0.5 div × Minimum Time Base Scale ^[1]	
	3 V	500 mV/div			
CH2	600 mV	100 mV/div			
	3 V	500 mV/div			

Note^[1]: For different models of oscilloscopes under test, the minimum time base scales are different. For MSO/DS2302A/2302A-S, the minimum time base scale is 1 ns/div; for MSO/DS2202A/2202A-S, the minimum time base scale is 2 ns/div; for MSO/DS2102A/2102A-S/2072A/2072A-S, the minimum time base scale is 5 ns/div.

Appendix Test Record Form

RIGOL MSO2000A/DS2000A Series Digital Oscilloscope
Performance Verification Test Record Form

Model: _____ Tested by: _____ Test Date: _____

Impedance Test

CH1 and CH2 (1 M Ω Input Impedance)

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	100 mV/div		0.99 M Ω to 1.01 M Ω	
	500 mV/div			
CH2	100 mV/div			
	500 mV/div			

CH1 and CH2 (50 Ω Input Impedance)

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	100 mV/div		49.25 Ω to 50.75 Ω	
	500 mV/div			
CH2	100 mV/div			
	500 mV/div			

External Trigger Channel

Channel	Vertical Scale	Test Result	Limit	Pass/Fail
EXT TRIG	1 M Ω		0.99 M Ω to 1.01 M Ω	

DC Gain Accuracy Test

1 MΩ Input Impedance

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vavg1	Vavg2	Calculation Result ^[1]		
CH1	500 μV/div				≤ 2%	
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					
	2 V/div					
	5 V/div					
	10 V/div					
CH2	500 μV/div					
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
	1 V/div					
	2 V/div					
	5 V/div					
	10 V/div					

Note^[1]: The calculation formula is $|(V_{avg1} - V_{avg2}) - (V_{out1} - V_{out2})| / \text{Full Scale} \times 100\%$; wherein, V_{out1} and V_{out2} are $3 \times$ the current vertical scale and $-3 \times$ the current vertical scale respectively.

50 Ω Input Impedance

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vavg1	Vavg2	Calculation Result ^[1]		
CH1	500 μ V/div				$\leq 2\%$	
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
1 V/div						
CH2	500 μ V/div					
	1 mV/div					
	2 mV/div					
	5 mV/div					
	10 mV/div					
	20 mV/div					
	50 mV/div					
	100 mV/div					
	200 mV/div					
	500 mV/div					
1 V/div						

Note^[1]: The calculation formula is $|(V_{avg1} - V_{avg2}) - (V_{out1} - V_{out2})| / \text{Full Scale} \times 100\%$; wherein, V_{out1} and V_{out2} are $3 \times$ the current vertical scale and $-3 \times$ the current vertical scale respectively.

Bandwidth Test

Channel	Vertical Scale	Test Result			Limit	Pass/Fail
		Vrms1	Vrms2	Amplitude Loss ^[1]		
CH1	100 mV/div				-3 dB to 1 dB	
	200 mV/div					
	500 mV/div					
CH2	100 mV/div					
	200 mV/div					
	500 mV/div					

Note^[1]: Amplitude Loss (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$.

Bandwidth Limit Test

20 MHz Bandwidth Limit Test

Channel	Vertical Scale	Test Result			Calculation Result	Limit	Pass/Fail
		Vrms1	Vrms2	Vrms3			
CH1	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
CH2	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	

Note^[1]: Amplitude Loss A1 (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$.

Note^[2]: Amplitude Loss A2 (dB) = $20 \times \lg(V_{rms3}/V_{rms1})$.

100 MHz Bandwidth Limit Test

Channel	Vertical Scale	Test Result			Calculation Result	Limit	Pass/Fail
		Vrms1	Vrms2	Vrms3			
CH1	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
CH2	100 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	200 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	
	500 mV/div				Amplitude Loss A1 ^[1]	-3 dB to 1 dB	
					Amplitude Loss A2 ^[2]	≤-3 dB	

Note^[1]: Amplitude Loss A1 (dB) = $20 \times \lg(V_{rms2}/V_{rms1})$.

Note^[2]: Amplitude Loss A2 (dB) = $20 \times \lg(V_{rms3}/V_{rms1})$.

Time Base Accuracy Test

Channel	Test Result ΔT	Calculation Result ^[1]	Limit	Pass/Fail
CH1			$\pm(25 \text{ ppm} + 5 \text{ ppm/year} \times \text{Number of years that the instrument has been used}^{[2]})$	

Note^[1]: Calculation Result = Test Result ΔT /1 ms.

Note^[2]: For the number of years that the instrument has been used, please calculate according to the date in the verification certificate provided when the instrument leaves factory.

Zero Point Offset Test

Channel	Fast Edge Signal Amplitude	Vertical Scale	Test Result	Limit	Pass/Fail
CH1	600 mV	100 mV/div		$\leq 0.5 \text{ div} \times \text{Minimum Time Base Scale}^{[1]}$	
	3 V	500 mV/div			
CH2	600 mV	100 mV/div			
	3 V	500 mV/div			

Note^[1]: For different models of oscilloscopes under test, the minimum time base scales are different. For MSO/DS2302A/2302A-S, the minimum time base scale is 1 ns/div; for MSO/DS2202A/2202A-S, the minimum time base scale is 2 ns/div; for MSO/DS2102A/2102A-S/2072A/2072A-S, the minimum time base scale is 5 ns/div.