

Units Parts



4X 30mm screws



16 x 15mm screws



4x Legs



4x Leg Brackets



2x Plinth Clips



8x Cover stickers

Tools Required



Drill



Mallet



Screwdriver



Clamp



Spirit Level



Tape Measure

Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damages. Any un-needed cardboard or plastic should be flattened down and placed in the bin.


A minimum of two people will be needed to lift the unit.

Please note that the shelves are fixed and cannot be removed.

Unpacking the fittings

Remove all content from the packaging and ensure to familiarise yourself with all unit fittings.


All fittings should be kept on a clean and level surface.

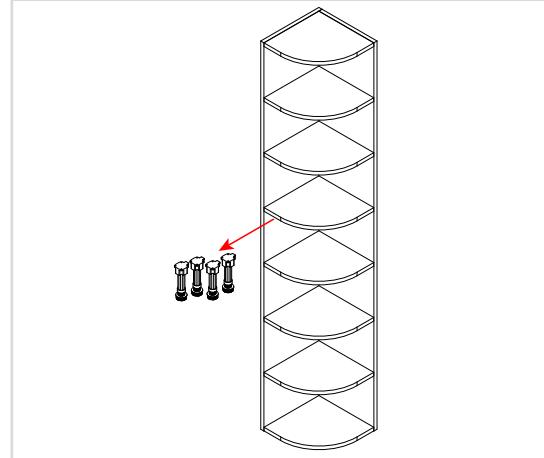

Positioning the leg brackets


Locate the leg brackets and position, as shown in the diagram. Ensure the leg brackets are rotated so the flange covers the outer edge, as this provides support for the edge of the unit.

The legs should be **45mm** in from the front edge. The leg on the curved edge should be measured from the centre of the curve.

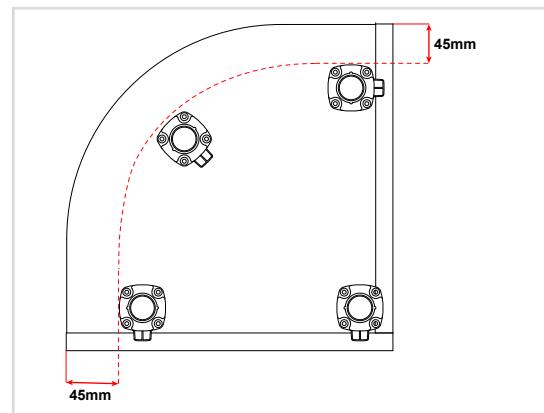

Fixing the leg bases


Secure each of the leg brackets into place with **4x15mm** screws per bracket.

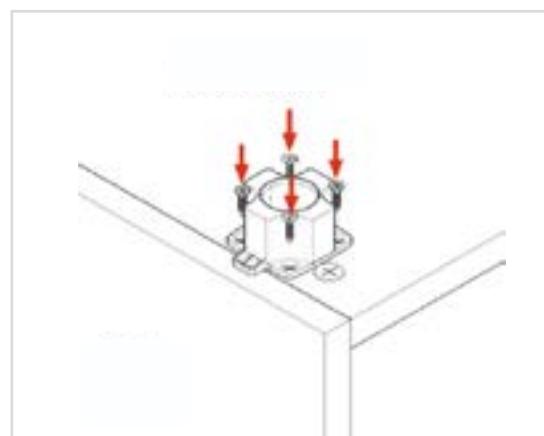

Inserting the legs

Push each leg firmly down into the leg bracket. Adjusting each leg to **165mm**.

Adjust the legs to the correct height by turning clockwise or anti-clockwise.

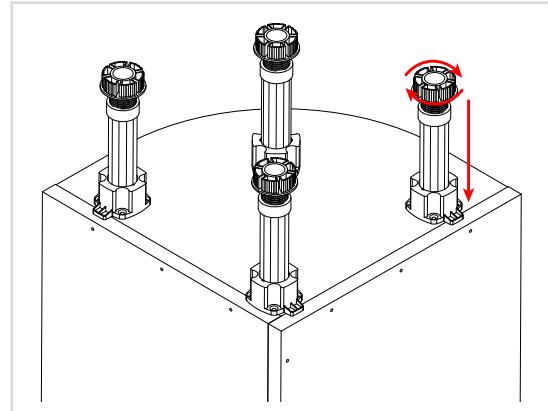


Lifting the unit into place

When lifting the unit into place do not tilt as this can damage the legs.

Place the unit against the wall and align it with the wall markings that will have been drawn during the room preparation stage.

Use a spirit level to ensure the unit is level from front to back, left to right, and diagonally. Adjust the legs if required.

The leg height can be adjusted by turning the foot of the leg clockwise or anti-clockwise.

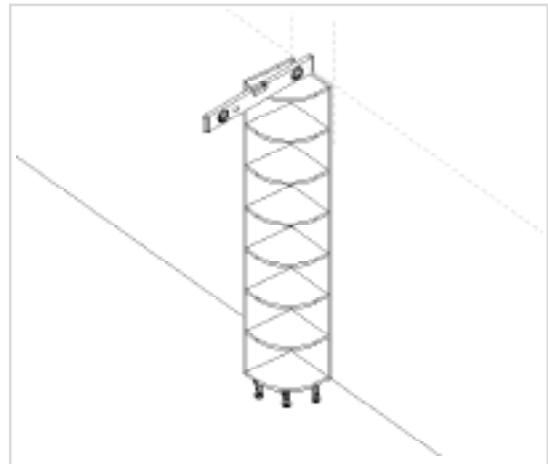


Securing to adjacent units

Clamp together the two units, checking the front edges are level and flush.

Using the screws provided and securing the unit from inside the adjacent unit, **1x30mm** screw should be fixed along side the shelf pegs at the top and bottom on both sides of the unit going into the curved unit.

Screws may also be secured behind the hinge plates to conceal the screws.

When installing a tower unit, secure the feature unit via the adjacent wall unit, in addition to the base unit.

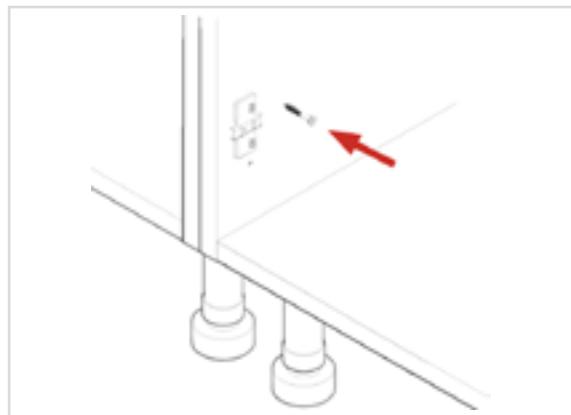

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.



**Store the plinth clips and the remaining 15mm screws.
These will be used later when attaching the plinth.**