



Always check the website for the most updated specifications: www.americh.com

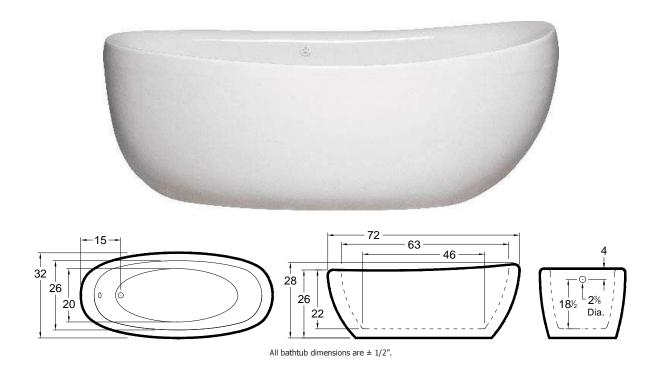

Airbath System II



LEGEND:



BLOWER



ON/OFF CONTROL

ACCESS PANEL (PROVIDED BY FACTORY)

STANDARD EQUIPMENT:

Integral Waste & Overflow with Polished Chrome trim
 Available with polished brass, polished nickel, satin
 nickel or oil rubbed bronze trim at no additional charge
 if specified at the time of order. Requests after order is
 shipped are subject to a \$75 list charge for trim

Lift bag is provided

INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Access panel for Airbath® systems included with the Contura series.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations as installations will vary.

DIMENSIONS:

72" x 32" x 28" (1829 x 813 x 711 mm) Gallon to Overflow = 80 (Liters = 303) Factory installed integral drain.

MATERIAL: Acrylic (White and Biscuit Only)

TUB FLOOR: Non-Textured

UNDERMOUNT: No

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

OPTIONAL ACCESSORIES

- Chromatherapy
- Linear Overflow
- Remote Control Upgrade

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- Canadian Standards Association (CSA)
- ANSI Z124.1 ANSI A112-19.7 ANSI A112.19.8

Contact Americh for additional approvals.