



Always check the website for the most updated specifications: www.americh.com




Tub pictured with optional waste & overflow.

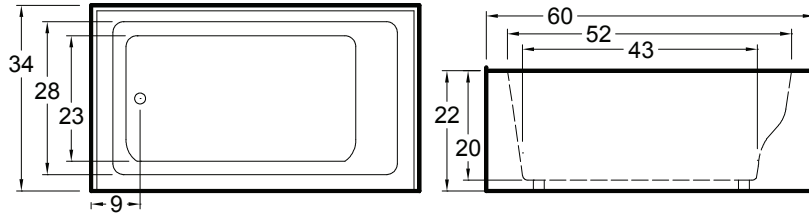


All bathtub dimensions are ± 1/2".


Builder Series



Luxury Series




Platinum Series




Combination

(pump and blower location only)




Airbath System II



Airbath System III

N/A

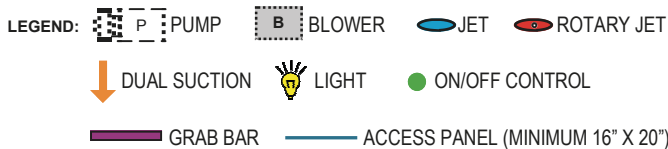

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.

LIST PRICE

With Airbath

Tub Only/Soaker	\$1,500	\$3,300
Builder Series	\$2,300	\$4,100
Luxury Series	\$2,900	\$4,700
Platinum Series	\$5,500	\$7,300

(FOB: N. Hollywood, CA or Charlotte, NC)

DIMENSIONS

60" x 34" x 22" (1524 x 864 x 559 mm)

Whirlpool Operating Gallons = 45 (Liters = 171)

Gallon to Overflow = 72 (Liters = 273)

MATERIAL: Acrylic

TUB FLOOR: NON-Textured

UNDERMOUNT: No

AVAILABLE COLORS: White and Biscuit

STANDARD EQUIPMENT:

- Apron
- Molded Tile Flange

OPTIONAL ACCESSORIES

- Chromotherapy*
- Grab Bars: 9" * - 14" - 16"
- High Density Insulation*
- Inline Heater
- Jets: Additional or Rotary*
- Pillows: 13"
- Quiet Pump with Built-in Heater Upgrade*
- Remote Control Upgrade (Select Series Only)
- Trim Kit Upgrade*
- Waste & Overflow*

*Standard on Platinum Series

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7 • ANSI A112.19.8

Contact Americh for additional approvals.