


E4-VL-23

Three Steel 2-3 Shift Valves



Replacement 2-3 Shift valve for Casting code F6 or F8 E4OD and 4R100 valve bodies. Fixes repeated stuck 2-3 shift valve that causes no 3rd or 4th but reverse is OK.




Fits Valve bodies with 2 or 3 SMALL balls located in this area.



Mr. Shift

©TransGo 2023

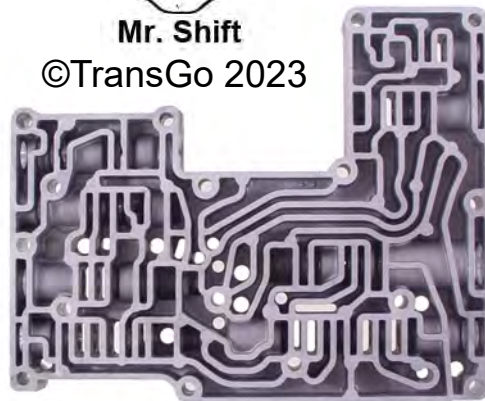

Remove old 2-3 valve and spring. Re-use retainer. Install New TransGo® Valve and Blue Spring.



Stroke new valve in bore until free.



08-21-2023