

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

The StatLink® 8 Zone Wired Module is complete with all the main electrical connections for a hydronic floor heating system. This module can be mounted either on a DIN rail or directly to a wall. It connects room thermostats to their corresponding actuators.

Features:

- Can be used with NO or NC thermal actuators.
- Terminals for four actuators per zone.
- Pump dry contact 3 min on/off delay.
- Boiler dry contact 3 min on delay and 0 or 15 min off delay.
- Plug-in connections.
- LED status indication.
- Strain relief fittings.

The 8 zone wired module has a current rating of 2A; a 60VA transformer allows for 20 actuators per module to be connected with up to 4 actuators per zone.



Includes 13 ¾" (35 cm) DIN rail and mounting screws.

Qty	Stk. #	Weight
	40318	1.6 lb (0.72 kg)

Technical Data

	Specifications
Controls	Reset (pinhole button)
Indicators	8× Zone LED Boiler enable LED Pump enable LED Power LED
Configuration Switches	NC / NO Actuators 0 / 15 min boiler off delay
Operating Conditions	32 – 104°F (0 – 40°C) 10 – 90% RH, non condensing
Storage Conditions	-14 – 104°F (-10 – 40°C) 10 – 90% RH, non condensing
Power	24 Vac~, 60Hz
Fuse	4 A 5×20mm F4AH250VP
Total Load Max.	24 Vac~, 2 A
Pump Load Max.	24V~, ⅓ HP
Boiler Load Max.	24V~, 3A (resistive)

Dimensions

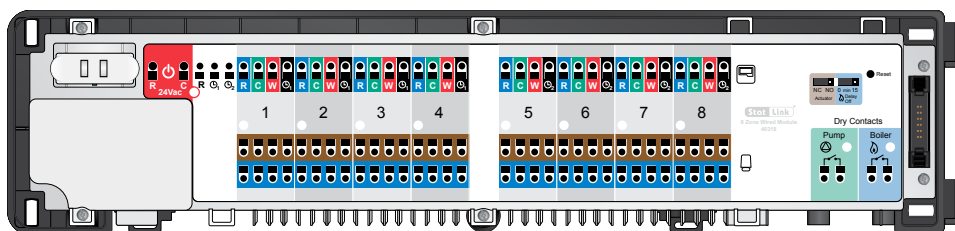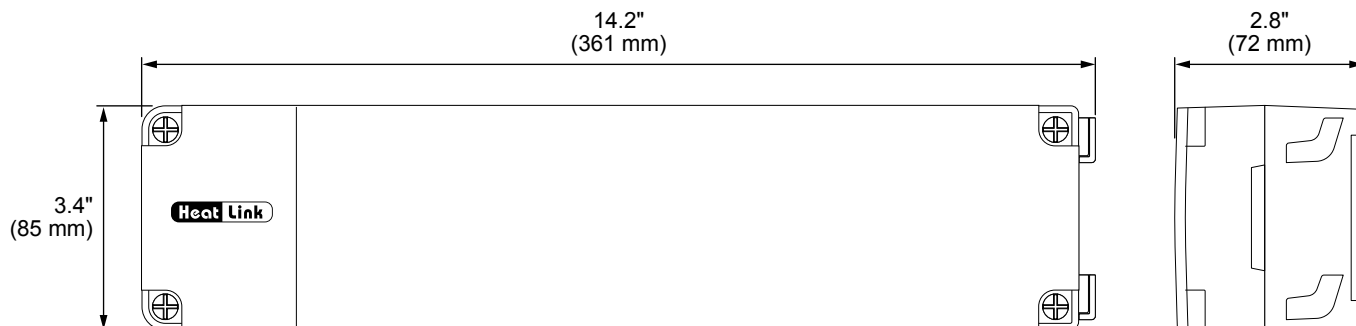

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

Related Documents

- Wired System Installation & Setup Manual (L3710)
- StatLink 8 Zone Wired Module Instructions (L640318)
- HeatLink Limited Heating Warranty