

SN-4100A

Affordable Easy to Use
VGA and Stereo Audio Switcher

FSR

Video Products Group

SN-4100A



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Available with
and without
Stereo Audio



FEATURES:

- Affordable
- Ultra High Bandwidth
- Easy to Use
- With and Without Stereo Audio

The SN-4100 series switcher is a 4 input to 1 output high resolution VGA switcher. The 'A' models include balanced stereo audio switching with audio following video.

The SN-4100 is ideally suited for stand alone use or as an upstream switcher for a stand alone scaler such as the FSR MAS-3100 or a scaling switcher such as the FSR Compass, Compass S2 or Omni Navigator. The SN-4100 could also be used to route 4 high resolution signals to a down converter such as the FSR MDC-MK1.

At 1 RU in height, and 1/2 rack wide, the SN-4100 is easy to install and does not require an excessive amount of space. All connections are on the back of the unit using HD-15's for VGA and 5 position plug-gable Phoenix connectors for stereo balanced audio.


Control of the SN-4100 is available on the front panel through 4, large, easy to see push buttons with an LED that illuminates for the selected input. The SN-4100 also provides a contact closure interface, with lamp feedback, for remote control or to interface to an AMX or Crestron system.

As with all FSR products, the SN-4100 includes all of the necessary accessories for use and installation. The SN-4100 ships with a power supply, manual and a full width rack mount kit with removable blank.

APPLICATIONS:

- Classrooms
- Boardrooms
- Houses of Worship
- Rental and Staging

SN-4100A System Diagram

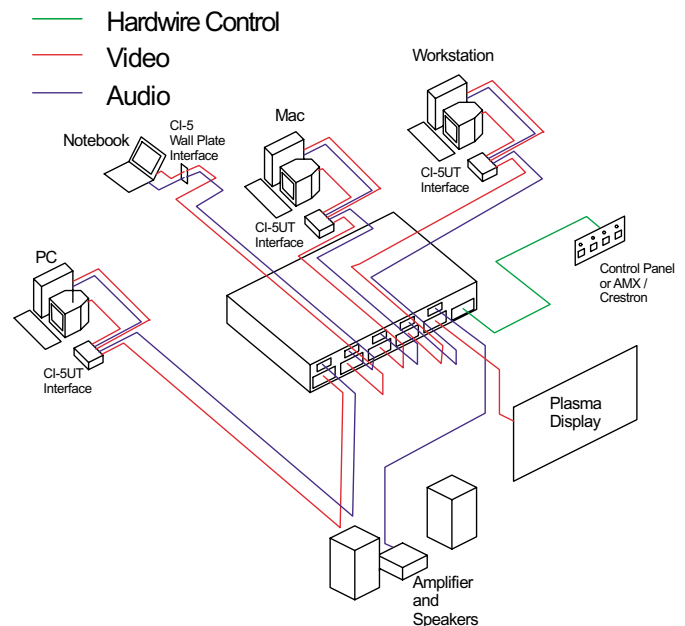

FSR Inc.

244 Bergen Boulevard, West Paterson, NJ 07424
Phone: 973.785.4347 · Fax: 973.785.4207
Order Desk: 1-800-332-FSR1
Web: www.fsrinc.com · E-mail: sales@fsrinc.com

TECHNICAL SPECIFICATIONS

AUDIO

Bandwidth: 20 Hz to 20 kHz (+/- 0.1dB)
THD + Noise: 0.03% @ 20 kHz at rated Max Output S/N > 98 dB
Noise floor: < 90 dBm
Stereo separation: -85 dB @ 1kHz
Gain: 6dB

AUDIO INPUTS

Number / type: 4 stereo balanced (may be used with unbalanced sources)
Connectors: 5 Position pluggable screw terminal
Impedance: 20Kohms balanced
Max level: +6 dBm

AUDIO OUTPUT

Number / type: 1 Balanced Stereo
Connector: 5 Position pluggable screw terminal
Impedance: 50 ohms
Maximum Level: 600 ohms: +12 dBm Balanced / +6 dBm Unbalanced
Hi - Z : +14 dBm Balanced / +8 dBm Unbalanced

VIDEO INPUTS

Type: HD-15 Female (x4) standard VGA style
Impedance: 75 ohms
Level: 1 volt p-p nominal, +/-1.5 volt max
VSWR: <1.2 @ 200 MHz typical
Isolation: -40 dB @ 350 MHz typical off channel isolation

VIDEO OUTPUT

Type: HD-15 Female (x1) standard VGA style
Impedance: 75 ohms
Gain: unity into 75 ohm load
Offset: 15 mV max
Bandwidth: 350 MHz
Flatness: 0.25 dB to 250MHz
VSWR: <1.2 @ 190 MHz

CONTROL I/O

Type: "Hardwire" via contact closure and lamp feedback
Connector: DB-9 Female (no RS-232 serial port)
Switch input: Normally open momentary inputs
Lamp Tally Output: 5 VDC @ 15 MA. Current limited LED outputs (latched)

POWER REQUIREMENTS

9 volts @ 400 mA (AC or DC).
A 9 VAC @ 1 AMP power adapter is included with two pin Molex disconnect.

SYNC INPUTS

Impedance: 470 ohms
Type: TTL high noise immunity
Level: 1.9 volt minimum

SYNC OUTPUT

Impedance: 75 Ohm
Level: 5 volts into Hi-Z, 2.4 Volts into 75 ohm load
Rise / Fall
Time: 0.8 nS
Propagation
Delay: 17nS

MOUNTING

Standard 19" Rack Mount Kit included

DB-9 Control I/O Pinout

PIN	FUNCTION
1	SWITCH 1 INPUT
2	SWITCH 3 INPUT
3	LAMP 1 OUTPUT
4	LAMP 3 OUTPUT
5	GROUND
6	SWITCH 2 INPUT
7	SWITCH 4 INPUT
8	LAMP 2 OUTPUT
9	LAMP 4 OUTPUT

FSR Inc.

244 Bergen Boulevard, West Paterson, NJ 07424
Phone: 973.785.4347 · Fax: 973.785.4207 · Order Desk: 1-800-332-FSR1
Web: www.fsrinc.com · E-mail: sales@fsrinc.com

Specifications are subject to change without notice