

GDB-03 Demo Module

USER MANUAL

GW INSTEK PART NO. 82DB-03000EA1



ISO-9001 CERTIFIED MANUFACTURER

GW INSTEK

This manual contains proprietary information, which is protected by copyright. All rights are reserved. No part of this manual may be photocopied, reproduced or translated to another language without prior written consent of Good Will company.

The information in this manual was correct at the time of printing. However, Good Will continues to improve products and reserves the rights to change specification, equipment, and maintenance procedures at any time without notice.

Good Will Instrument Co., Ltd.
No. 7-1, Jhongsing Rd., Tucheng Dist., New Taipei City 236, Taiwan

Table of Contents

GETTING STARTED	2
GDS-3000 Series Overview.....	2
GDS-2000A Series Overview.....	4
Demonstration type	5
DEMO BOARD OVERVIEW	7
Appearance	7
Specifications	8
GDS-3000	9
Demonstration setup	9
Software installation	14
Display demo board signal.....	16
GDS-2000A	48
Demonstration setup	48
Software installation	53
Display demo board signal.....	55
APPENDIX	91
Upgrading the GDS-3000/GDS-2000A Firmware.....	91
Upgrading the GDB-03 Demo Board Firmware.....	95

G GETTING STARTED

Using the demo board specially designed for GDS-2000A and GDS-3000, you can verify and observe various advanced functionalities for demonstration or your own education. For viewing demo waveforms on the GDS-3000, please refer to page 9 through page 47. For viewing demo waveforms on the GDS-2000A, please refer to page 48 through page 90.

GDS-3000 Series Overview


Series lineup

The GDS-3000 series consists of 6 models, divided into 2-channel and 4-channel versions.


Model name	Frequency bandwidth	Input channels	Real-time Sampling Rate
GDS-3152	150MHz	2	2.5GSa/s
GDS-3252	250MHz	2	2.5GSa/s
GDS-3352	350MHz	2	5GSa/s
GDS-3502	500MHz	2	4GSa/s
GDS-3154	150MHz	4	5GSa/s
GDS-3254	250MHz	4	5GSa/s
GDS-3354	350MHz	4	5GSa/s
GDS-3504	500MHz	4	4GSa/s

The 2 channel and 4 channel models differ in the position of the horizontal controls, the math, reference and bus keys as well as the position of the EXT trigger.

2-Channel model

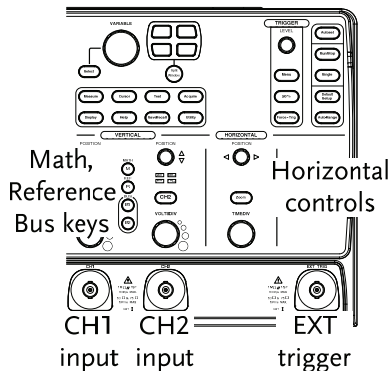

4-Channel model

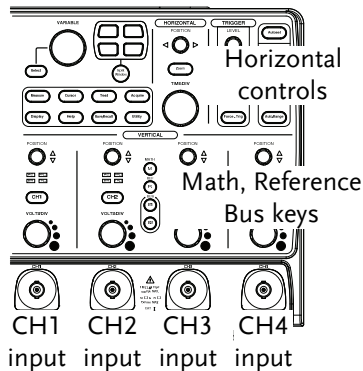


GDS-2000A Series Overview

Series lineup

The GDS-2000A series consists of 8 models, divided into 2-channel and 4-channel versions.


Model name	Frequency bandwidth	Input channels	Real-time Sampling Rate
GDS-2072A	70MHz	2	2GSa/s
GDS-2102A	100MHz	2	2GSa/s
GDS-2202A	200MHz	2	2GSa/s
GDS-2302A	300MHz	2	2GSa/s
GDS-2074A	70MHz	4	2GSa/s
GDS-2104A	100MHz	4	2GSa/s
GDS-2204A	200MHz	4	2GSa/s
GDS-2304A	300MHz	4	2GSa/s

2-Channel model



CH1~CH2 input

4-Channel model



CH1~CH4 input

Required tools

- GDS-3000 x 1 or GDS-2000A x 1
- Demo board x 1
- USB type A- type B cable x 1. Used for demo board's power
- Deep memory: 25k points record length(For GDS-3000)
- Deep memory: 2M points record length(For GDS-2000A)
- Standard oscilloscope probe x 4
- DS2-08LA or DS2-16LA(For GDS-2000A only)

Demonstration type

GDS-3000

- VPO (page16)
- Split window 1 (page 18)
- Split window 2 (page 19)
- Auto Range Function (page 21)
- Autoset mode (page 22)
- XY mode (page 25)
- Gating Measurement (page 27)
- Pulse Runt (page 28)
- Rise Fall (page 30)
- Pulse Width (page 31)
- UART (page 33)
- I²C (page 35)
- SPI (page 36)
- Delay(page 38)
- FM (page 40)
- Video (page 42)

GDS-2000A

- Autoset mode (page 55)
- XY mode (page 57)
- Gating Measurement (page 59)
- Pulse Runt (page 60)
- Rise Fall (page 62)
- Search (page 63)
- Segments (page 65)
- Parallel (page 66)
- Pulse Width (page 68)
- Delay (page 70)
- LM(Long Memory)(page 72)
- Logic (page 74)
- UART (page 75)
- I²C (page 77)
- SPI (page 78)
- CAN(page 80)


- Generator (page 44)
- LIN(page 81)
- FM (page 82)
- Video (page 85)
- Generator (page 87)

DEMO BOARD

OVERVIEW

The demo board is a signal generator board capable of producing waveforms which represent various real life scenarios you might encounter. You can use the board as a training kit to learn how to properly view signals, or use it as a generic signal generator.

Appearance

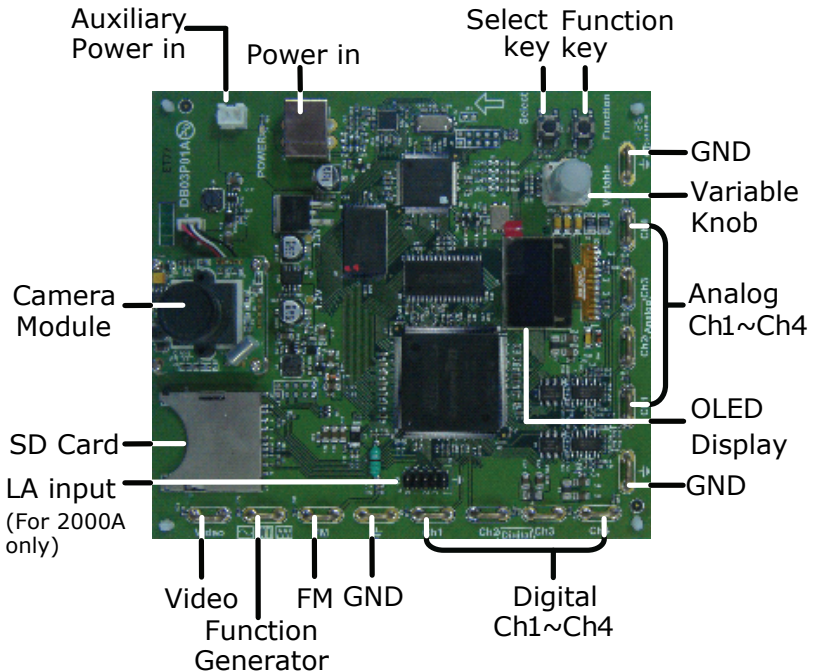


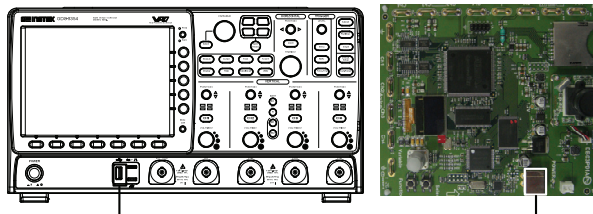
Specifications

Signal output	<ul style="list-style-type: none"> • 5 types for digital analyzer, 9 types for analog analyzer(For GDS-3000) • 7 types for digital analyzer, 8 types for analog analyzer(For GDS-2000A) • FM signal • Sin / Square / Triangle Signal • Video signal 	
Power supply	5V DC, USB or auxiliary power input	
Accessory	USB cable type A - type B x 1	
Dimensions	13(W)x14.5(H)	
Display system	Display Mode	Passive Matrix
	Display Resolution	128x64
	Display Color	White
	Module Size	26.4x28.5x1.26 mm
	Panel Size	26.4x19.7x1.26 mm
Camera module	PCB size	32x32 mm
	CCD sensor	1/4" VGA Progressive Color CMOS Sensor
	Video analog Output	720x480I(NTSC) / 720x576I(PAL)

GDS-3000


Demonstration setup

Step	1. Turn on the GDS-3000.	<p>POWER</p> 
	2. Install the Demo module software. Please refer to the chapter “SOFTWARE INSTALLATION” on page 14 for details.	
Note	A. Please make sure that the firmware version is V1.14 or above for models with a bandwidth of less than or equal to 350MHz. B. Please make sure that the firmware version is V1.0 or above for the model with 500MHz. C. Please refer to the “Appendix” chapter for information about updating the firmware. 3. Connect the USB cable as shown in the following diagram to power up the demo board. Connect the Type A plug to the GDS-3000 and the Type B plug to the demo board.	




Note Make sure the power LED on the demo board turns on.

4. Select x10 as the attenuation on the probe to limit the input signal amplitude if the probe you are using is selectable from x1 and x10.




5. Depending on the type of waveform you want to display, connect the probes to the terminals marked, Analog CH1~CH4, Digital CH1~CH4, Video, FM as shown in the diagrams below. Connect the grounding clips to ground terminal (\perp).


For displaying analog waveform

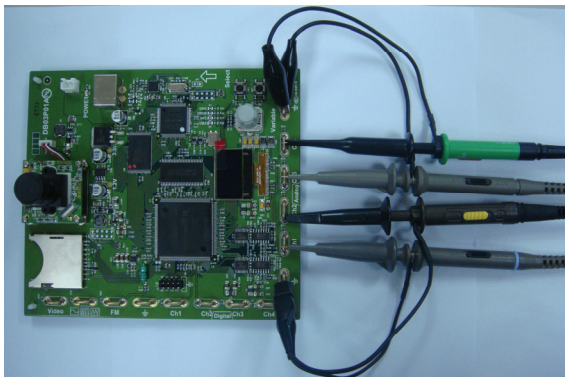


For displaying digital waveform

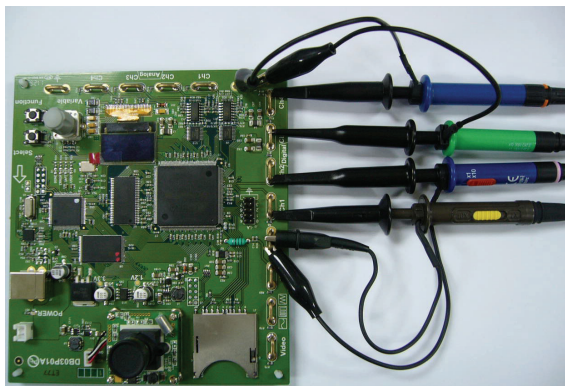

For displaying FM waveform

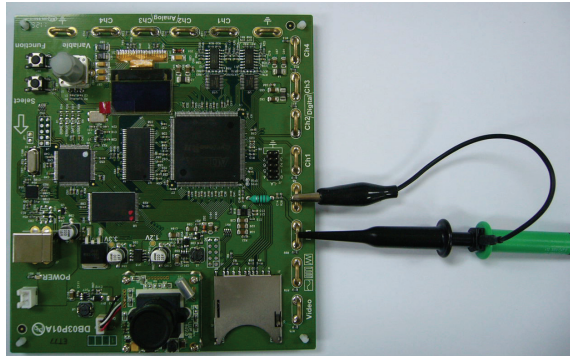

For displaying video waveform

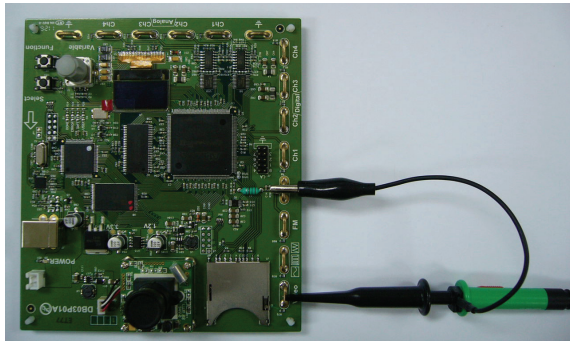

6. Connect the other end of the probe(s) to the corresponding CH1 to CH4 terminals on the GDS-3000.

7. Adjust the *Variable* knob on the demo board to select which oscilloscope to demonstrate when the USB cable is connected to the demo board and the oscilloscope. The GDS-3000 is selected when it is highlighted on the OLED display.



Software installation

Step 1. Insert the USB memory stick with GDB03DemoMode.gz into the USB port on the front panel of the GDS-3000.

Note GDB03DemoMode.gz comes from the GDB03DemoMode.zip file. When you unzip the zip file, two files are generated. One is GDB03DemoMode.gz for the software installation and the other is this user manual in PDF format.



2. Press the *Utility* key.





3. Select *File Utilities* from the bottom menu.



4. Use the Variable knob to select the USB memory stick and then press the Select button.

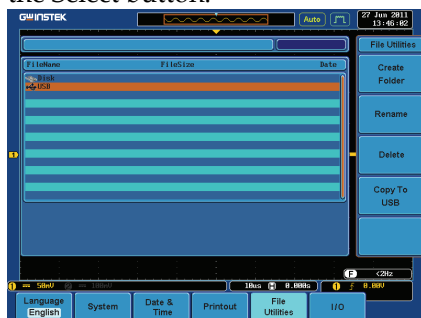

- Use the Variable knob to select GDB03DemoMode.gz file and then press the Select button to select it.

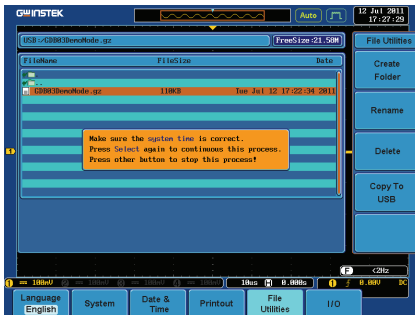

- Press the Select button again to start installation.



- The installation is complete when a message showing "Please turn off the oscilloscope and turn on again" is displayed.


Display demo board signal

The demo board can be used to display 9 types of analog signals, 5 types of digital signals, FM and video signals. Please follow the procedure listed below to display each signal in sequence.

Display VPO (Analog Mode 1)

Background The oscilloscope can be used to clearly observe and analyze intermittent events by adjusting the intensity and persistence of waveforms.



- Step**
1. Connect the probes to the terminals marked Analog CH1~CH4, and connect the grounding clips to ground terminal (\perp).
 2. Connect the probes to corresponding CH1~CH4 terminals on the GDS-3000.
 3. Press the *Test* key on the front panel of the GDS-3000.
 4. Press the *Demo* button.
 5. Press the *Down* button to select Analog Mode 1. A screen confirming that Analog Mode 1 is selected appears, as shown on the next page.



Note If the Analog Mode is not selected, press the F1 button on the side menu. Use the *Variable* knob to select Analog Mode. Press the *Select* button to confirm Analog Mode 1 is selected. (Refer to Page 32 step 5)





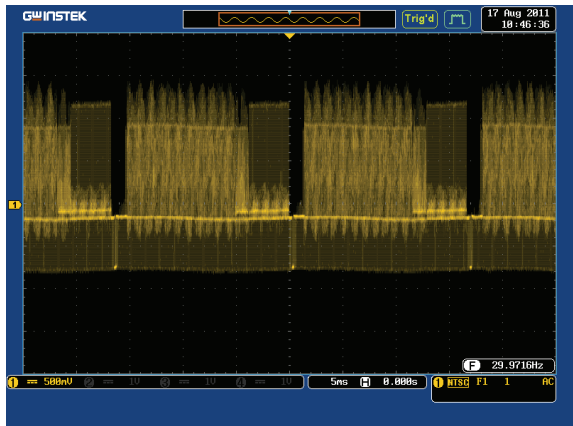


6. Press the *Run* button to display the waveform.





Display Split windows 1 (Analog Mode 2)

Background Display 4 unsynchronized waveforms at different frequencies in different separate split windows with different trigger settings

- | | | |
|-------------|--|--|
| Step | <ol style="list-style-type: none"> 1. Press the <i>Test</i> key on the front panel of the GDS-3000. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Down</i> button to select Analog Mode 2. A screen confirming Analog Mode 2 is selected as shown below appears. | 
 |

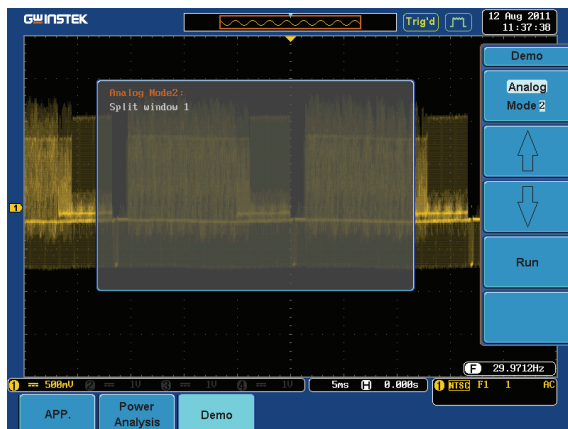



- | | |
|---|---|
| <ol style="list-style-type: none"> 4. Press the <i>Run</i> button to display the waveforms in split windows as shown on the next page. |  |
|---|---|

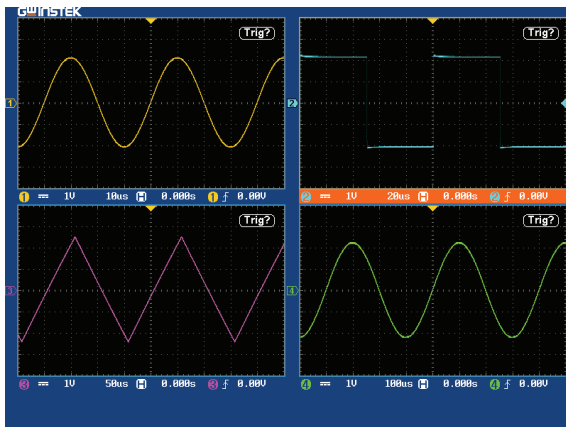


Display Split windows 2 (Analog Mode 3)



Background Display a signal (a more complex signal) that can have different settings and be displayed in four split windows.

- Step**
1. Press the *Test* key on the front panel of the GDS-3000.
 2. Press the *Demo* button.
 3. Press the *Down* button to select Analog Mode 3. A screen confirming Analog Mode 3 is selected as shown on the next page appears.



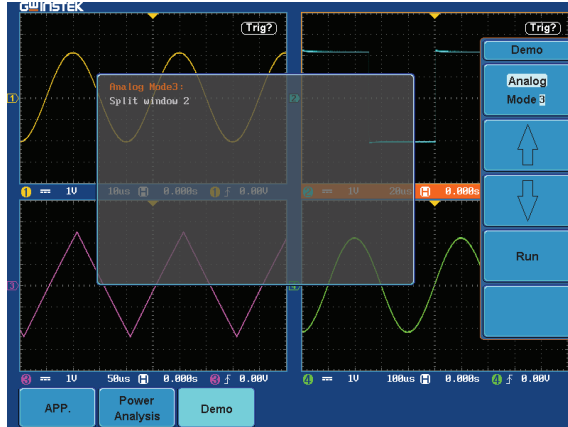

- 4. Press the Run button to display a waveform in split window as shown below.


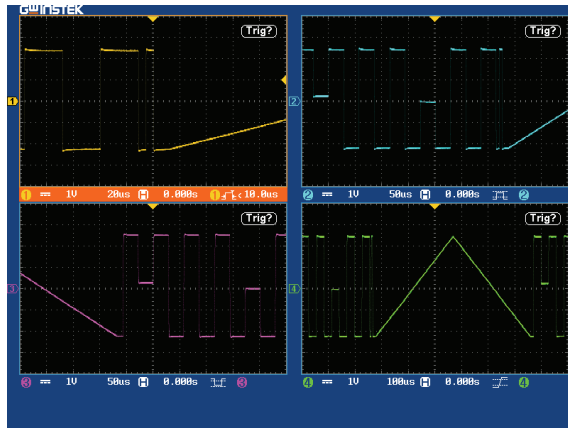



Display Auto-Range Function (Analog Mode 4)


Background Demonstrate that the oscilloscope can automatically be adjusted to the best range setting according to changes in the input signal.


Step

1. Press the *Test* key on the front panel of the GDS-3000.
2. Press the *Demo* button.
3. Press the *Down* button to select Analog Mode 4. A screen confirming Analog Mode 4 is selected as shown below appears.

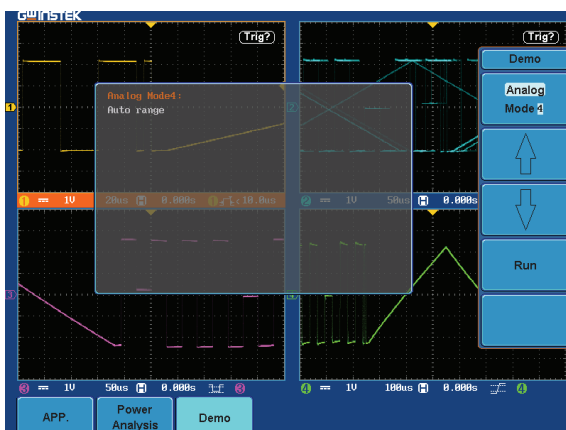

4. Press the *Run* button and *Auto-Range* key to display the waveform.





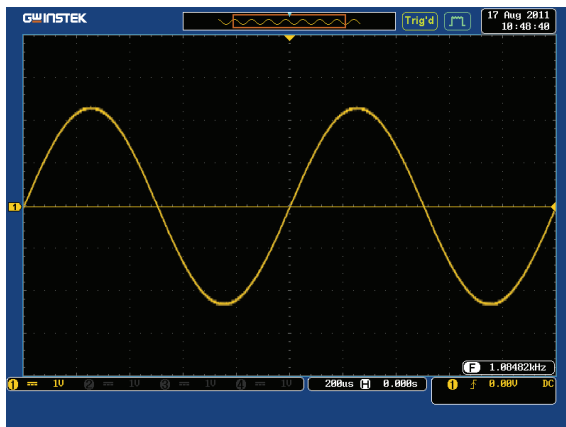


Display Autoset mode (Analog Mode 5)


Step

1. Press the *Test* key on the front panel of the GDS-3000.
2. Press the *Demo* button.
3. Press the *Down* button to select Analog Mode 5. A screen confirming Analog Mode 5 is selected as shown on the next page appears.




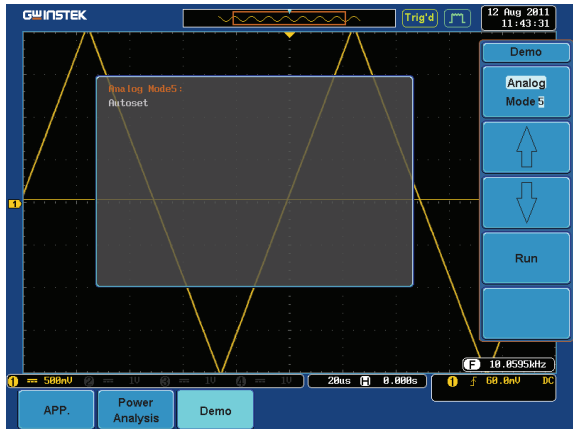


4. Press the *Run* button.




5. Press the *CH1* key to activate CH1.

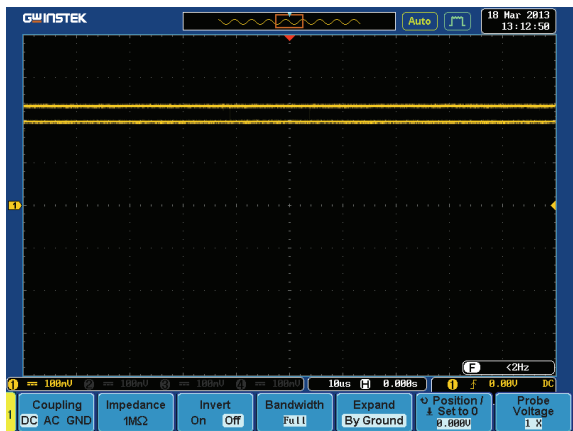

6. Set the *Coupling* to AC from the bottom menu.




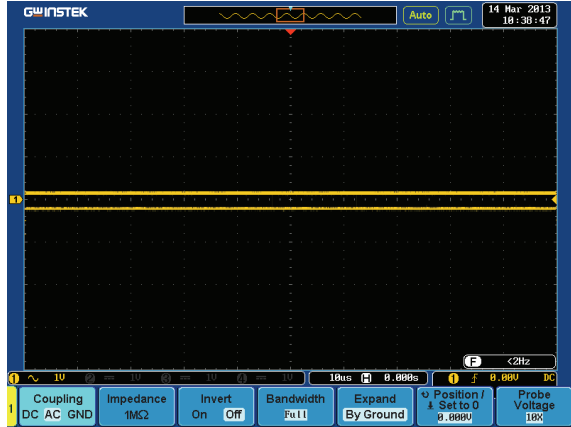

7. Press the *Autoset* key on the panel.







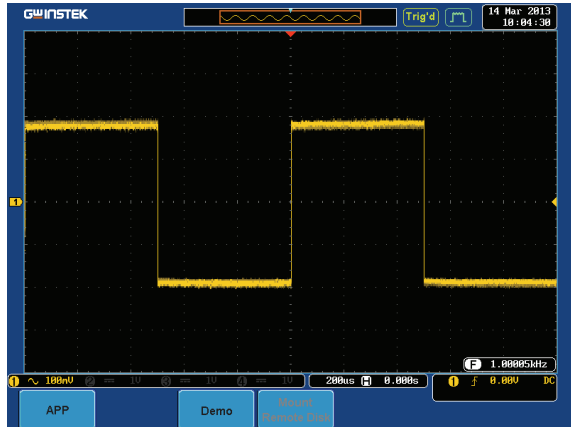
8. A waveform as shown below appears.





Display XY mode(Analog Mode 6)

Background Display 2 sets of X-Y waveform at the same time.

- | | | |
|------|--|--|
| Step | <ol style="list-style-type: none"> 1. Press the <i>Test</i> key on the front panel of the GDS-3000. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Down</i> button to select Analog Mode 6. A screen confirming Analog Mode 6 is selected as shown below appears. | 
 |

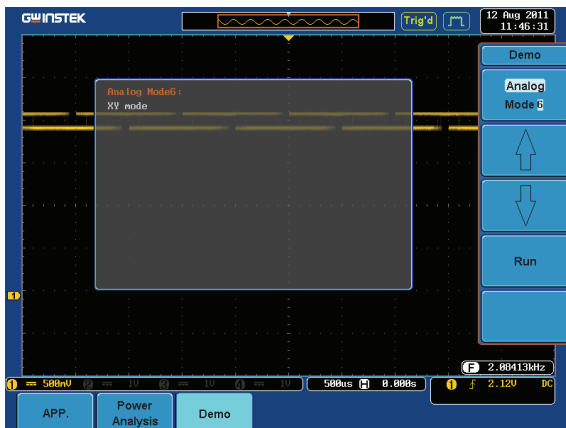

- | | |
|---|---|
| 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|

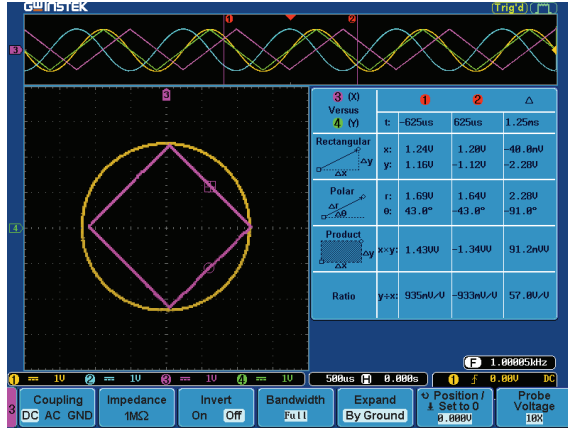

Display Gating Measurement (Analog Mode 7)

Step



1. Press the *Test* key on the front panel of the GDS-3000.




2. Press the *Demo* button.




3. Press the *Down* button to select Analog Mode 7. A screen confirming Analog Mode 7 is selected as shown on the next page appears.

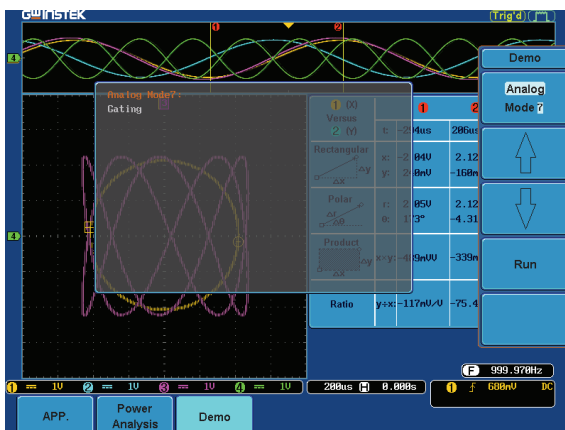

4. Press the *Run* button to display the waveform.




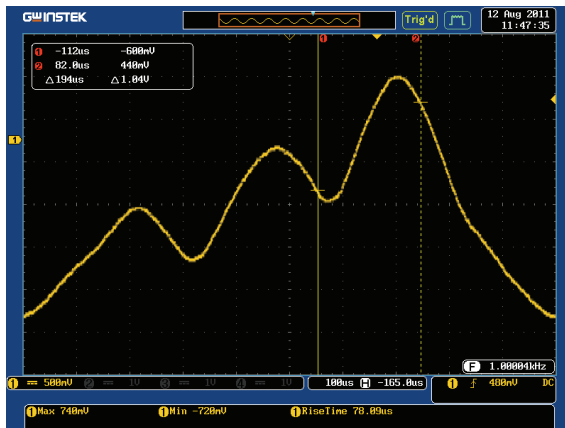





Note You can set the position of the cursors to set the range of the Gating Measurement.


Display Pulse Runt (Analog Mode 8)


- Step
1. Press the *Test* key on the front panel of the GDS-3000.
 2. Press the *Demo* button.
 3. Press the *Down* button to select Analog Mode 8. A screen confirming Analog Mode 8 is selected as shown below appears.




Display Rise Fall (Analog Mode 9)

- | | | |
|------|---|--|
| Step | <ol style="list-style-type: none"> 1. Press the <i>Test</i> key on the front panel of the GDS-3000. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Down</i> button to select Analog Mode 9. A screen confirming Analog Mode 9 is selected as shown on the next page appears. | 
 |

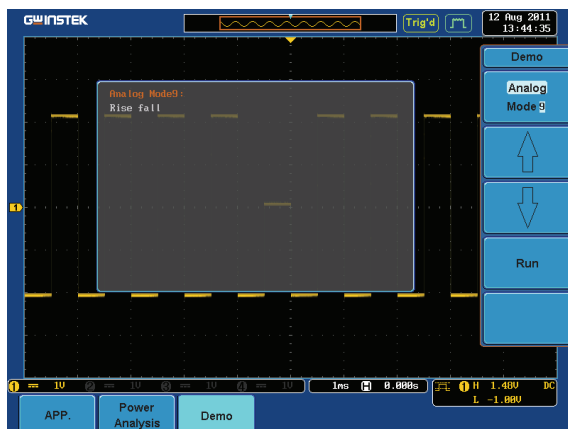


- | | |
|---|---|
| <ol style="list-style-type: none"> 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|

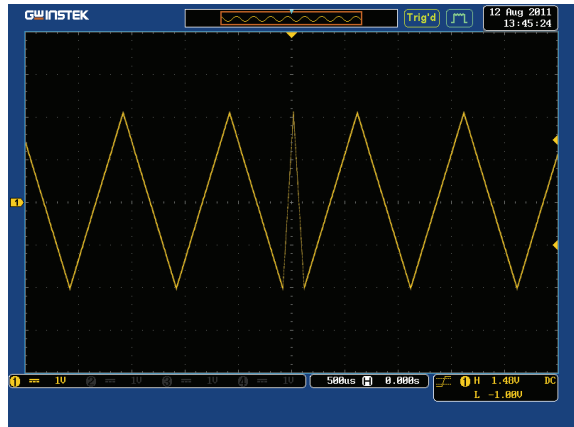



Display Pulse Width (Digital Mode 1)

Step


1. Connect the probes to the terminals marked Digital CH1~CH4, and grounding clips to ground terminal (\perp).
2. Connect the probes to corresponding CH1~CH4 terminals on the GDS-3000.
3. Press the *Test* key on the front panel of the GDS-3000.
4. Press the *Demo* button.




5. Press the *Analog Mode* button (F1 button). Use the *Variable* knob to select Digital mode. Press the *Select* button to confirm Digital 1mode is selected.

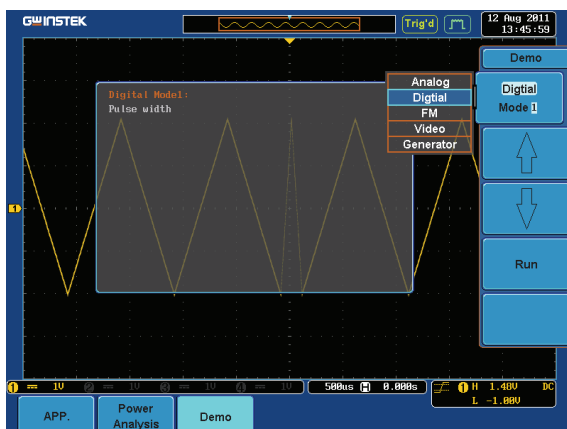

6. Press the *Run* button to display the waveform.





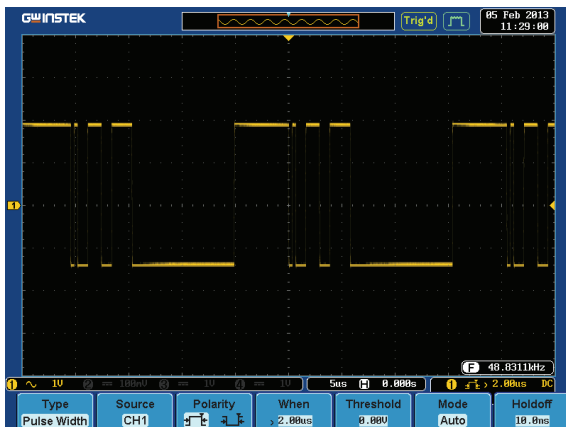


Display UART (Digital Mode 2)



Step

1. Press the *Test* key on the front panel of the GDS-3000.
2. Press the *Demo* button.
3. Press the *Down* button to select Digital Mode 2. A screen confirming Digital Mode 2 is selected as shown below appears.








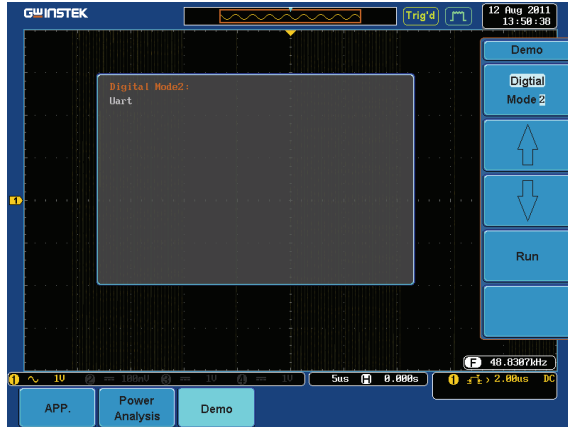



4. Press the *Run* button to display the waveform.

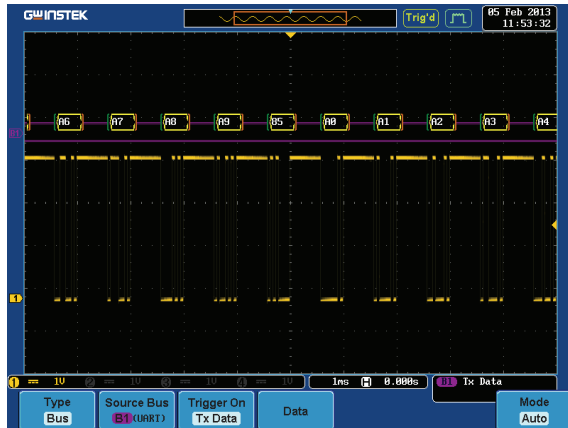

Display I²C (Digital Mode 3)

- | | | |
|------|--|--|
| Step | 1. Press the <i>Test</i> key on the front panel of the GDS-3000. |  |
| | 2. Press the <i>Demo</i> button. |  |
| | 3. Press the <i>Down</i> button to select Digital Mode 3. A screen confirming Digital Mode 3 is selected as shown below appears. | 
 |
| | 4. Press the <i>Run</i> button to display the waveform. |  |

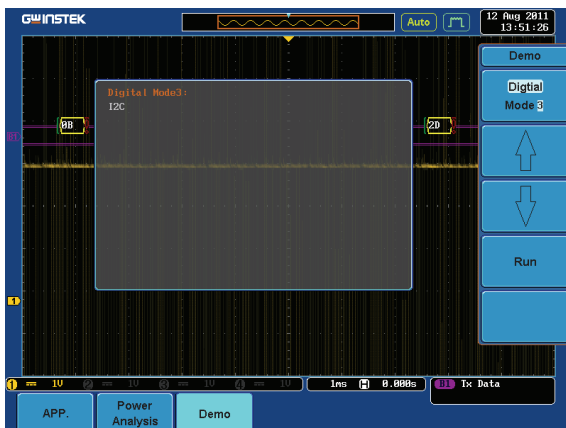


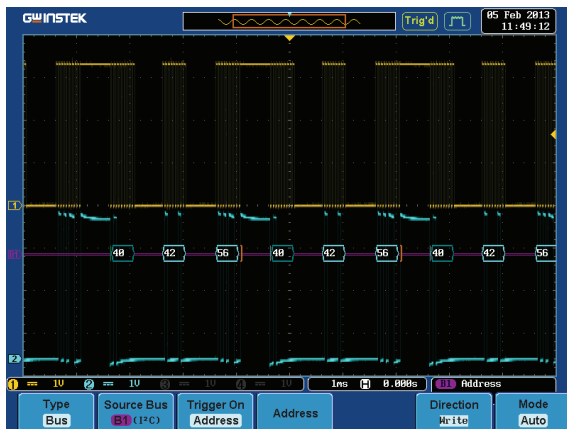

Display SPI (Digital Mode 4)



Step

1. Press the Test key on the front panel of the GDS-3000.
2. Press the *Demo* button.
3. Press the Down button to select Digital Mode 4. A screen confirming Digital Mode 4 is selected as shown on the next page appears.









4. Press the *Run* button to display the waveform.

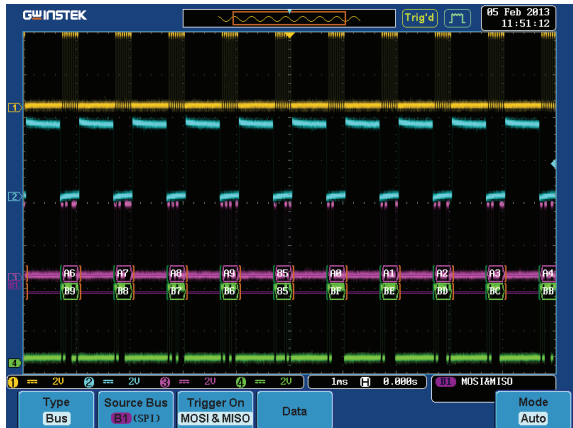



Display Delay (Digital Mode 5)


Background The Delay trigger works in tandem with the edge trigger, by waiting for a specified time or number of events before the edge trigger starts. This method allows pinpointing a location in a long series of trigger events.

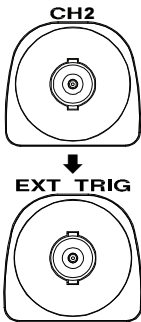- | | | |
|-------------|---|---|
| Step | <ol style="list-style-type: none"> 1. Disconnect the probe from the CH2 terminal on the GDS-3000 and move to the EXT TRIG terminal |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Test</i> key on the front panel of the GDS-3000. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 4. Press the <i>Down</i> button to select Digital Mode 5. A screen confirming Digital Mode 5 is selected as shown on the next page appears. |  |



Display FM (FM mode)

- Step
1. Connect a probe to the FM terminal on the demo board.
Connect the grounding clip to the ground terminal (\perp).
 2. Connect the other end of probe to CH1 terminal on the GDS-3000.
 3. Press the *Test* key on the front panel of the GDS-3000.
 4. Press the *Demo* button.
 5. Press the *Digital* mode button (F1 button). Use the *Variable* knob to select FM mode. Press the *Select* button to confirm FM mode is selected.




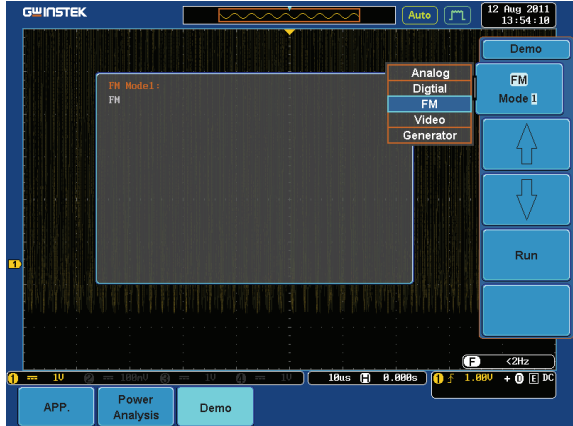



6. Press the *Run* button to display the waveform.

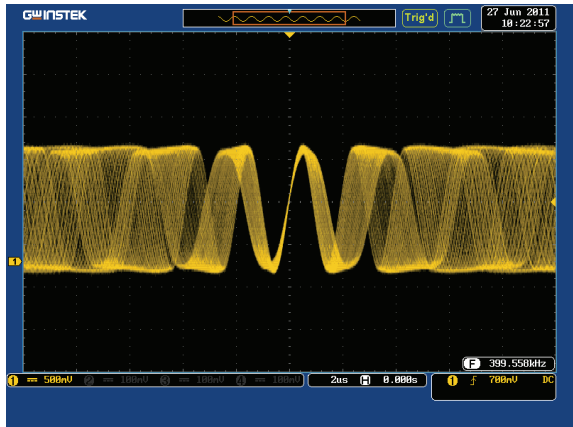



Display Video (Video mode)

- Step
1. Connect a probe to the Video terminal on the demo board.
Connect the grounding clip to the ground terminal (\perp).
 2. Connect the other end of probe to the CH1 terminal on the GDS-3000.
 3. Press the *Test* key on the front panel of the GDS-3000.
 4. Press the *Demo* button.
 5. Press *FM* button (F1 button). Use the *Variable* knob to select Video mode. Press the *Select* button to confirm Video mode is selected.



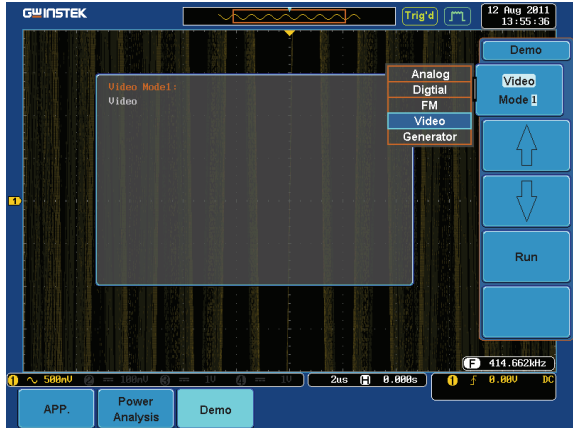




6. Press the *Run* button to display the waveform.

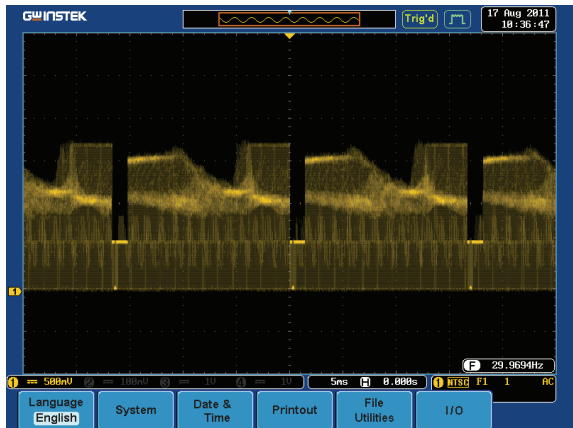

Display Sine, Square and Triangle waveform (Generator mode)

1. Connect the probe to the terminal marked  on the demo board. Connect the grounding clip to the ground terminal (\perp).
2. Connect the other end of probe to the CH1 terminal on the GDS-3000.
3. Press the *Test* key on the front panel of the GDS-3000.
4. Press the *Demo* button.
5. Press the *Video Mode* button (F1 button). Use the *Variable* knob to select Generator mode. Press the *Select* button to confirm Generator mode is selected.






6. Press the *Run* button.




7. Press the AutoSet button to display the Sine waveform.

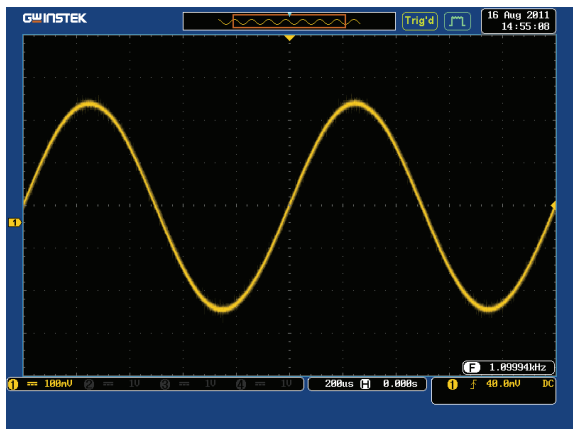


8. Press the *Select* button on the demo board.




9. Adjust the *Variable* knob on the demo board to select the Wave Type. *Wave Type* is selected when it is highlighted on the OLED display.




10. Push the Select button to change the highlight to the bottom line on the OLED display.




11. Adjust the *Variable* knob on the demo board to select *Square*. *Square* is selected when it is highlighted on the OLED display.




12. Press the *AutoSet* button to display the Square waveform.

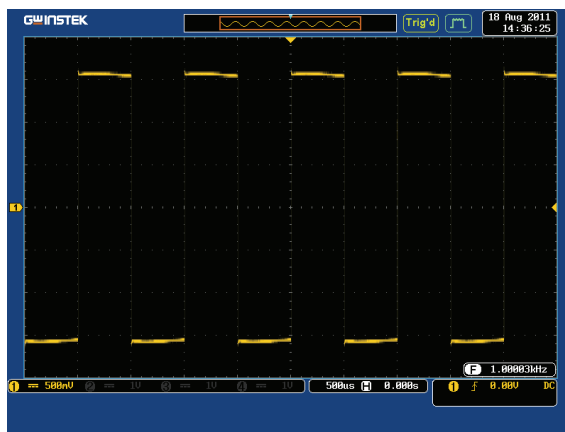

13. Adjust the *Variable* knob on the demo board to select *Triangle*. *Triangle* is selected when it is highlighted on the OLED display.





14. Press the *AutoSet* button to display the Triangle waveform.

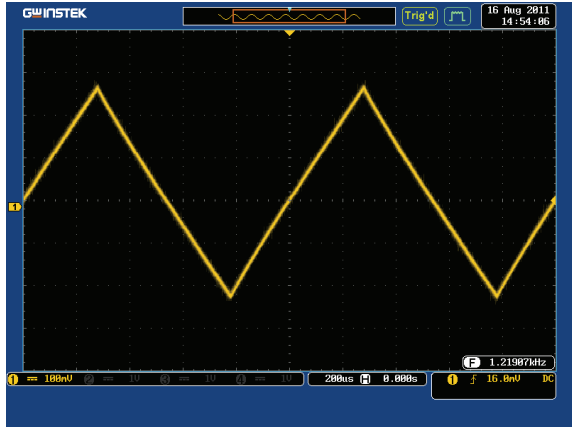

GDS-2000A


Demonstration setup

- | | | |
|------|---|---|
| Step | 8. Turn on the GDS-2000A. |  |
| | 9. Install the Demo module software. Please refer to the chapter "SOFTWARE INSTALLATION" on page 53 for details. | |
| Note | A. Please make sure that the firmware version is V1.09 or above.
B. Please refer to the "Appendix" chapter for information about updating the firmware. | |
| | 10. Connect the USB cable as shown in the following diagram to power up the demo board. Connect the Type A plug to the GDS-2000A and the Type B plug to the demo board. | |

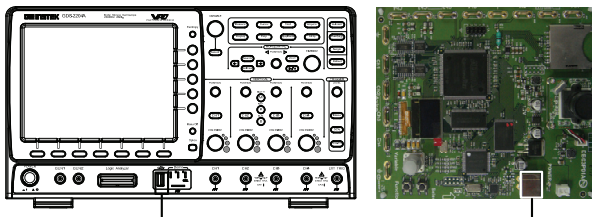


Note Make sure the power LED on the demo board turns on.

11. Select x10 as the attenuation on the probe to limit the input signal amplitude if the probe you are using is selectable from x1 and x10.




12. Depending on the type of waveform you want to display, connect the probes to the terminals marked, Analog CH1~CH4, Digital CH1~CH4, Video, FM as shown in the diagrams below. Connect the grounding clips to ground terminal (\perp).


For displaying analog waveform

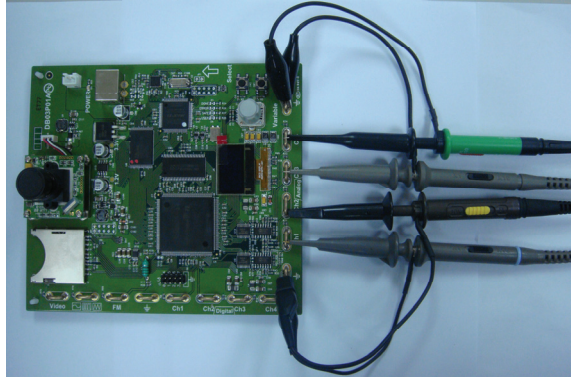


For displaying digital waveform

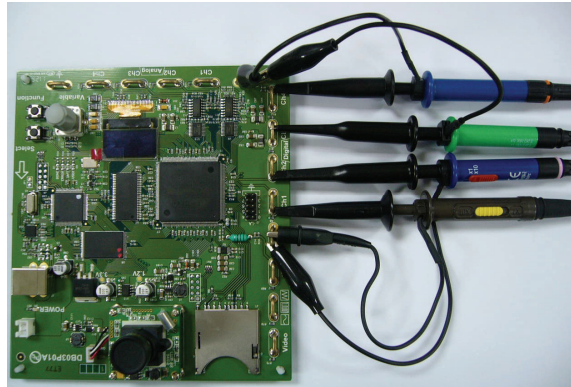


For displaying FM waveform

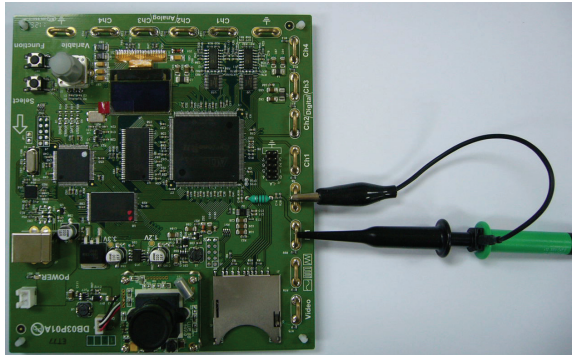

For displaying video waveform

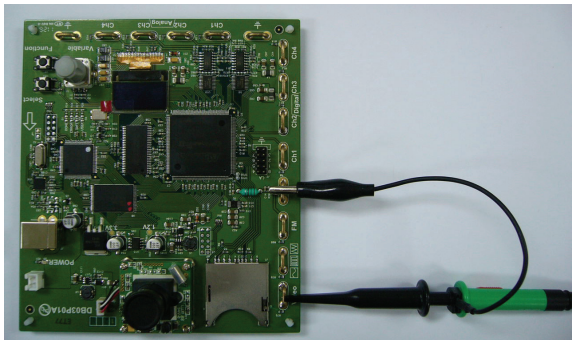

13. Connect the other end of the probe(s) to the corresponding CH1 to CH4 terminals on the GDS-2000A.
14. Connect the GDS-2000A and the demo board with the Logic Analyzer Probe as shown in the photo below for displaying the LA source.

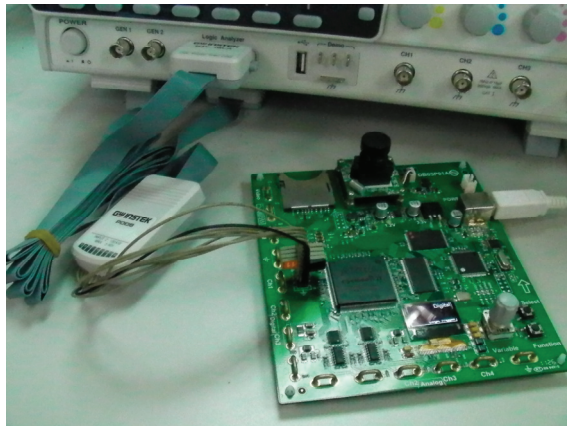

15. Adjust the *Variable* knob on the demo board to select which oscilloscope to demonstrate when the USB cable is connected to the demo board and the oscilloscope. The GDS-2000A is selected when it is highlighted on the OLED display.



Software installation

Step 1. Insert the USB memory stick with GDB03DemoMode.gz into the USB port on the front panel of the GDS-2000A.

Note

- GDS2kAGDB03DemoMode.gz comes from the GDS2kAGDB03DemoMode.zip file. When you unzip the zip file, two files are generated. One is GDS2kAGDB03DemoMode.gz for the software installation and the other is this user manual in PDF format.

- Make sure the firmware version is V1.09 or higher.



2. Press the *Utility* key.



3. Select *File Utilities* from the bottom menu.





4. Use the Variable knob to select the USB memory stick and then press the Select button.

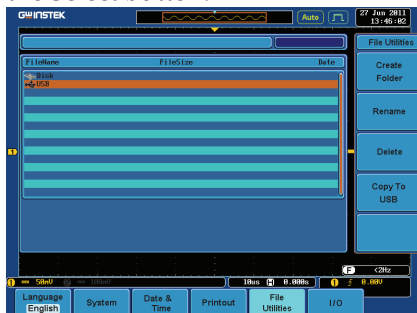

- Use the Variable knob to select GDB03DemoMode.gz file and then press the Select button to select it.

Up
Down
VARIABLE

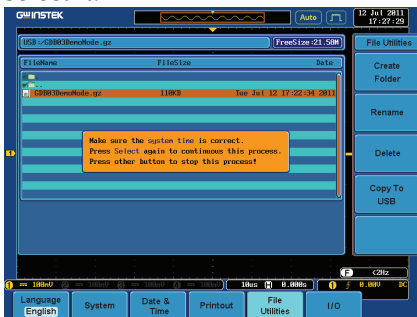

- Press the Select button again to start installation.



- The installation is complete when a message showing "Please turn off the oscilloscope and turn on again" is displayed.

Display demo board signal

The demo board can be used to display 8 types of analog signals, 7 types of digital signals, FM and video signals. Please follow the procedure listed below to display each signal in sequence.


Display Autoset mode (Analog Mode 1)

Step


1. Press the *Test* key on the front panel of the GDS-2000A.




2. Press the *Demo* button.



3. Press the *Down* button to select Analog Mode 1. A screen confirming Analog Mode 1 is selected as shown on the next page appears.





4. Press the *Run* button.



5. Press the *CH1* key to activate CH1.




6. Set the *Coupling* to AC from the bottom menu.

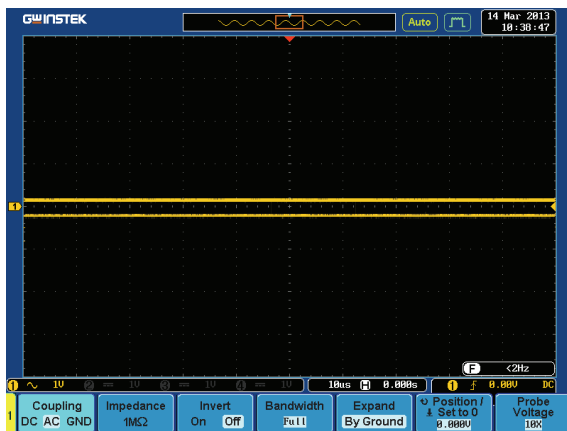

7. Press the *Autoset* key on the panel.



8. A waveform as follow shown appears.


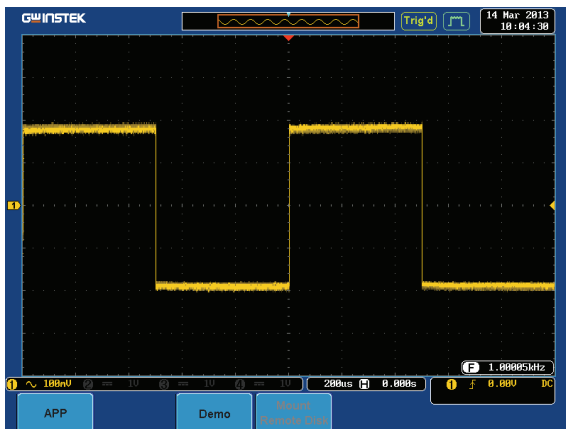



Display XY mode(Analog Mode 2)

Background Display 2 sets of X-Y waveform at the same time.



Step

1. Press the *Test* key on the front panel of GDS-2000A.
2. Press the *Demo* button.
3. Press the *Down* button to select Analog Mode 2. A screen confirming Analog Mode 2 is selected as shown below appears.



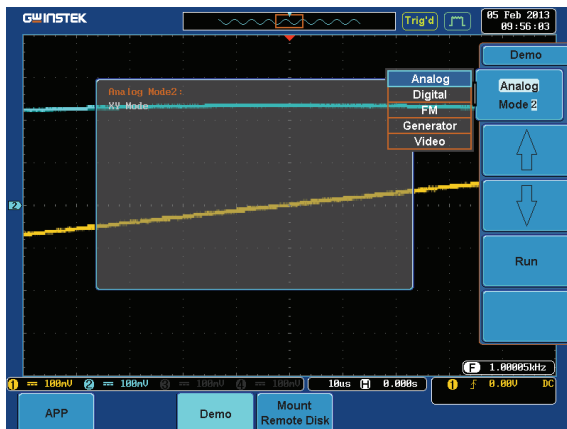

4. Press the *Run* button to display the waveform.

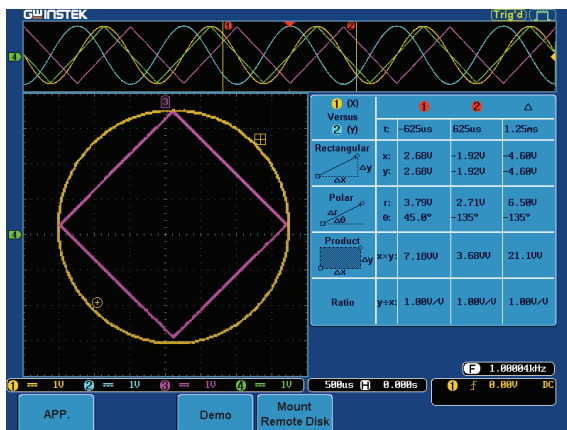

Display Gating Measurement (Analog Mode 3)

Step



1. Press the *Test* key on the front panel of the GDS-2000A.




2. Press the *Demo* button.




3. Press the *Down* button to select Analog Mode 3. A screen confirming Analog Mode 3 is selected as shown on the next page appears.

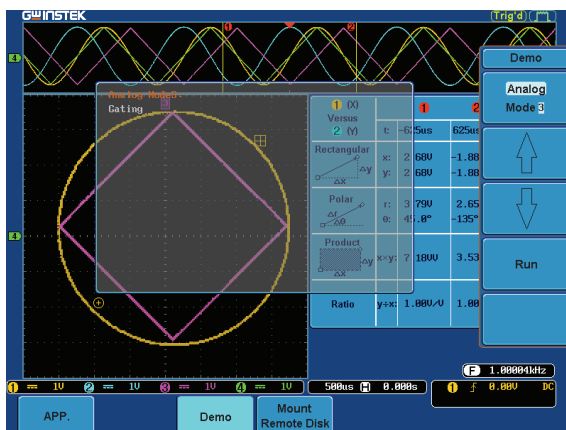

4. Press the *Run* button to display the waveform.



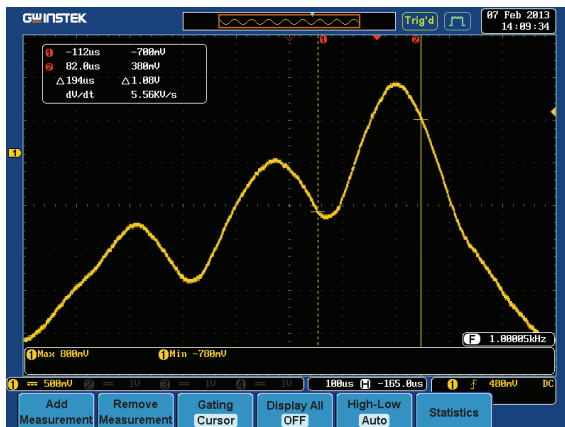


Note You can set the position of the cursors to set the range of the Gating Measurement.

Display Pulse Runt (Analog Mode 4)

Step


1. Press the *Test* key on the front panel of the GDS-2000A.




2. Press the *Demo* button.





3. Press the *Down* button to select Analog Mode 4. A screen confirming Analog Mode 4 is selected as shown below appears.







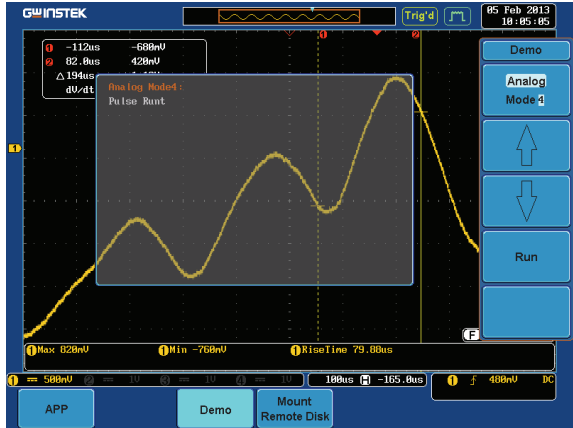



4. Press the *Run* button to display the waveform.

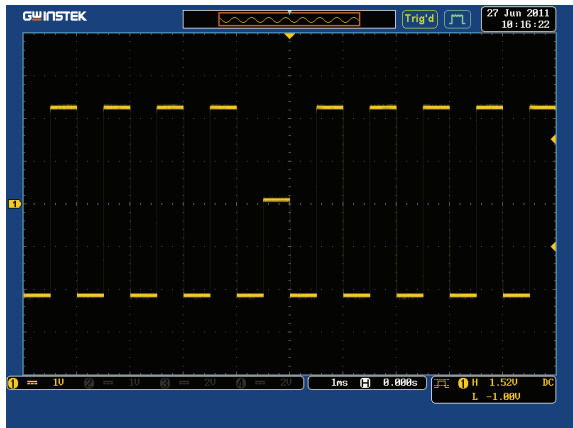


Display Rise Fall (Analog Mode 5)

- | | | |
|------|---|--|
| Step | <ol style="list-style-type: none"> 1. Press the <i>Test</i> key on the front panel of the GDS-2000A. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Down</i> button to select Analog Mode 5. A screen confirming Analog Mode 5 is selected as shown on the next page appears. | 
 |

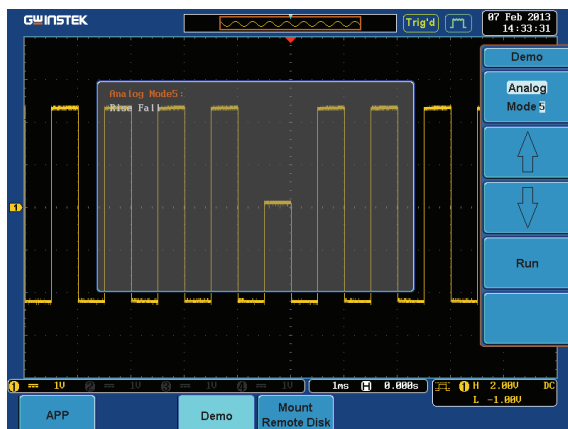


- | | |
|---|---|
| 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|

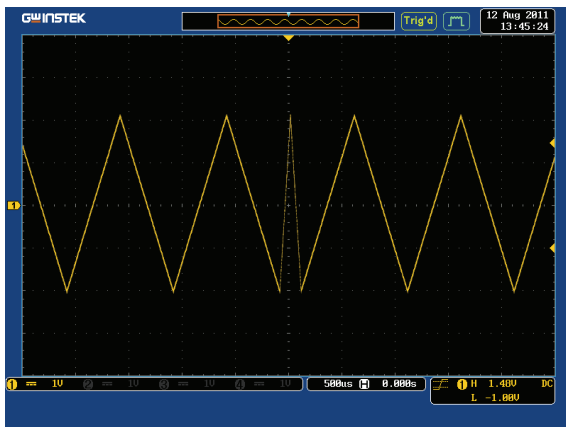


Display Search (Analog Mode 6)



Step

1. Press the *Test* key on the front panel of the GDS-2000A.
2. Press the *Demo* button.
3. Press the *Down* button to select Analog Mode 6. A screen confirming Analog Mode 6 is selected as shown on the next page appears.








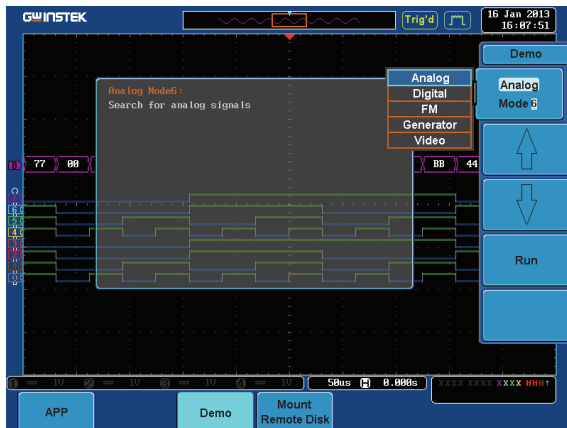
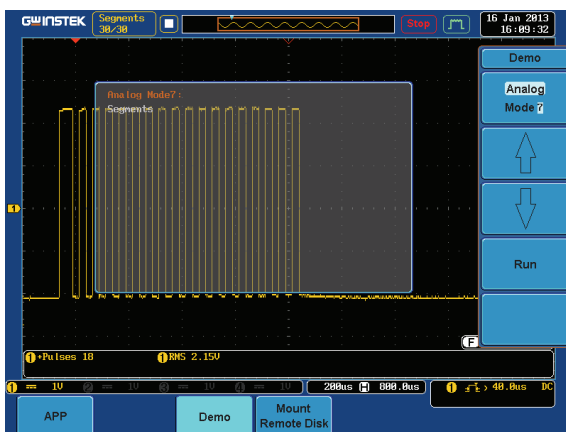



4. Press the *Run* button to display the waveform.

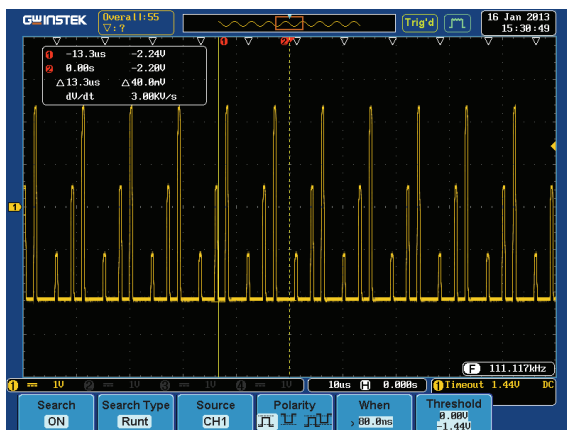

Display Segments (Analog Mode 7)

- | | | |
|------|--|--|
| Step | 1. Press the <i>Test</i> key on the front panel of the GDS-2000A. |  |
| | 2. Press the <i>Demo</i> button. |  |
| | 3. Press the <i>Down</i> button to select Analog Mode 7. A screen confirming Analog Mode 7 is selected as shown below appears. | 
 |
| | 4. Press the <i>Run</i> button to display the waveform. |  |
| | 5. The function key on the demo board should be press down before the segments waveform can be outputted. |  |




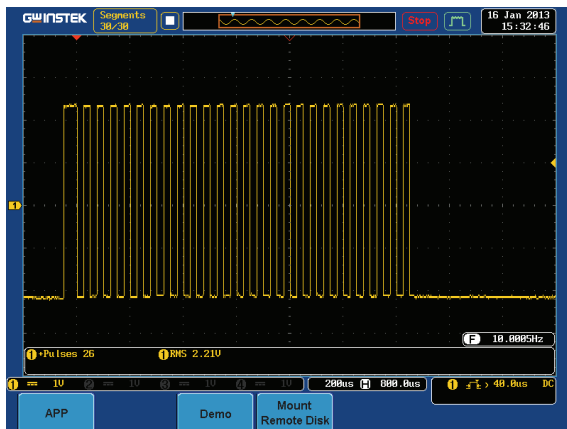


Display Parallel (Analog Mode 8)


Step

1. Press the *Test* key on the front panel of the GDS-2000A.
2. Press the *Demo* button.
3. Press the *Down* button to select Analog Mode 8. A screen confirming Analog Mode 8 is selected as shown on the next page appears.



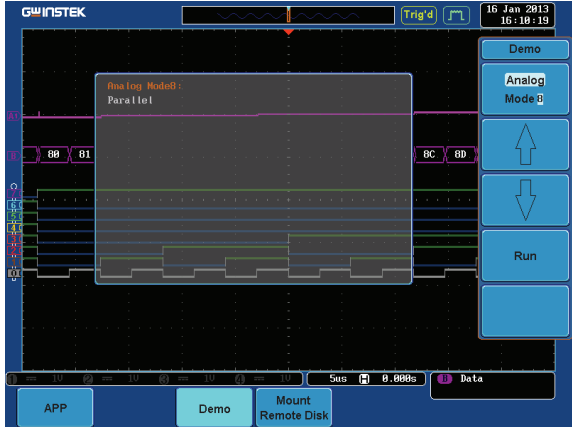

4. Press the *Run* button to display the waveform.



Display Pulse Width (Digital Mode 1)

Step


1. Connect the probes to the terminals marked Digital CH1~CH4, and grounding clips to ground terminal (\perp).

2. Connect the probes to corresponding CH1~CH4 terminals on the GDS-2000A.



3. Press the *Test* key on the front panel of GDS-2000A.




4. Press the *Demo* button.





5. Press the *Analog Mode* button (F1 button). Use the *Variable* knob to select Digital mode. Press the *Select* button to confirm Digital Mode 1 is selected.



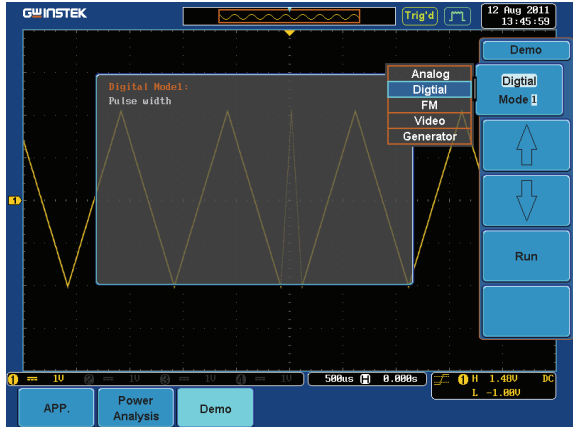




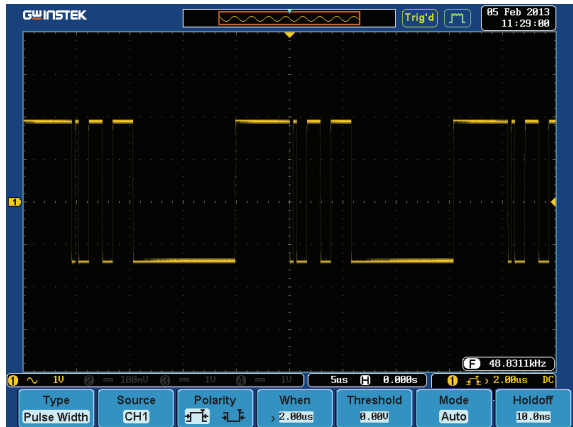



6. Press the Run button to display the waveform.





Display Delay (Digital Mode 2)

Background The Delay trigger works in tandem with the edge trigger, by waiting for a specified time or number of events before the edge trigger starts. This method allows pinpointing a location in a long series of trigger events.



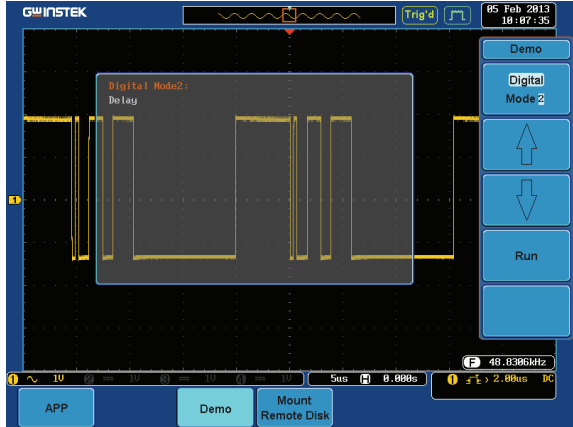

- | | | |
|-------------|---|---|
| Step | <ol style="list-style-type: none"> 1. Disconnect the probe from the CH2 terminal on the GDS-2000A and move to the EXT TRIG terminal | <p>CH2</p>  <p>↓</p> <p>EXT TRIG</p>  |
| | <ol style="list-style-type: none"> 2. Press the <i>Test</i> key on the front panel of the GDS-2000A. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 4. Press the <i>Down</i> button to select Digital Mode 2. A screen confirming Digital Mode 2 is selected as shown on the next page appears. |   |

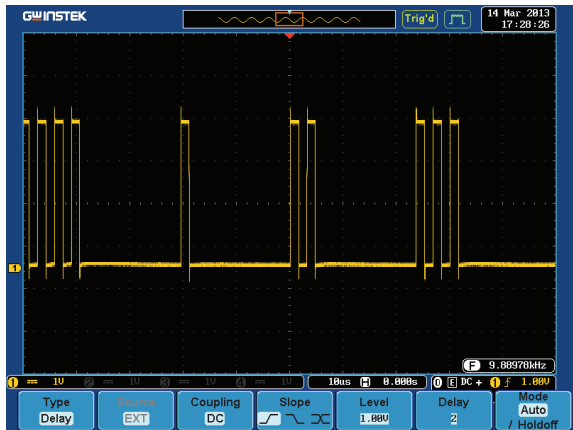



- 5. Press the *Run* button to display the waveform.





Display LM (Logic Memory) (Digital Mode 3)

- | | | |
|------|--|--|
| Step | 1. Press the <i>Test</i> key on the front panel of the GDS-2000A. |  |
| | 2. Press the <i>Demo</i> button. |  |
| | 3. Press the <i>Down</i> button to select Digital Mode 3. A screen confirming Digital Mode 3 is selected as shown below appears. | 
 |

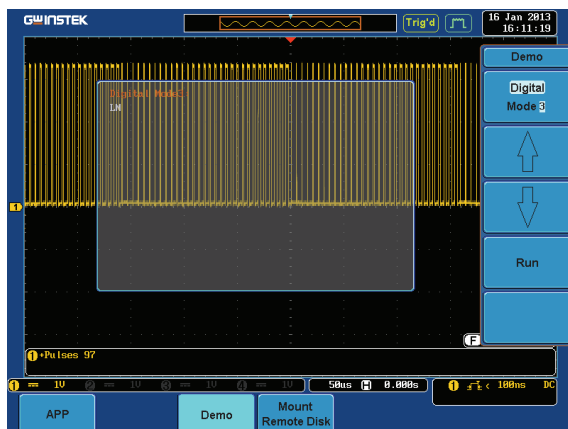



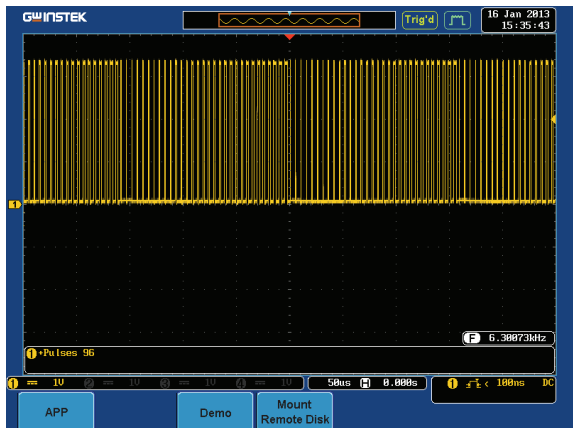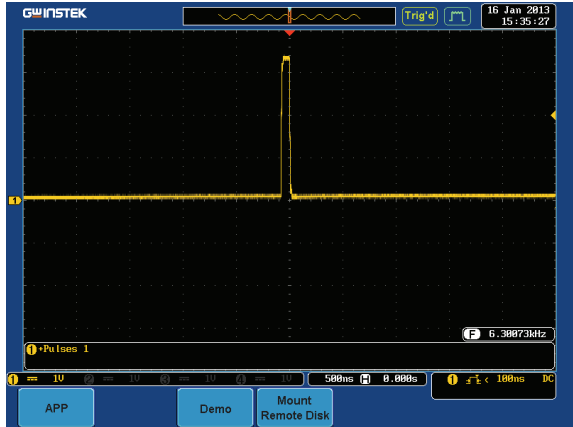

- | | |
|---|---|
| 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|





Note


If we compare the waveforms shown above, we can see that we can observe more of the waveform under long memory.

Display Logic (Digital Mode 4)

- | | | |
|------|--|--|
| Step | <ol style="list-style-type: none"> 1. Press the Test key on the front panel of the GDS-2000A. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the Down button to select Digital Mode 4. A screen confirming Digital Mode 4 is selected as shown on the next page appears. | 
 |

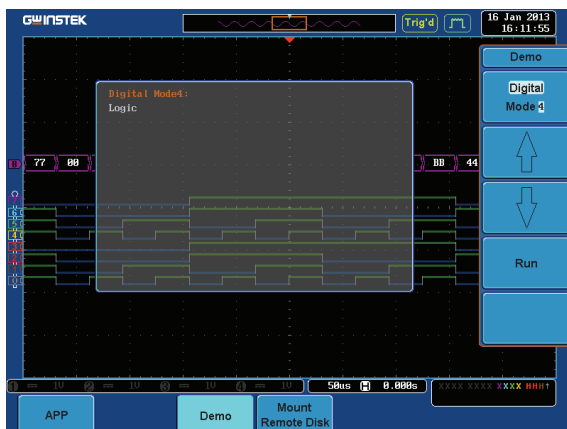



- | | |
|---|---|
| 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|

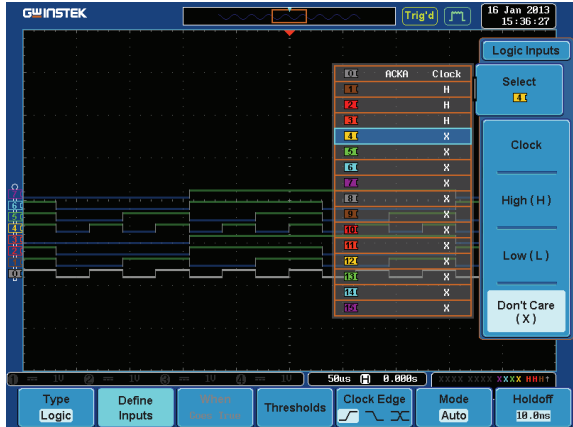


Display UART (Digital Mode 5)



Step

1. Press the *Test* key on the front panel of the GDS-2000A.
2. Press the *Demo* button.
3. Press the *Down* button to select Digital Mode 5. A screen confirming Digital Mode 5 is selected as shown below appears.



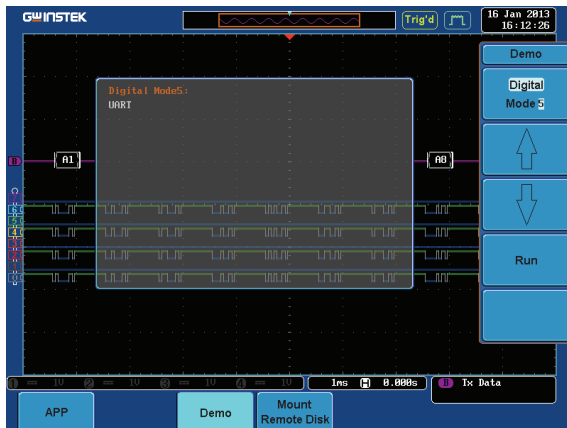





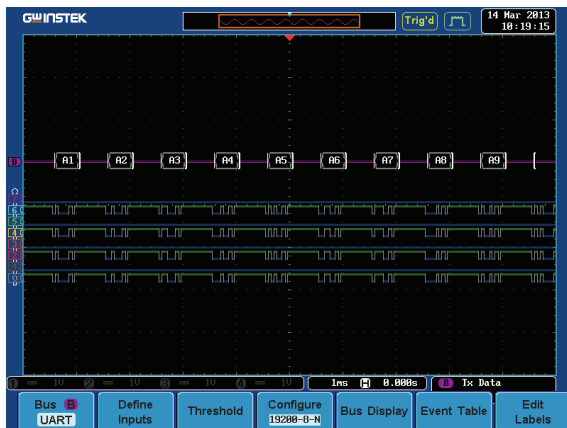


- 4. Press the *Run* button to display the waveform.



Display I²C (Digital Mode 6)

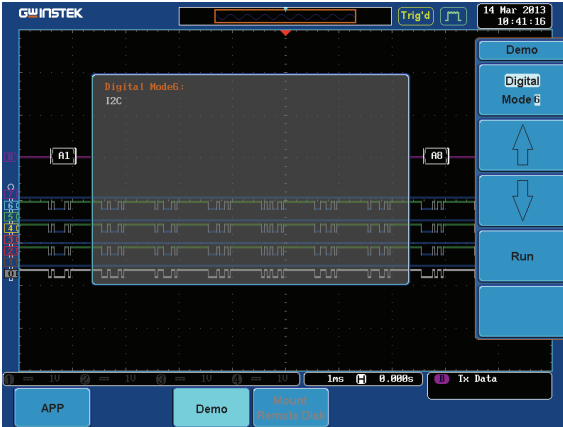

- | | | |
|------|--|--|
| Step | <ol style="list-style-type: none"> 1. Press the <i>Test</i> key on the front panel of the GDS-2000A. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the <i>Down</i> button to select Digital Mode 6. A screen confirming Digital Mode 6 is selected as shown below appears. | 
 |
| |  | |
| | <ol style="list-style-type: none"> 4. Press the <i>Run</i> button to display the waveform. |  |

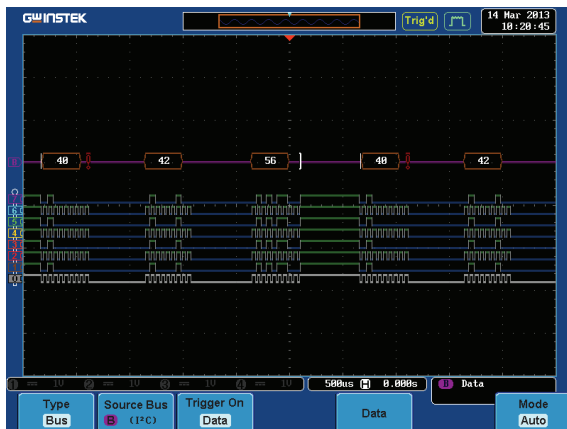

Display SPI (Digital Mode 7)



Step

1. Press the Test key on the front panel of the GDS-2000A.
2. Press the *Demo* button.
3. Press the Down button to select Digital Mode 7. A screen confirming Digital Mode 7 is selected as shown on the next page appears.











- 4. Press the *Run* button to display the waveform.

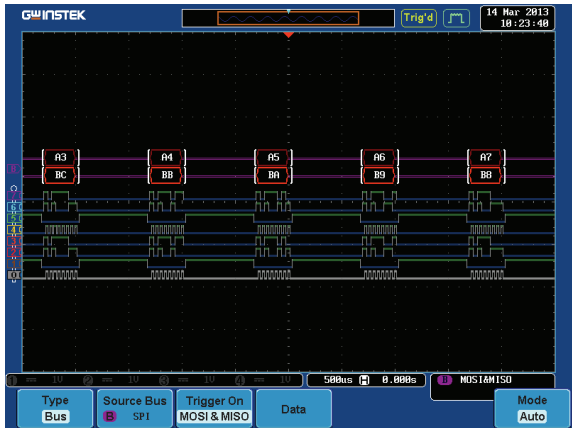


Display CAN (Digital Mode 8)

- | | | |
|------|--|--|
| Step | <ol style="list-style-type: none"> 1. Press the Test key on the front panel of the GDS-2000A. |  |
| | <ol style="list-style-type: none"> 2. Press the <i>Demo</i> button. |  |
| | <ol style="list-style-type: none"> 3. Press the Down button to select Digital Mode 8. A screen confirming Digital Mode 8 is selected as shown on the next page appears. | 
 |

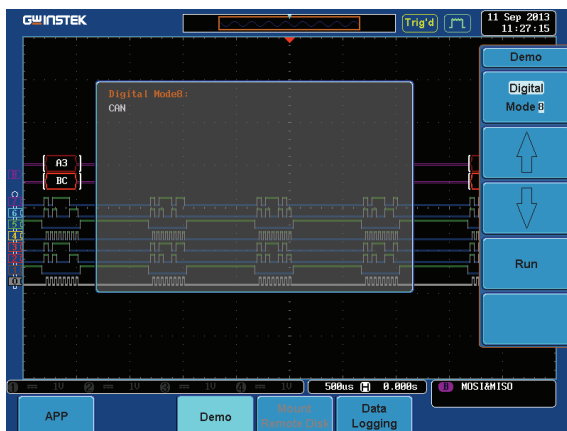

- | | |
|---|---|
| <ol style="list-style-type: none"> 4. Press the <i>Run</i> button to display the waveform. |  |
|---|---|

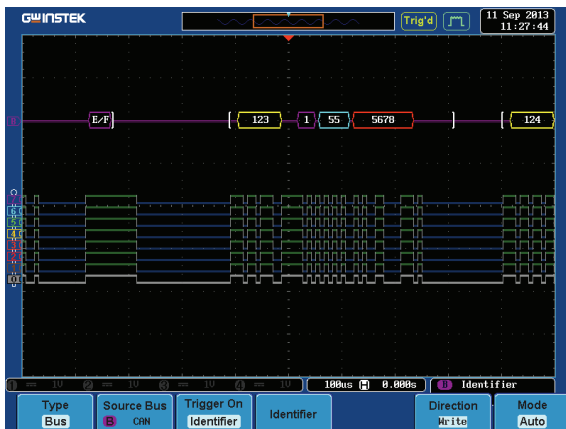


Display LIN (Digital Mode 9)


Step

1. Press the Test key on the front panel of the GDS-2000A.
2. Press the *Demo* button.
3. Press the Down button to select Digital Mode 9. A screen confirming Digital Mode 9 is selected as shown on the next page appears.



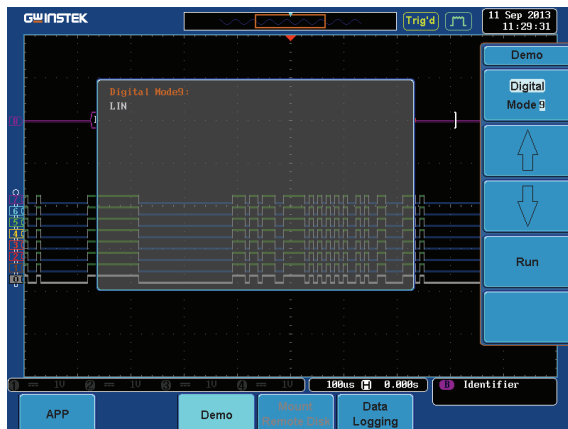

4. Press the *Run* button to display the waveform.



Display FM (FM mode)

Step

1. Connect a probe to the FM terminal on the demo board. Connect the grounding clip to the ground terminal (\perp).

2. Connect the other end of probe to CH1 terminal on the GDS-2000A.




3. Press the *Test* key on the front panel of the GDS-2000A.




4. Press the *Demo* button.




5. Press the *Digital* mode button (F1 button). Use the *Variable* knob to select FM mode. Press the *Select* button to confirm FM mode is selected.

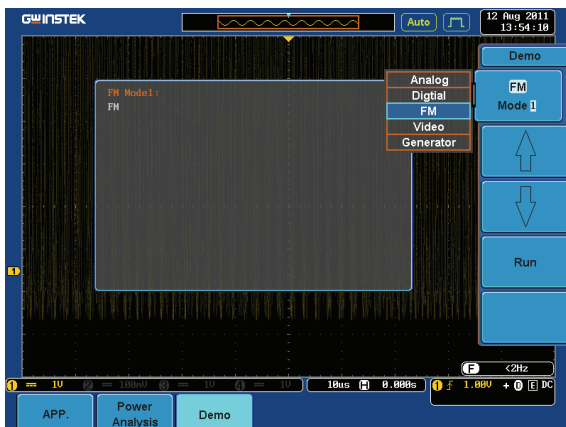



6. Press the *Run* button to display the waveform.




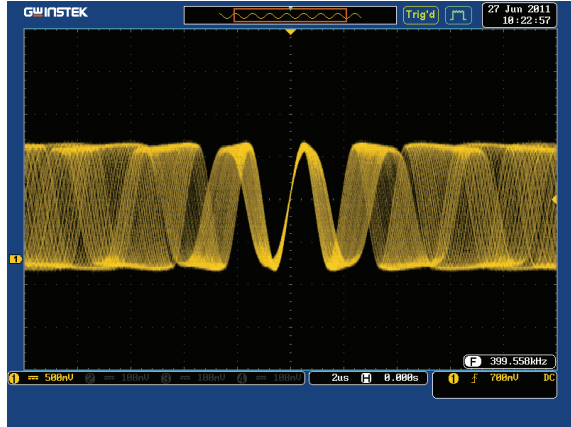



Display Video (Video mode)

- Step
1. Connect a probe to the Video terminal on the demo board.
Connect the grounding clip to the ground terminal (\perp).
 2. Connect the other end of probe to the CH1 terminal on the GDS-2000A.
 3. Press the *Test* key on the front panel of the GDS-2000A.
 4. Press the *Demo* button.
 5. Press *FM* button (F1 button). Use the *Variable* knob to select Video mode. Press the *Select* button to confirm Video mode is selected.



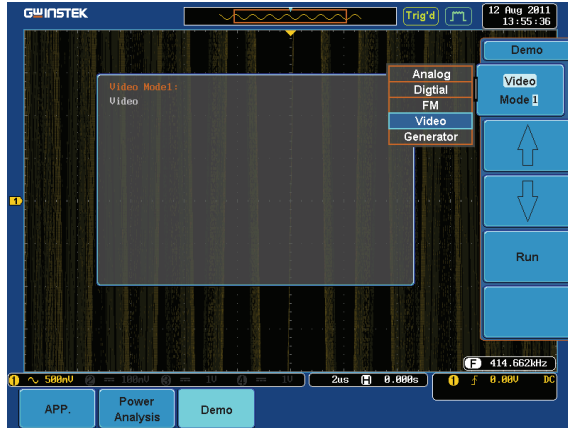





6. Press the *Run* button to display the waveform.

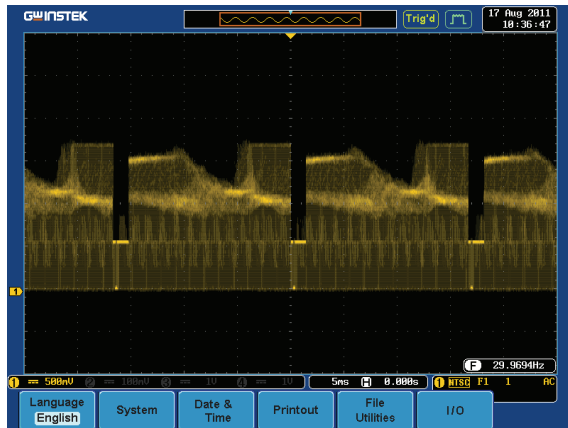


Display Sine, Square and Triangle waveform (Generator mode)

1. Connect the probe to the terminal marked  on the demo board. Connect the grounding clip to the ground terminal (\perp).
2. Connect the other end of probe to the CH1 terminal on the GDS-2000A.
3. Press the *Test* key on the front panel of the GDS-2000A.
4. Press the *Demo* button.
5. Press the *Video Mode* button (F1 button). Use the *Variable* knob to select Generator mode. Press the *Select* button to confirm Generator mode is selected.







6. Press the *Run* button.




7. Press the AutoSet button to display the Sine waveform.

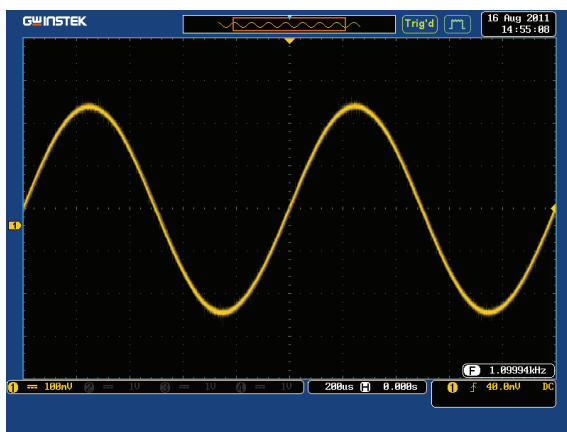


8. Press the *Select* button on the demo board.




9. Adjust the *Variable* knob on the demo board to select the Wave Type. *Wave Type* is selected when it is highlighted on the OLED display.




10. Push the *Select* button to change the highlight to the bottom line on the OLED display.




11. Adjust the *Variable* knob on the demo board to select *Square*. *Square* is selected when it is highlighted on the OLED display.





12. Press the *AutoSet* button to display the Square waveform.

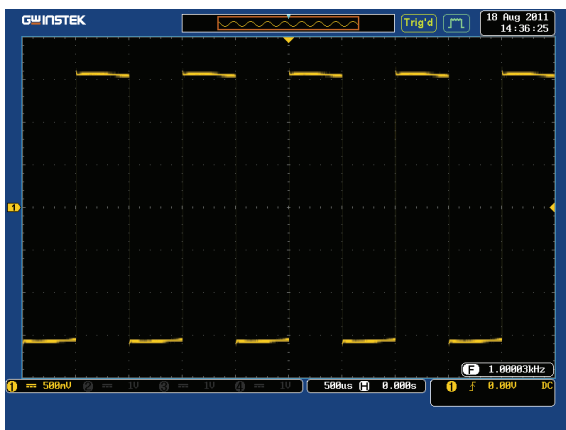

13. Adjust the *Variable* knob on the demo board to select *Triangle*. *Triangle* is selected when it is highlighted on the OLED display.



14. Press the *AutoSet* button to display the Triangle waveform.

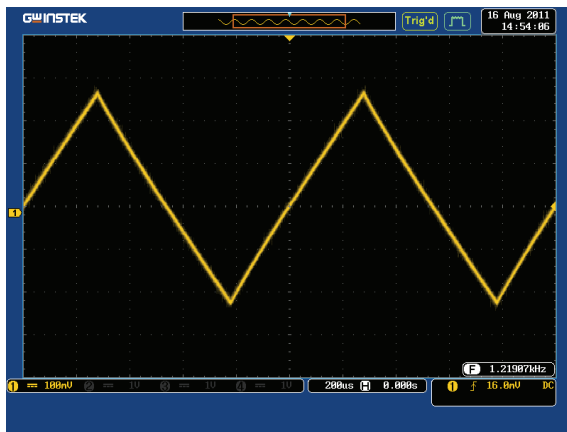

APPENDIX

Upgrading the GDS-3000/GDS-2000A Firmware

UPGRADE PROCEDURE

This firmware upgrade guide describes how to upgrade both the DSO firmware and the operating system kernel.




The following note is for the GDS-3000 only.

If the existing firmware version is earlier than v1.07, please repeat this firmware upgrade procedure twice.



For firmware versions earlier than v1.07 (v1.00~v1.06), please upgrade both the DSO firmware and the OS kernel (follow the operation steps 1 to 10). This means that you need to do the same upgrade procedure twice .

If upgrading the firmware from V1.07 to v1.08 or later, only update the firmware. The kernel upgrade is not required (follow operation steps 1 to 6).



- Upgrade firmware
1. Insert a USB flash disk containing the firmware file, **xxx.upg** into the front panel USB slot.
 2. Remove all probes and cables from the BNC terminals.
 3. Press the *Utility* key and select *File Utilities* from the bottom menu.



4. Rotate the *Variable* knob to select the USB directory and then press the *Select* key.

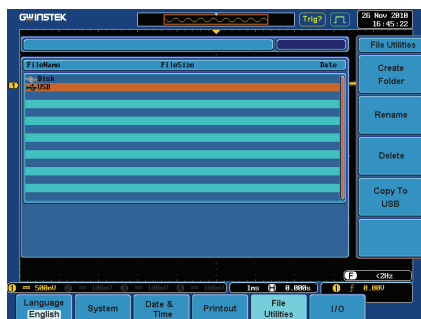

5. Rotate the *Variable* knob to select the **xxx.upg** file and then press the *Select* key. Press the *Select* key again to begin the upgrade procedure.

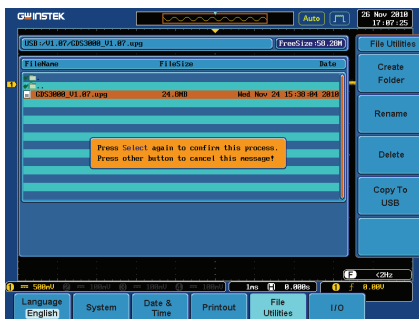

6. When the procedure has completed restart the scope.



Note

For the GDS-3000 models:

Steps 7 & 8 only apply to 5GSa/s models (GDS-3154, GDS-3254, GDS-3352/4).

2.5GSa/s models (GDS-3152 & GDS-3252) will bypass these two steps.

Upgrade Kernel

7. When the screen goes “blank” during the booting process, press the lit CH1 key **three times**. (For GDS-3154, GDS-3254, GDS-3352/4 , 5GSa/s models only)





8. The scope will return to the main screen after the CH1 key has been pressed. (For GDS-3154, GDS-3254, GDS-3352/4 , 5GSa/s models only)
9. Repeat steps 3~6 to upgrade the kernel. The same file is used again to upgrade the kernel.
10. When the calibration message appears for the second time after the oscilloscope has restarted, press "TEST" in order to perform the phase calibration officially. (For GDS-3154, GDS-3254, GDS-3352/4 , 5GSa/s models only)


Please note that the entire phase calibration may take about 10 minutes.

11. The upgrade procedure is complete after the second upgrade.
-

For more information, contact your local dealer or GWInstek at www.gwinstek.com / marketing@goodwill.com.tw.

Upgrading the GDB-03 Demo Board Firmware

- Step
1. Please copy the gdb3h.rom, gdb3m.rom and gdb3s.rom (3 files in total) from GDB-03 CD to root directory of an SD card.
 2. Insert the SD card into the SD card slot on the GDB-03 demo board and connect the USB cable to the GDS-2000A or GDS-3000.

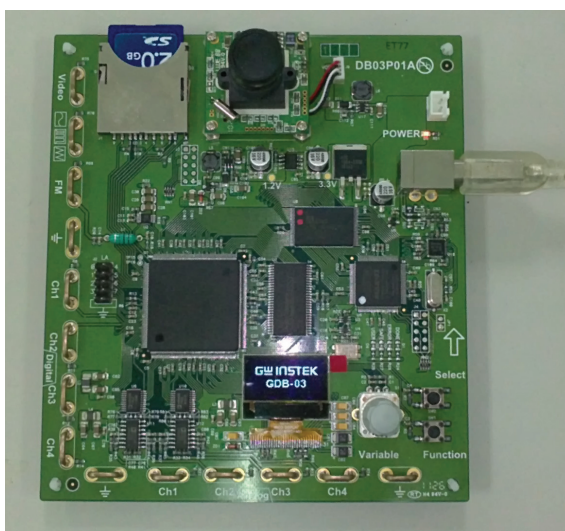

3. When “GW INSTEK” is displayed on the GDB-03 OLED screen, quick turn the *Variable* knob to trigger the firmware upgrading process. A message on the OLED screen as shown in the photo will appear.



4. Press the *Function* button key to start the procedure. A message on the OLED screen as shown in the photo below will appear during upgrading process.



5. Upgrading the firmware is complete. Disconnect the USB cable. Reconnect USB cable and adjust the *Variable* knob to select which model (GDS-3000 or GDS-2000A) the demo board will be used for.

