

| | |
|---|--|
| Operating environment | Indoor use, pollution degree 2, altitude up to 2000 m (6562 ft.) |
| Operating temperature and humidity range | -40°C to 85°C (-40°F to 185.0°F) 80% RH or less (non-condensing) |
| Storage temperature and humidity range | -40°C to 85°C (-40°F to 185.0°F) 80% RH or less (non-condensing) |
| Standards | Safety: EN 61010 EMC: EN 61326 |
| Withstand voltage | 7.4 kV AC (sensed current: 1 mA) 50 Hz/60 Hz for 1 minute, between through window and cable output terminal |
| Protection against mechanical impacts | IK07 (energy level: 2 J, test height defined in EN 61010 Safety requirements: 400 mm) |
| Power supply | Supplied from PW8001, PW6001, PW3390, CT9555, CT9556, CT9557, U8977, or external DC power supply Rated supply voltage: ±11.5 V to ±15 V (Tracking) Maximum rated current: ±250 mA (200 A/55 Hz measurement, ±12 V power supply) |
| Maximum rated power | 6 VA (200 A/55 Hz measurement, ±12 V power supply) |
| Interface | Dedicated interface (ME15W) |
| Dimensions | Approx. 70W × 100H × 53D mm (2.76"W × 3.94"H × 2.09"D) (excluding protrusions and the cable) |
| Output cable length | CT6873: Approx. 3 m CT6873-01: Approx. 10 m |
| Mounting hole diameter | φ4.8mm (M4 screw, recommended tightening torque: 1.2 N•m to 1.5 N•m) |
| Weight | CT6873: Approx. 370 g (13.1 oz.) CT6873-01: Approx. 690 g (24.3 oz.) |
| Product warranty duration | 3 years |
| Accessories | Mark band ×6 Instruction Manual Operating Precautions (0990A907) |
| Options | CT9901 Conversion Cable CT9902 Extension Cable |
| Memory function | Sensor information can be read for products with memory function support. Applicable product: PW8001 |
| Rated current | 200 AAC/DC |
| Measurable conductor diameter | φ24 mm or less |
| Maximum input current | Not exceeding derating curve shown in Figure 1 However, a current of up to ±420 A peak (design value) is allowable for up to 20 ms at 40°C or less. |
| Output voltage | 10 mV/A |
| Maximum rated line-to-ground voltage | 1000 V (Measurement category III) Anticipated transient overvoltage: 8000 V |
| Output resistance | 50 Ω ±10 Ω |
| Accuracy guarantee conditions | Accuracy guarantee duration: 1 year Accuracy guarantee duration after adjustment made by Hioki: 1 year Accuracy guarantee temperature and humidity range: 23°C ±5°C (73°F ±9°F), 80% RH or less Warm-up time: at least 30 min Sine wave inputted, connected with measuring instrument with input resistance 1 MΩ ±10%, line-to-ground voltage: 0 V, no external magnetic field, conductor arranged at center of window |

Measurement accuracy

| Frequency | Amplitude ±(% of reading + % of full scale) | Phase |
|---------------------|--|-------------------|
| DC | 0.03% + 0.002% | - |
| DC < f < 16 Hz | 0.1% + 0.01% | ±0.1° |
| 16 Hz ≤ f < 45 Hz | 0.05% + 0.01% | ±0.08° |
| 45 Hz ≤ f < 66 Hz | 0.03% + 0.007% | ±0.05° |
| 66 Hz < f ≤ 100 Hz | 0.04% + 0.01% | ±0.1° |
| 100 Hz < f ≤ 500 Hz | 0.05% + 0.01% | ±0.15° |
| 500 Hz < f ≤ 3 kHz | 0.1% + 0.01% | ±0.4° |
| 3 kHz < f ≤ 5 kHz | 0.2% + 0.02% | ±0.4° |
| 5 kHz < f ≤ 10 kHz | 0.2% + 0.02% | ±0.5° |
| 10 kHz < f ≤ 1 MHz | (0.018 × f)% + 0.05% | ±(0.04 × f) ±0.1° |
| Frequency range | 10 MHz (±3 dB Typical) | - |

- The variable f in accuracy equations is expressed in kHz.
- Accuracy of amplitude and phase is specified with 110% of full scale input or less and not exceeding derating curve in Figure 1. Accuracy in range of DC < f < 10 Hz are design value.
- Add ±0.01% of reading to amplitude accuracy when input is 100% of full scale to 110% of full scale.
- For Model CT6873-01, add the following values to accuracy in the range of 1 kHz < f ≤ 1 MHz.
Phase accuracy: ±(0.015 × f)°

| | |
|---|---|
| Linearity error ^{*1 *2} | ±2 ppm Typical (23°C) |
| Offset voltage ^{*2} | ±5 ppm Typical (23°C, no input) |
| Amplitude error ^{*3} | DC: ±7 ppm Typical 10 Hz to 500 Hz: ±0.005% Typical 500 Hz to 3 kHz: ±0.01% Typical 3 kHz to 30 kHz: ±0.1% Typical 30 kHz to 100 kHz: ±0.4% Typical 100 kHz to 400 kHz: ±1% Typical 400 kHz to 1 MHz: ±3% Typical |

- *1: Measuring the output voltage while cycling the input current (DC) from +200 A → 0 A → -200 A → 0 A → +200 A at an interval of 40 A. Defined as the difference between the regression line calculated from the above measurements and the measurement points.
- *2: Defined as a percentage of the rated current.
- *3: DC error is defined as (linearity error + offset voltage).
AC error is defined as deviation from the 55 Hz measurement point.

| | |
|---|--|
| Output noise | 300 μV rms or less (≤ 1 MHz) |
| Effects of temperature | Within the range of -40°C to 18°C or 28°C to 85°C Amplitude sensitivity: ±15 ppm of reading/°C Offset voltage: ±0.1 ppm of full scale/°C |
| Effects of magnetization | 1 mA or less (input equivalent, after 200 A DC is inputted) |
| Common mode rejection ratio (CMRR) | 150 dB or more (DC to 1 kHz) 140 dB or more (1 kHz to 10 kHz) 120 dB or more (10 kHz to 100 kHz) 100 dB or more (100 kHz to 1 MHz) (Effect on output voltage / common-mode voltage) |
| Effects of conductor position | DC: ±0.004% of reading or less (input current: 50 A) 50 Hz/60 Hz: ±0.005% of reading or less (input current: 50 A) 1 kHz: ±0.04% of reading or less (input current: 50 A) 10 kHz: ±0.04% of reading or less (input current: 50 A) 100 kHz: ±0.8% of reading or less (input current: 10 A) When wire of outer diameter 10 mm is used |
| Effects of radiated radio-frequency electromagnetic field | 0.5% of full scale or less at 10 V/m |
| Effects of conducted radio-frequency electromagnetic field | 0.1% of full scale or less at 10 V |
| Effects of external magnetic field | 2 mA or less (input equivalent, under a magnetic field of 400 A/m, DC) 25 mA or less (input equivalent, under a magnetic field of 400 A/m DC or 400 A/m with 60 Hz) |

Connectable products

1. PW8001 Power Analyzer

-1. U7001 Combined accuracy

| Frequency | Current | Power | Phase |
|---|---|----------------|----------------------------------|
| | ±(% of reading + % of range) | | |
| DC | 0.05% + 0.052% | 0.05% + 0.052% | U7001 accuracy + sensor accuracy |
| 45 Hz ≤ f ≤ 66 Hz | 0.05% + 0.057% | 0.05% + 0.057% | |
| Bands other than DC and 45 Hz ≤ f ≤ 66 Hz | U7001 accuracy + sensor accuracy (Consider sensor rating for full scale error.) | | + sensor accuracy |

- For other measurement parameters, U7001 accuracy + sensor accuracy (consider sensor rating for full scale error).
- For the 4 A range or the 8 A range, add ±0.15% of range.
- Add accuracy according to each condition in specifications of the power analyzer and sensor.
- Defined after zero adjustment has been performed.

-2. U7005 Combined accuracy

| Frequency | Current | Power | Phase |
|---|---|----------------|----------------------------------|
| | ±(% of reading + % of range) | | |
| DC | 0.05% + 0.032% | 0.05% + 0.032% | U7005 accuracy + sensor accuracy |
| 45 Hz ≤ f ≤ 66 Hz | 0.04% + 0.027% | 0.04% + 0.027% | |
| Bands other than DC and 45 Hz ≤ f ≤ 66 Hz | U7005 accuracy + sensor accuracy (Consider sensor rating for full scale error.) | | + sensor accuracy |

- For other measurement parameters, U7005 accuracy + sensor accuracy (consider sensor rating for full scale error).
- For the 4 A range or the 8 A range, add ±0.15% of range.
- Add accuracy according to each condition in specifications of the power analyzer and sensor.
- Defined after zero adjustment has been performed.

2. PW6001 Power Analyzer

Combined accuracy

| Frequency | Current | Power | Phase |
|---|--|----------------|-----------------------------------|
| | ±(% of reading + % of range) | | |
| DC | 0.05% + 0.032% | 0.05% + 0.052% | PW6001 accuracy + sensor accuracy |
| 45 Hz ≤ f ≤ 66 Hz | 0.05% + 0.027% | 0.05% + 0.037% | |
| Bands other than DC and 45 Hz ≤ f ≤ 66 Hz | PW6001 accuracy + sensor accuracy (Consider sensor rating for full scale error.) | | + sensor accuracy |

- For other measurement parameters, add PW6001 accuracy + sensor (consider sensor rating for full scale error).
- For the 4 A range or the 8 A range, add ±0.15% of range.
- Add accuracy according to each condition in specifications of the power analyzer and sensor.
- Defined after zero adjustment has been performed.

3. PW3390 Power Analyzer

Combined accuracy

| Frequency | Current | Power | Phase |
|---|--|----------------|-----------------------------------|
| | ±(% of reading + % of range) | | |
| DC | 0.08% + 0.072% | 0.08% + 0.072% | PW3390 accuracy + sensor accuracy |
| 45 Hz ≤ f ≤ 66 Hz | 0.07% + 0.057% | 0.07% + 0.057% | |
| Bands other than DC and 45 Hz ≤ f ≤ 66 Hz | PW3390 accuracy + sensor accuracy (Consider sensor rating for full scale error.) | | + sensor accuracy |

- For other measurement parameters, PW3390 accuracy + sensor accuracy (consider sensor rating for full scale error).
- For the 4 A range or the 8 A range, add ±0.15% of range.
- Add accuracy according to each condition in specifications of the power analyzer and sensor.
- Defined after zero adjustment has been performed.

4. CT9555, CT9556, CT9557 Sensor Unit

Combined accuracy

- Sensor accuracy is applicable (with output coaxial cable of length 1.6 m or less).
- Add sensor unit accuracy when RMS output or total output is used.
- Add accuracy according to each condition in specifications of the products to be connected and sensor.

5. U8977 3CH Current Unit

Combined accuracy


- (U8977 accuracy) + (sensor accuracy)
- Add accuracy according to each condition in specifications of Memory HiCorder to be connected and sensor.
- Defined after zero adjustment has been performed.

6. 8971 Current Unit

Combined accuracy


- (8971 accuracy) + (sensor accuracy)
- Add accuracy according to each condition in specifications of Memory HiCorder to be connected and sensor.
- The 9318 Conversion Cable (accessory of 8971) and CT9901 are required.
- Defined after zero adjustment has been performed.

Figure 1. Frequency Derating Curve

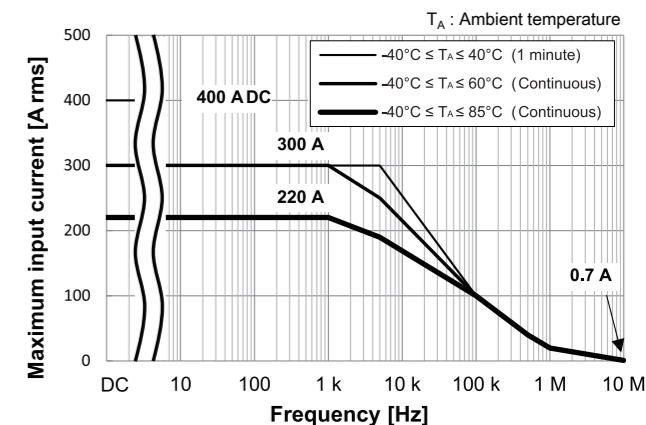


Characteristics

Frequency characteristics (Typical)

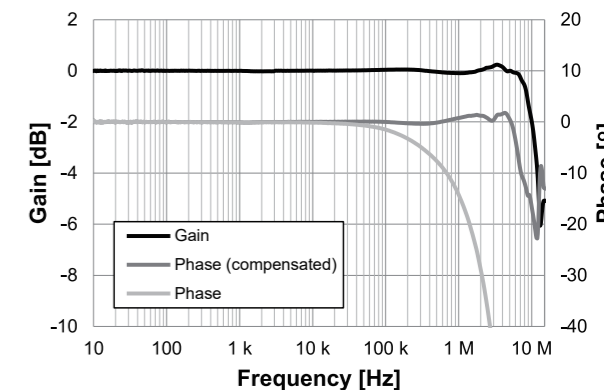

CMRR (Typical)

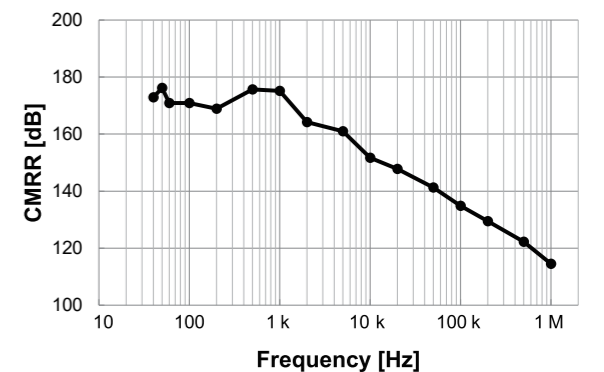

Linearity error (Typical)

