

Specifications

Accuracy

Reading (displayed value): Indicates the value displayed by the instrument. Limit values for reading errors are expressed in percent of the reading ("%" of reading" or "% rdg"). Range: Indicates the instrument's range. Limit values for range errors are expressed as a percentage of the range.

Full scale (rated current): Indicates the rated current. Limit values for full-scale errors are expressed as a percentage of full scale ("%" of full scale" or "% f.s.").

Operating environment	Indoor use, pollution degree 2, altitude up to 2000 m (6562 ft.)
Operating temperature and humidity range	0°C to 40°C (32°F to 104°F) 80% RH or less (non-condensing)
Storage temperature and humidity range	-10°C to 50°C (14°F to 122°F) 80% RH or less (non-condensing)
Dust resistance and water resistance	IP20 (EN 60529)
Standards	Safety: EN 61010 EMC: EN 61326 Class A
Power supply	Supplied from PW8001, PW6001, PW3390, CT9555, CT9556 or CT9557 Rated supply voltage: ± 11 V to ± 13 V (Tracking) Maximum rated current: ± 400 mA per channel or less (during 50 A/55 Hz measurement with ± 12 V power supply)
Interface	Dedicated interface (ME15W)
Dimensions	Approx. 430W × 88H × 260D mm (16.93"W × 3.46"H × 10.24"D)
Output cable length	Approx. 80 cm
Weight	PW9100A-3: Approx. 3.7 kg (130.5 oz.) PW9100A-4: Approx. 4.3 kg (151.7 oz.)
Product warranty duration	3 years
Accessories	Channel number stickers, colored labels (for channel identification), Instruction Manual, and Operating Precautions (0990A907)
Options	CT9901 Conversion Cable CT9902 Extension Cable (5 m)
Memory function	Sensor information can be read for products with memory function support. Applicable product: PW8001
Input and measurement method	Isolated input, DCCT input
Rated primary current	50 A AC/DC
Number of input channels	PW9100A-3: 3 channels, PW9100A-4: 4 channels
Maximum input current	Not exceeding derating curve (See Figure 1.) However, a current of up to ± 200 A peak (design value) is allowable for up to 20 ms.
Output voltage	2 V/50 A
Maximum output voltage	Approx. ± 12 V
Maximum rated line-to-ground voltage	1000 V (Measurement category II), 600 V (Measurement category III), Anticipated transient overvoltage 6000 V
Measurement terminals	Terminal block (with safety cover): M6 screws Proper torque: 2.5 N•m to 3 N•m
Input resistance (50 Hz/60 Hz)	1.5 mΩ or less
Input capacitance	Between measurement terminals and case (secondary side), 40 pF or less, defined at 100 kHz
Output resistance	50 Ω ± 2 Ω

Accuracy guarantee conditions
Accuracy guarantee duration: 1 year
Accuracy guarantee duration after adjustment made by Hioki: 1 year
Accuracy guarantee temperature and humidity range: 23°C ± 5 °C (73°F ± 9 °F), 80% RH or less
Warm-up time: at least 30 min
Sine wave inputted, connected with measuring instrument with an input resistance of 0.9 MΩ to 1.1 MΩ
line-to-ground voltage: 0 V

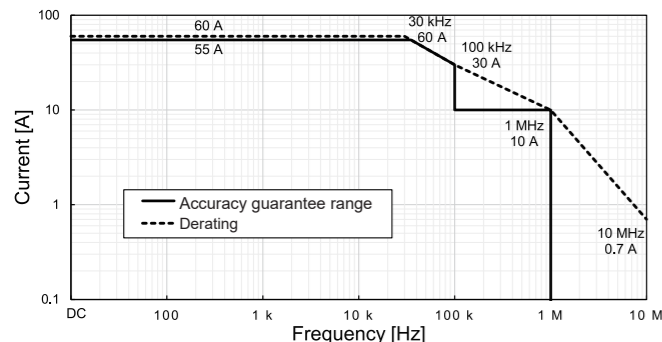


Figure 1. Frequency Derating (at 0°C to 40°C)

Measurement accuracy

Frequency	Amplitude		Phase
	\pm (% of reading + % of full scale)		
DC	0.02% + 0.007%		-
DC < f < 30 Hz	0.1% + 0.02%		$\pm 0.3^\circ$
30 Hz \leq f < 45 Hz	0.1% + 0.02%		$\pm 0.1^\circ$
45 Hz \leq f \leq 65 Hz	0.02% + 0.005%		$\pm 0.1^\circ$
65 Hz < f \leq 500 Hz	0.1% + 0.01%		$\pm 0.12^\circ$
500 Hz < f \leq 1 kHz	0.1% + 0.01%		$\pm 0.5^\circ$
1 kHz < f \leq 5 kHz	0.5% + 0.02%		$\pm 0.5^\circ$
5 kHz < f \leq 20 kHz	1% + 0.02%		$\pm 1^\circ$
20 kHz < f \leq 50 kHz	1% + 0.02%		$\pm(0.05 \times f)^\circ$
50 kHz < f \leq 100 kHz	2% + 0.05%		$\pm(0.06 \times f)^\circ$
100 kHz < f \leq 300 kHz	5% + 0.05%		$\pm(0.06 \times f)^\circ$
300 kHz < f \leq 700 kHz	5% + 0.05%		$\pm(0.07 \times f)^\circ$
700 kHz < f \leq 1 MHz	10% + 0.05%		$\pm(0.07 \times f)^\circ$
Frequency band	3.5 MHz (-3 dB Typical)		-

- The variable f in accuracy equations is expressed in kHz.
- Amplitude accuracy and phase accuracy are defined within the accuracy guarantee range shown in Figure 1, "Frequency Derating." However, design values are given for DC < f < 10 Hz.
- Add $\pm 0.01\%$ of reading to amplitude accuracy when input is 100% of full scale to 110% of full scale.
- When using the CT9902 Extension Cable (5 m), add the accuracy shown in the table below. Measurement bandwidth: 2 MHz (± 3 dB typical)
- Accuracy is not defined when 2 or more CT9902 are connected together.

Frequency	Amplitude		Phase
	\pm (% of reading)		
DC \leq f \leq 10 kHz	0.015%		None added
10 kHz < f \leq 50 kHz	0.015%		$\pm(0.02 \times f)^\circ$
50 kHz < f \leq 300 kHz	0.015%		$\pm(0.03 \times f)^\circ$
300 kHz < f \leq 700 kHz	2%		$\pm(0.03 \times f)^\circ$
700 kHz < f \leq 1 MHz	4%		$\pm(0.03 \times f)^\circ$

Output noise	300 μ V rms or less (≤ 1 MHz)
Effects of temperature	Within the range of 0°C to 18°C or 28°C to 40°C Amplitude sensitivity: ± 20 ppm of reading/°C Offset voltage: ± 1 ppm of full scale/°C Phase: $\pm 0.01^\circ/\text{°C}$
Effects of magnetization	5 mA or less (input equivalent, after ± 50 A is input)
Common mode rejection ratio (CMRR)	50 Hz/60 Hz: 120 dB or more 100 kHz: 120 dB or more (Effect on output voltage / common-mode voltage)
Effects of radiated radio-frequency electromagnetic field	0.5% of full scale or less at 10 V/m
Effects of external magnetic field	± 10 mA or less (under a magnetic field of 400 A/m DC or 400 A/m with 50 Hz/60 Hz)

Connectable products

1. PW8001 Power Analyzer

U7001 Combined accuracy

U7001 accuracy + sensor accuracy (consider sensor rating for full scale error).

Additional components should be added to the accuracy depending on the power analyzer and sensor specifications.

U7005 Combined accuracy

Frequency	Current		Power		Phase
	\pm (% of reading + % of range)				
DC	0.04% + 0.037%		0.04% + 0.037%		U7005 accuracy + PW9100A accuracy
45 Hz \leq f \leq 65 Hz	0.03% + 0.025%		0.03% + 0.025%		
Bands other than DC and 45 Hz \leq f \leq 65 Hz	U7005 accuracy + PW9100A accuracy (Consider sensor rating for full scale error.)				PW9100A accuracy

- For other measurement parameters, U7005 accuracy + PW9100A accuracy (consider sensor rating for full scale error).
- For the 1 A range or the 2 A range, add $\pm 0.12\%$ of full scale of the measurement range set on the U7005.
- Additional components should be added to the accuracy depending on the power analyzer and sensor specifications.

2. PW6001 Power Analyzer

Combined accuracy

Frequency	Current		Power		Phase
	\pm (% of reading + % of full scale) (full scale = PW6001 Range)				
DC	0.04% + 0.037%		0.04% + 0.057%		PW6001 accuracy + PW9100A accuracy
45 Hz \leq f \leq 65 Hz	0.04% + 0.025%		0.04% + 0.035%		
Bands other than DC and 45 Hz \leq f \leq 65 Hz	PW6001 accuracy + PW9100A accuracy (Consider sensor rating for full scale error.)				PW9100A accuracy

- For other measurement parameters, PW6001 accuracy + PW9100A accuracy (consider sensor rating for full scale error).
- For the 1 A range or the 2 A range, add $\pm 0.12\%$ of full scale of the measurement range set on the PW6001.
- Additional components should be added to the accuracy depending on the power analyzer and sensor specifications.

3. PW3390 Power Analyzer

Combined accuracy

Frequency	Current		Power		Phase
	\pm (% of reading + % of full scale) (full scale = PW3390 Range)				
DC	0.07% + 0.077%		0.07% + 0.077%		PW3390 accuracy + PW9100A accuracy
45 Hz \leq f \leq 65 Hz	0.06% + 0.055%		0.06% + 0.055%		
Bands other than DC and 45 Hz \leq f \leq 65 Hz	PW3390 accuracy + PW9100A accuracy (Consider sensor rating for full scale error.)				PW9100A accuracy

- For other measurement parameters, PW3390 accuracy + PW9100A accuracy (consider sensor rating for full scale error).
- For the 1 A range or the 2 A range, add $\pm 0.12\%$ of full scale of the measurement range set on the PW3390.
- Additional components should be added to the accuracy depending on the power analyzer and sensor specifications.

4. CT9555, CT9556, or CT9557 Sensor Unit

Combined accuracy

- For the CT9555, use the sensor accuracy. For the CT9556/CT9557, add $\pm 0.01\%$ of reading to the sensor accuracy (when the output coaxial cable is 1.6 m or less in length).
- Additional components should be added to the accuracy depending on the connected device and sensor specifications.

Phase Compensation Values

Enter the following compensation values (characteristic values) when performing phase compensation on the PW6001 or PW3390.

300 kHz, -2.80° (PW9100A-3, PW9100A-4 common)


The 300 kHz phase measured value noted in the test report can be used as the phase compensation value. In theory, using this value will allow more accurate measurement than is possible when using the representative value.

There's no need to enter compensation values for the PW8001 as that instrument reads sensor information from memory and performs compensation automatically.


To use the phase compensation function when using the CT9902, it is necessary to obtain calibration data for the combination of the device and the CT9902.

Characteristics

Frequency characteristics (Typical)

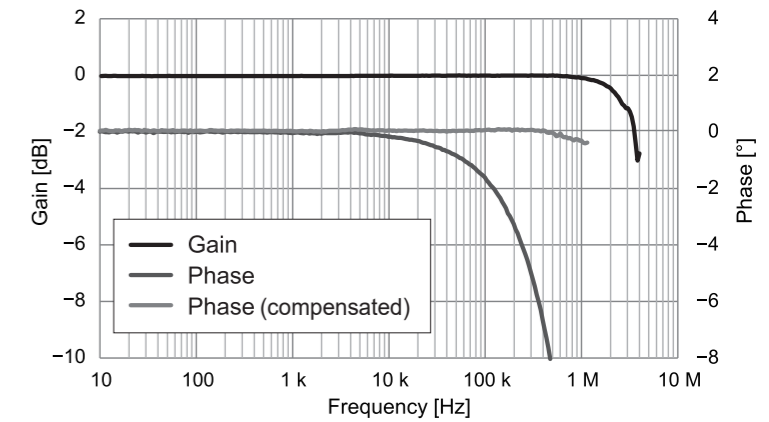

CMRR (Typical)

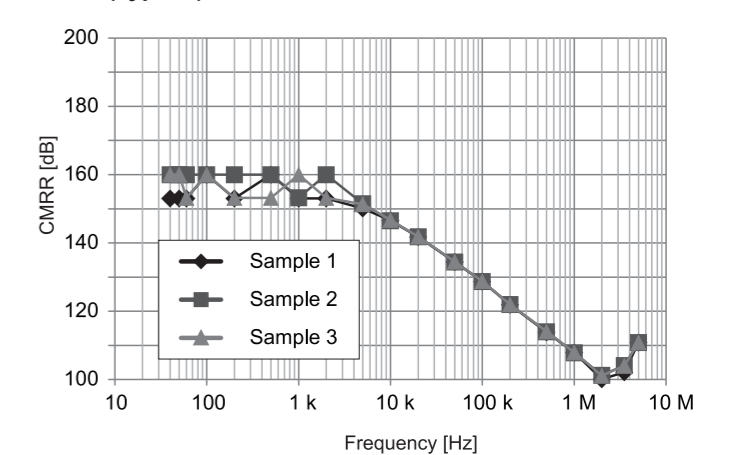

Rack Installation

You can remove the screws from the rear of the instrument and attach rack-mounting hardware. The rack-mounting hardware shown at the right is available on a special-order basis in both EIA and JIS variants. For more information, please contact your authorized Hioki distributor or reseller.



External dimensions

