



### Compatibility


- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

### Features

- 3X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 90° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

The HuddleCamHD 3X Wide is ideal for a small to medium sized meeting rooms. Comes standard with certified SONY lens

## HuddleCamHD

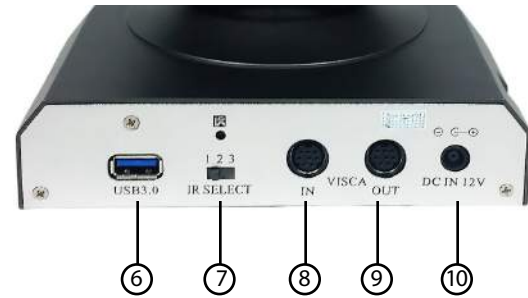

- Lens**  
3x Optical Zoom.
- IR Receiver**  
To receive IR remote controller signal.
- Power LED**  
Blue LED blinks when unit is powered,
- Standby LED**  
Orange LED blinks for Stand-By status.
- LCD Display**  
Information display for camera/firmware.
- USB 3.0 Interface**  
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).
- IR Selective Switch**  
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .
- VISCA IN Port**  
For hard wired remote control from a 3rd party PC, joystick, etc...
- VISCA OUT Port/RS485**  
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- DC IN 12V Socket**  
Only use the Power Adapter supplied with this camera.



### Specifications

Camera & Lens	
Video CMOS Sensor	1/2.8" CMOS, 2.0 Mega Pixel
Frame Rate	30fps 1920 x 1080p, 60fps 1280 x 720p
Lens Zoom	3X Optical Zoom 12X Digital Zoom f=3 9mm
Field of View	23°~90°
Min Lux	1.0 at F 1.2

What's in the Box
3X Zoom USB 3.0 Camera
12V/2.0A DC Power Adapter
(1) Ceiling Mount and Hardware
USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual (Downloadable online)

Pan/Tilt Movement

Pan Movement	±355°
Tilt Rotation	+125°
Presets	64 Presets

Rear Board Connectors

High Definition Interface	USB 3.0
Controller Signal Interface	Mini DIN-8 (VISCA IN, VISCA OUT/RS485)
Controller Signal Config.	IDip-Switch Pin 7/TTL Signal
Baud Rate	9600 bds
Power Supply Interface	DC 12V 2A


Electrical Index

Power Supply Adapter	12V DC 2A
Input Voltage	12V DC (10.5-14V DC)
Input Power	24W (Max)
Power Supply Max Temp	-14°F to 140°F

Physical

Material	Aluminum, Plastic
Dimensions	5.68"W x 6.38"H x 5.88"D (7.13" Height Ext)
(W x H x D) mm	139mm x 152mm x 165mm (5.88m Height Ext)
Camera Weight	2.10 lbs (.95 kg)
Box Dimensions	13.25"x9.25"x9.5" (336mm x 234mm x 241mm)
Boxed Weight	5.45 lbs   2.47 kg
Temperature	32°F to + 113°F
Color	Silver Gray

Remote Control

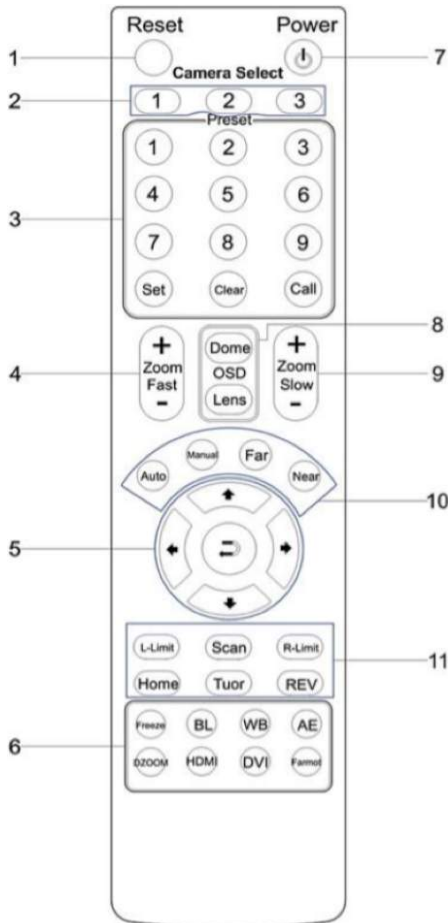

- Reset**  
Restarts the camera and restores it to Factory Default settings. (Note: Will delete all memory).
- Camera Selection**  
Select Camera ID: 1, 2 or 3
- Preset Positions**  
1-9: Preset Positions  
Set: Setting Preset Position  
Clear: Clear Preset Position  
Call: Call Preset Position  
Note: If you want to set (or call) the first preset position to 1, you should press number key "1", then press "Set" (or "Call") to set (call) the position.
- Fast Zoom in/out Control Zone**  
+ : Zoom in quickly  
- : Zoom out quickly
- Pan/Tilt Controller**  
  - ↑ Move Up
  - ↓ Move Down
  - ← Move Left
  - Move Right
  - ↻ Auto Pan
- Additional Function Zone**  
 Freeze: Image Freeze  
 BL: Back-light Compensation  
 WB: White Balance  
 AE: Auto Exposure  
 D Zoom: Digital Zoom  
 HDMI: Swap to HDMI video output  
 DVI: Swap to DVI video output  
 Format: Swap between different formats
- Power Supply Switch**  
Switch for turning camera on (i.e. Stand-By mode vs. Working mode)
- OSD Menu Zone**  
Dome OSD: Enter Pan Tilt Zoom OSD menu  
Lens OSD: Enter lens OSD menu
- Slow Zoom In/Out Zone**  
+ : Zoom in slowly  
- : Zoom out slowly
- Focus Control Zone**  
Auto: Turn on auto focus  
Manual: Turn on manual focus  
Far: Set focus at farther distance  
Near: Set focus at nearer distance
- Pan/Tilt Function Zone**  
L-Limit: Set left boundary limit scanning position  
Scan: Enable Boundary Scanning (Auto Panning)  
R-Limit: Set right boundary limit scanning position  
Home: Go to camera's Home position  
Tour: Enable automatic patrol tour of presets  
Rev: Enable image flip for ceiling mounting

Still have questions?  
Give us a call.