


IN555x-series Remote IR codes

Table		Table 0 (default)		Table 1	
Key No.		Code	Function Key	Code	Function Key
1	K22	0x90	ON	0x90	ON
2	K26	0x91	OFF	0x91	OFF
3	K23	0xB6	FOCUS +	0xB6	FOCUS +
4	K20	0xB7	ZOOM +	0xB7	ZOOM +
5	K19	0xB8	TEST PATERN	0xB8	TEST PATERN
6	K24	0xB9	FOCUS -	0xB9	FOCUS -
7	K27	0xBA	ZOOM -	0xBA	ZOOM -
8	K18	0xBB	LENS SHIFT	0xBB	LENS SHIFT
9	K17	0xC1	UP	0xC1	UP
10	K25	0xC3	LEFT	0xC3	LEFT
11	K12	0xC4	RIGHT	0xC4	RIGHT
12	K16	0xC5	ENTER	0xC5	ENTER
13	K40	0xC2	DOWN	0xC2	DOWN
14	K33	0x87	MENU	0x87	MENU
15	-	-	-	-	-
16	K15	0xBC	EXIT	0xBC	EXIT
17	K34	0x83	INPUT	0x83	INPUT
18	K41	0x98	PICTURE	0x98	PICTURE
19	K13	0x8C	NETWORK	0x8C	NETWORK
20	K21	0x86	AUTO SYNC	0x61	1
21	K39	0x9F	ASPECT	0x62	2
22	K11	0x8F	PIP	0x63	3
23	K31	0xBD	OVERSCAN	0x64	4
24	K38	0x8E	FREEZE	0x65	5
25	K10	0x8B	LAMP Mode	0x66	6
26	K30	0xBE	-	0x67	7
27	K37	0xBF	INFO	0x68	8
28	K9	0x9E	LIGHT	0x69	9
29	K29	0x9A	CLEAR	0x9A	CLEAR
30	K36	0x9B	SHUTTER	0x60	0
31	K8	0x9C	ID SET	0x9D	ID SET

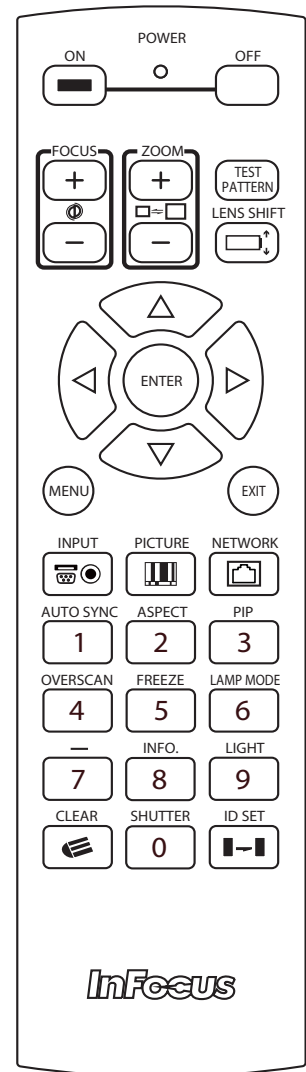

Special Code	NEC Code	Function Key	NEC Code	Function Key
ID_SET + MENU	0x6C	Table0	0x6C	Table0
ID_SET + MENU	0x6E	Table1	0x6E	Table1
ID_SET + No.	0x6D	N-sets	0x6D	N-sets
ID_SET + CLEAR	0x6F	ID set clear	0x6F	ID set clear