

RO/ROV Series Wall Ovens



Millennia® Wall Oven Handle Kit, PN AROVH30S

INSTALLATION INSTRUCTIONS

WARNING:


- Replace the door handle only when the oven is cool.
- Failure to clamp the door assembly as specified will result in the door glass separating or falling and damage to the door.
- Use only the screws included to attach the new handle to the oven door. Otherwise, installation or fit problems may occur.

Tools and Materials Required


The following items are not provided with the kit and are required for proper installation.

- 2 padded “C” clamps or equivalent

Parts Included




Torx head screws
(2), PN 83688



Millennia handle spacers (2),
PN 92009



Millennia style handle (PN 72937-01)




T-20 Torx wrench
PN 92350




Thread-locker
(1 packet)
PN 92351

STEP 1 Open the oven door to the horizontal position.

STEP 2: To prevent damage to the door and door glass, pad and clamp both sides of the door three (3) inches from the top edge. Doing so will prevent the door from coming apart when you remove the handle screws.

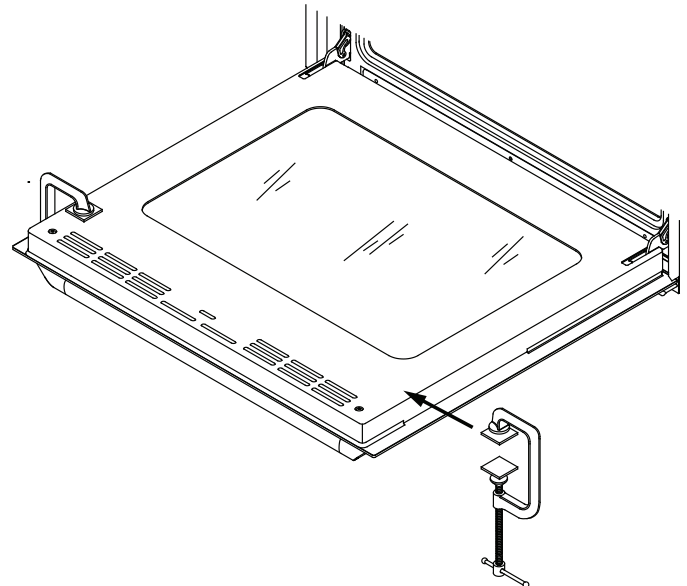

- STEP 3** Grasp the handle with one hand and remove and discard the two (2) Torx head screws that hold it in place using the included Torx wrench.

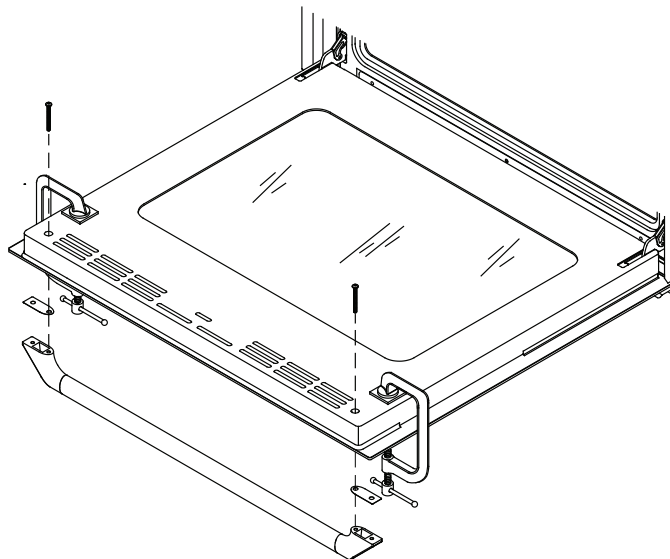


- STEP 4** Remove the protective backing from the handle spacers (provided) and press them into place on the mounting surfaces of the new handle as shown.

- STEP 5** Place one (1) drop of thread-locker (provided) into each of the two thread-holes in the new handle.

- STEP 6** Line up the screw holes on the new handle with the mounting holes on the oven door as shown.

- STEP 7** Thread the two (2) new screws from the kit into the handle and tighten into place. **IMPORTANT: DO NOT** use screws other than the Torx head screws included. **DO NOT** over-tighten the screws to prevent damage to the door or the door finish.

- STEP 8** Remove the clamps from the door.

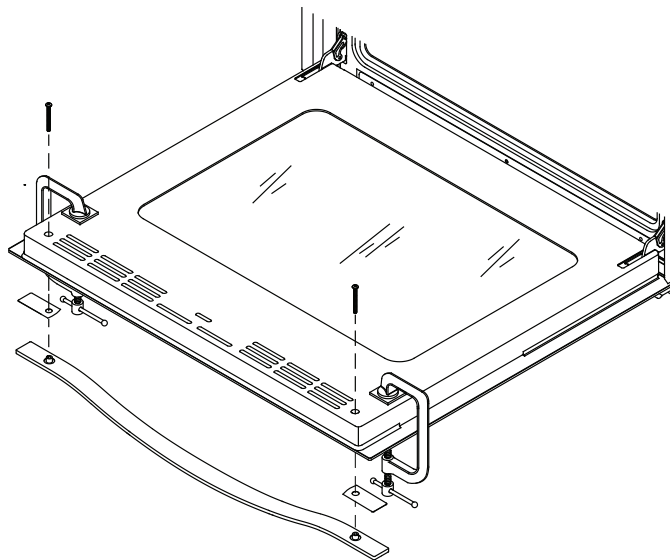

dacor
The Life of the Kitchen.®