
Ventilation Guidelines: Wine-mate Self-Contained Cooling Units

Your cellar must be properly insulated and vapor sealed in order for these units to function properly. Place the unit in a properly ventilated location. If it is not, heat exhausted by the condensing unit will build up and the cooling system will not operate properly.

Model Number		
WM-4510HZD	WM-1500HZD	
WM-1500CD	WM-2500HZD	
WM-2500CD	WM-3500HZD	To allow for proper ventilation, please allow a 36" clearance at the front of the unit (cold air intake) as well as 36" clearance at the rear of the unit (hot air exhaust).
WM-1500-HTD	WM-4500HZD	
WM-1500-HTD- TE	WM-6500HZD	
WM-2500-HTD	WM-8500HZD	
WM-2500-HTD- TE	WM-2520HZD	
	WM-4520HZD	
	WM-8520HZD	

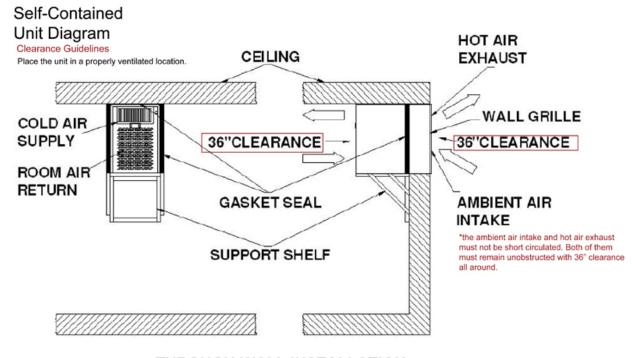


THROUGH-WALL INSTALLATION

Self-Contained Unit Diagram

Clearance Guidelines

Place the unit in a properly ventilated location.

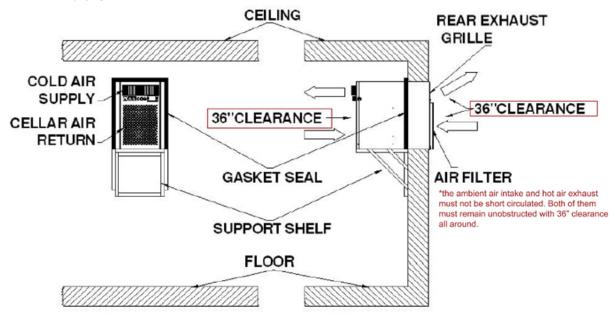

Flush to the outside of wall with air filter & rear exhaust grille