

AD-12 Passive Antenna Divider | Combiner

Key Features




- The AD-12 can either divide a RF signal into 2 signal outputs or combine 2 signals into 1 signal output. Simultaneously, it transmits bias voltage to afterward boosters. This is an ideal accessory to set up antenna systems.
- The AD-12 adapts an isolated grounding design to avoid power noise from multi-receiver operation.

Technical Specifications

Frequency Range	470~1000MHz
Attenuation	3.5dB (typical)
Isolation	20dB (typical)
Impedance	50Ω
Max Volt/Current	50VDC 1.5A
Connector	TNC×3
Dimensions	90.3(W)×25(H)×55.4(D)mm 3.5(W)×1(H)×2.2(D)"
Weight	105g 3.7oz

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

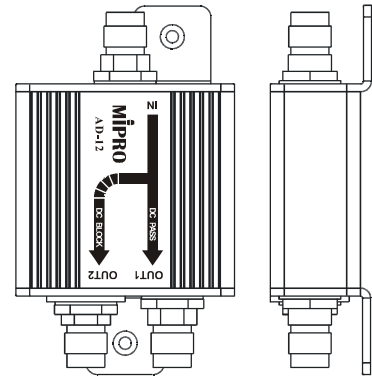

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw