

# MEDIA CONTROL MIXER

Models: MC4 / MC4BT / MC4D

Mic/Line Audio Mixer which fits in a Two Gang Electrical Box. Includes 15V DC, 3.5A, UL Listed, Level **V** (Energy Star) Power Supply.

## Models:

MC4 - Standard Features

MC4BT - with Bluetooth Feature and Toslink

MC4D - with Toslink Input


For Classrooms, Showrooms, Conference Rooms and Retail.



Gangbox Not Included



UL Listed, Efficiency Level **V** (Energy Star) 15V DC Power Supply

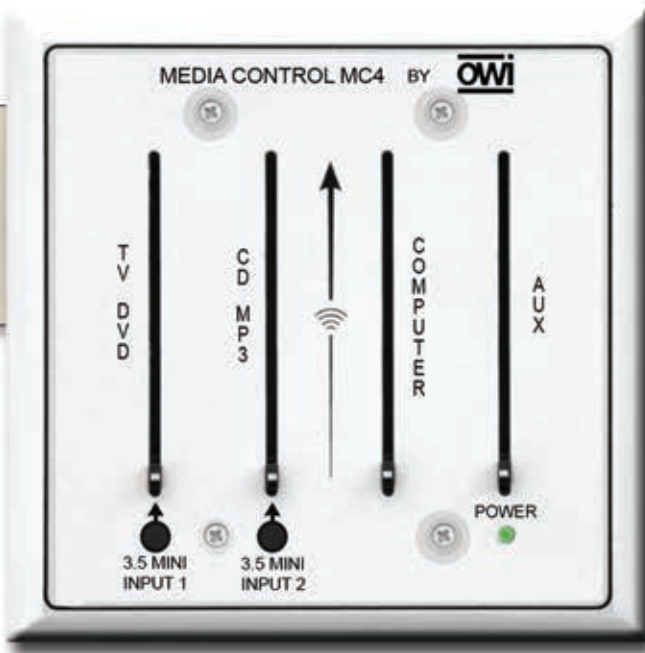

## Media Control Mixer – MC4 / MC4BT / MC4D

- 6 Inputs Total – 4 Each Back Panel /
- Selectable Line or Mic Level Inputs on Three
- Two Each 3.5 Mini Front Inputs

- Four Sets of Slider Level Controls for Easy Mix
- Always "ON" Page System
- Balanced Line Outputs

- RJ45/CAT 5 Connectivity
- 15V DC, UL Listed, Efficiency Level **V** (Energy Star) Power Supply
- Selectable Override for Toslink or Bluetooth

## Models:

MC4 - Standard Features

MC4BT - with additional Bluetooth Feature and Toslink

MC4D - with additional Toslink Input



OWI-INC.COM  
MC4



# MEDIA CONTROL MIXER

Models: MC4 / MC4BT / MC4D

Mic/Line Audio Mixer which fits in a Two Gang Electrical Box. Includes 15V DC, 3.5A, UL Listed, Level 5 (Energy Star) Power Supply.

Models:

- MC4 - Standard Features
- MC4BT - with Bluetooth Feature and Toslink
- MC4D - with Toslink Input

For Classrooms, Showrooms, Conference Rooms and Retail.

The MC4 will allow either Line or Mic level inputs on each channel. It has an additional four sets of level controls to provide a fixed secondary output not effected by any of the changes on the front panel level input controls.

Typical use of the secondary output would be "Hard of hearing." All inputs and outputs are balanced so that, if needed, very long input lines and output lines are possible.

## MC4 CARTON INCLUDES:



- One (1) Each MC4
- One (1) Each 15V DC, UL Listed, Efficiency Level 5 (Energy Star) Power Supply
- Four (4) Each 6:32 Truss Head Screws
- Four (4) Each Plastic Washers

GENERAL SPECS	MC4 / MC4BT / MC4D
Description:	Mic/Line Audio Mixer that fits in a Two Gang Electrical Box
Power:	15V DC @ 170 ma
Channels:	Four (4) Channels Plus a "Wild" Input
Voltage Levels:	Line (-14 to +4 dBm), Mic (-55 dBm)
Outputs:	Two (2) Outputs
Output Types:	Balanced, Solid State
Output Channels:	Two (2) BAC on Euro Block/1 ea. CAT 5 (CH 1)
Output Types:	Primary, Front Panel Controlled/Secondary Rear
Input Types:	2 ea. Front Panel 3.5 mm 4 ea. Rear Panel Fixed Wire (Euro Block) 1 ea. "Wild" Line, Unbalanced Input
Mic/Line Inputs	Channels 3 and 4, IC or Line Selected on Rear

\*Models:


- MC4 - Standard Features enumerated above
- MC4BT - Standard Features plus Bluetooth and Toslink
- MC4D - Standard Features plus Toslink Input

## MC4 WIRING DIAGRAM

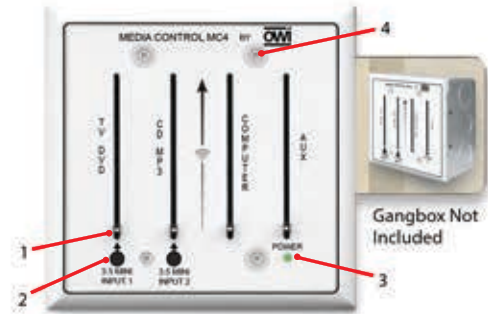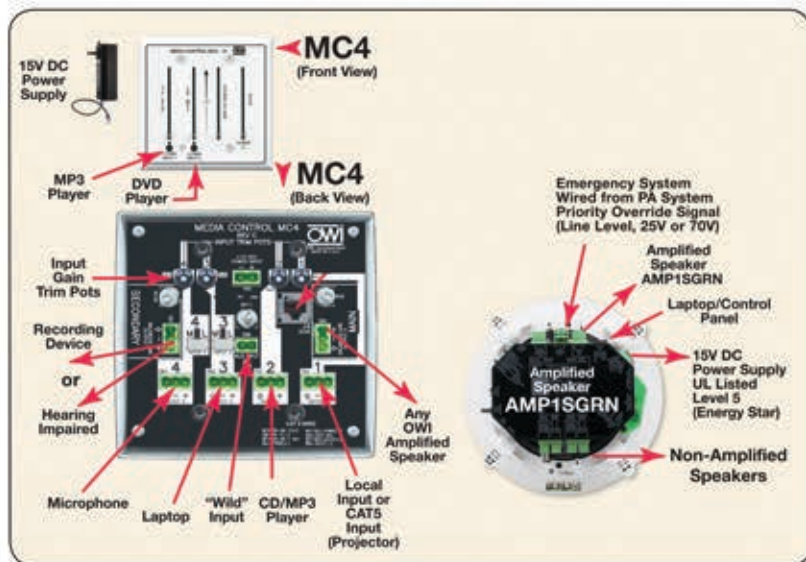

## MC4 – Front Panel Features:

- 1 Four Sliders (Line Level or Mic Level Inputs)
- 2 Two 3.5 Mini Input Jacks (Channels 1 and 2) Jacks are Stereo and Combine to Mono at the Jack. They Can Be Selected on Rear Panel.
- 3 LED Power Indicator
- 4 Four Screws/Washers

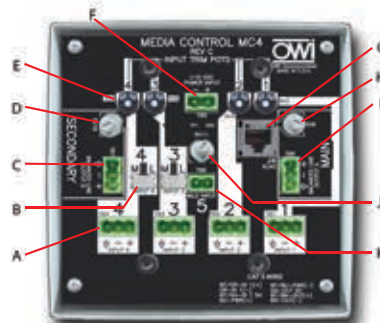


## MC4 – Back Panel Features:

- A Four (4 ea.) Inputs – Euro Style Three Pin Connectors for Inputs 1, 2, 3 & 4.
- B Two (2 ea.) Mic or Line Switches for Inputs 3 & 4
- C Balanced Line Output B (Secondary)
- D Volume Control for the Secondary Output B
- E Four (4 ea.) Trim Controls for Inputs 1, 2, 3 & 4
- F 15V DC Power Input
- G RJ45/CAT 5
- H Volume Control for the Main Output A
- I Balanced Line Output A (Main)
- J Volume Control for the "Wild" Input
- K "Wild" Input

## RECOMMENDED OWI SPEAKERS

- A) AMP1SGRN, AMP-R2SIC5/SIC6, AMP-BT2SIC5/SIC6
- B) AMP602, AMPLV602, AMP-BT-602-1
- C) 2X2AMP-R2S61, 2X2AMP-BT2S61
- D) 2X2FG-R2S61, 2X2FG-BT2S61
- E) 2X2PB-R2S61, 2X2PB-BT2S61

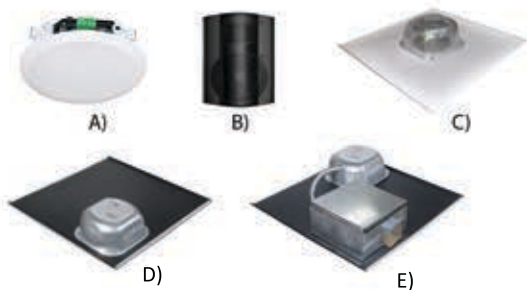

OWI, Inc.

17141 Kingsview Ave.  
Carson, CA 90746 USA

ph. 310.515.1900  
toll free 800.638.1694  
fax 310.515.1606

email info@owi-inc.com  
web www.owi-inc.com