

### WALL MOUNT SOLUTIONS INSTALL GUIDE



8 SHELF LOCKING WALL MOUNT  
16 SHELF LOCKING WALL MOUNT  
18 SHELF LOCKING WALL MOUNT

## ✓ INSTALLING SHELVES

1. Take shelves out of packaging. Starting with the bottom of the tower insert shelves into slots.



2. As you attach each shelf, starting from the bottom, insert the provided carriage bolts.

*IMPORTANT~ Do NOT put carriage bolts into top shelf at this time*

*NOTE: Make sure the shelf with locking mechanism is placed in the following position:*

- ▶ 8 shelf locking unit - 4th position from top
- ▶ 16 shelf locking unit - 8th position from top
- ▶ 18 shelf locking unit - 9th position from top



3. Remove side strip from packaging, with the cutout side at the bottom, insert side strip through all shelves. Threaded knobs should be facing inward.

4. Place short screws through shelves into side strips on the middle and bottom shelves. *IMPORTANT Do NOT tighten these screws fully*



5. Repeat step 3 & 4 with second side strip.

6. Place top cover on and install long screws in both sides loosely. Install carriage bolts through the top cover, shelf and spine.

7. Tighten all fasteners



## ✓ INSTALLING LOCKING DOOR

8. Place metal spacer on hinge and install hinge in front holes on side strips. Install hinge opposite the side your devices charging port. Once inserted tighten nuts. *!IMPORTANT - extra pressure may be needed to insert hinges.*



9. Open hinges fully and place door onto studs. Tighten nuts.

## ✓ CABLE MANAGEMENT


10. Place PowerGistics wall mount tower on its side. Route cable ties through holes from inside out, every other hole alternating sides



11. String charging cable through holes opposite the locking door and out to the end of the shelf. Leaving roughly 9 inches from the end of the shelf hole, so you can connect to charging port in device.



11.5 Place device on shelf and plug charging cable in. Adjust length accordingly

12. Make a slight bend in cable near back of shelf and slip over eyelid 



13. In the back of the tower insert power supply & tighten cable tie. Plug in power supply to surge bar in tower.





205 Westwood Ave, Long Branch, NJ 07740  
 Phone: 866-94 BOARDS (26273) / (732)-222-1511  
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

## LOCKING WALL MOUNT

14. Before filling tower with devices move tower to section of wall where it is to be mounted. Hold tower firmly against wall with the base snug against the wall and sitting directly on the floor. Take a pencil and fill in the slotted hole.


**!!IMPORTANT! - CHECK SURGE BAR TO MAKE SURE POWER SWITCH IS IN ON POSITION**

15. Remove tower from wall and use drywall/wood/concrete or other specific material screw/anchors. Drill screw into wall half way without wall tower. Once both side screws are set, hang wall tower slots over the screws. Tighten fasteners.

*!!IMPORTANT - Make sure power cord is run through the bottom of the tower in the cut out.*

16. Finally, plug main powercord directly into wall.

*!!IMPORTANT - DO NOT plug PowerGistics wall tower into a surge bar, only direct into wall outlet.*

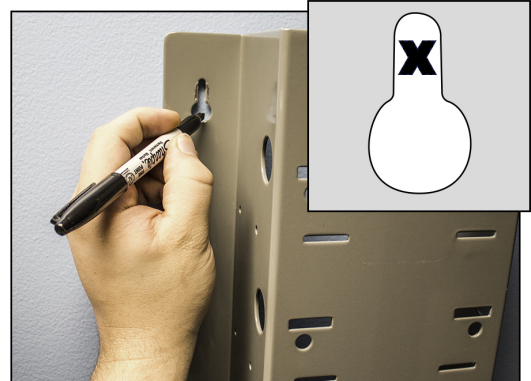


38 - Carriage Bolts  
 38 - Zinc Washers  
 38 - Zinc Lock Nut




10 - Hinge Nuts



1 - Power Strip Information

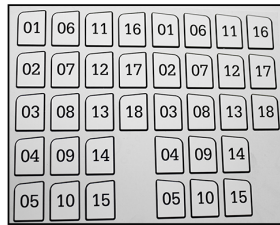

1 - Decal Set

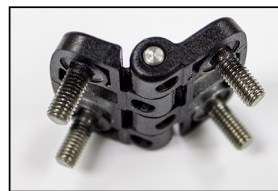

2 - Hinge



20 - Cable Ties



6 - Long Screws  
 10 - Short Screws

## PARTS INCLUDED



2 - Hinge Spacer



2 - Locking Door Keys

## Tools Required

- 7/16 wrench
- Drill bit, drill, hardware to attach to wall
- Phillips screwdriver
- 8mm wrench