


Hub Type

Images

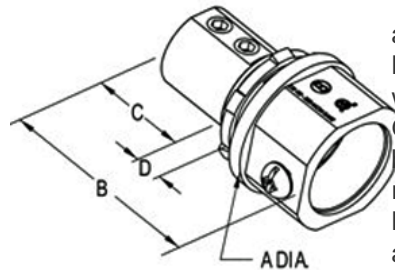

Application

The MCH-075 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-075 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-075 and MCH-100 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Not for use in concentric knock-out (K.O.) Patent Pending

Product Information

Material: Brass

Certifications & Codes:

Federal

Specification Number: A-A-50553A

NEMA

Standard: FB-1

UL File

Number: Listed ETL under Bridgeport Fittings: MCH-075. Conforms to UL 467 and CSA C22.2 No. 18.3

UL

Standard: 467

UNSPSC: 39121613

Patent

Number: 8,410,378; D703,519

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 1.68

Dimension B in Inches: 2.06

Dimension C in Inches: .56

Dimension D in Inches: .46

Catalog ID: MCH-075

UPC Number: 78174702345

Description: 3/4" Brass Alloy grounding fitting with stainless steel set screws and steel locknut Buna N sealing ring. NPT threads

Application: The MCH-075 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-075 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-075 and MCH-100 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Not for use in concentric knock-out (K.O.) Patent Pending

Trade Size: 3/4"

Std Pkg Qty: 40

Unit Qty: 10