

CON-24V-12V
AC to DC 12V Power Converter



RoHS CE FC 


Introduction

The Triplet CON-24V-12V is a power converter that allows DC powered camera to be powered by AC.

Features

- Converts AC/DC to DC 12V 2A.
- Supports AC 18V to 26V or DC 18V to 36V power input.
- Built-in 2-pin terminal block at both ends.

Installation View

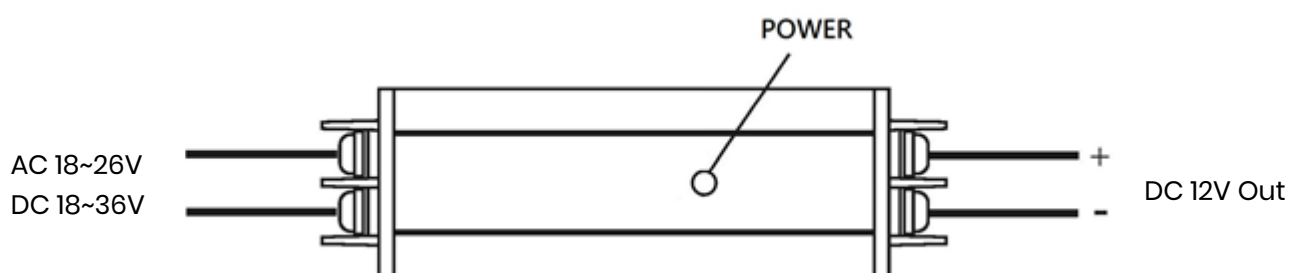

LED Indication

LED	LED Color	Description
POWER	GREEN ON	Power On

Caution

- Please pay attention to the power input and output connection.
- The power connection between the positive and negative must be correct to avoid the product damage.

Specification

ITEM NO.	CON-24V-12V
Support	
Input Power	AC 18~26V/ DC18~36V
Output Power	DC12V Regulated
Output Current	2000mA (Max)
Ports & Interfaces	
Power Input	1 x 2-pin Terminal Block
Power Output	1 x 2-pin Terminal Block
Ambient Temperature	
Operation	-40 to 85°C
Storage	-50 to 95°C
Humidity	Up to 95%
Physical Characteristics	
Dimensions	102.8 x 25.4 x 25.4mm
Weight	75g

Warranty

Triplett / Jewell Instruments extends the following warranty to the original purchaser of these goods for use. Triplett warrants to the original purchaser for use that the products sold by it will be free from defects in workmanship and material for a period of (1) one year from the date of purchase. This warranty does not apply to any of our products which have been repaired or altered by unauthorized persons in any way or purchased from unauthorized distributors so as, in our sole judgment, to injure their stability or reliability, or which have been subject to misuse, abuse, misapplication, negligence, accident or which have had the serial numbers altered, defaced, or removed. Accessories, including batteries are not covered by this warranty

Copyright © 2022 Triplett

www.triplett.com