

FEATURES


- Got Nail™ bar hangers
- Pass-N-Thru™ tool-less shortening of bar hangers
- Thermally protected
- Die-formed housing and plaster frame
- Housing may be removed from plaster frame for junction box access
- NM cable pry-outs and conduit knockouts in junction box

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL/cUL Listed - Wet Location, UL/cUL Listed - Damp Location, UL/cUL Listed 1598 Luminaire, UL/cUL Listed for Feed Through, IP Rated



8-INCH SQUARE INCANDESCENT NEW CONSTRUCTION NON - IC

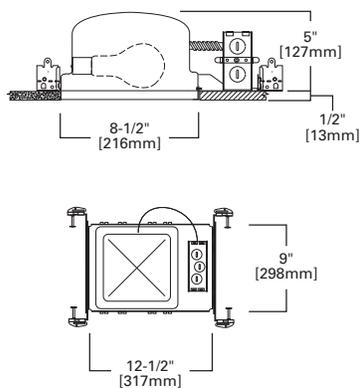

H1T

ORDERING INFORMATION: ORDER HOUSING AND TRIMS SEPARATELY^A

SAMPLE NUMBER: H1T - 10P

Housing	Trims	Accessories
H1T=8" Square Aperture, New Construction, Non-IC, 120V Line Voltage	<p>Lenses and Diffusers</p> <p>10 Albalite Lens, 100W A19, OD: 9-3/8" [238mm] Square 10P=White Trim with Albalite Glass Lens 10PS=White Trim with Albalite Glass Lens, Wet Location listed Showerlight</p> <p>110 Albalite Glass Diffuser Showerlight, 100W A19, OD: 9-3/8" [238mm] Square 110P=White Trim with Frosted Glass Diffuser</p> <p>113 Fresnel Splay, 100W A19, OD: 9-3/8" [238mm] Square 113P=White Splay Trim with Fresnel Glass Lens</p> <p>11GP Drop Diffuser, 100W A19, OD: 9-3/8" [238mm] Square 11GP=White Trim with Glass Drop Diffuser</p> <p>13 Fresnel Lens, 100W A19, OD: 9-3/8" [238mm] Square 13P=White Trim with Fresnel Glass Lens 13PS=White Trim with Fresnel Glass Glass Lens, Wet Location Listed, Showerlight</p> <p>15 All Glass Diffuser, 100W A19, OD: 9-3/8" [238mm] Square 15=All Glass Frosted Diffuser</p>	<p>Transformer</p> <p>H277=Steps 277V Line Voltage Down to 120V Fixture Operating Voltage, 300VA max., for Use with Non-IC Housings</p>

NOTES: ^A UL/cUL Listed for Wet Location with select trims.

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.

8-INCH SQUARE INCANDESCENT NEW CONSTRUCTION ICAT





H11C

FEATURES

- Got Nail™ bar hangers
- Pass-N-Thru™ tool-less shortening of bar hangers
- AIR-TITE™
- Thermally protected
- Die-formed housing and plaster frame
- Housing may be removed from plaster frame for junction box access
- NM cable pry-outs and conduit knockouts in junction box

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL/cUL Listed - Wet Location, UL/cUL Listed - Damp Location, UL/cUL Listed 1598 Luminaire, UL/cUL Listed for Feed Through, UL/cUL Listed for Insulation Contact, IP Rated, AIR-TITE™ Certified ASTM E283

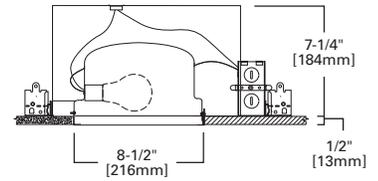

ORDERING INFORMATION: ORDER HOUSING AND TRIMS SEPARATELY^Δ

SAMPLE NUMBER: H11C - 10P

Housing	Trims
H11C=8" Square Aperture, New Construction, IC AIR-TITE™, 120V Line Voltage	<p>Lenses and Diffusers</p> <p>10 Albalite Lens, 60W A19, OD: 9-3/8" [238mm] Square 10P=White Trim with Albalite Glass Lens 10PS=White Trim with Albalite Glass Lens, Wet Location listed Showerlight</p> <p>110 Albalite Glass Diffuser Showerlight, 60W A19, OD: 9-3/8" [238mm] Square 110P=White Trim with Frosted Glass Diffuser</p> <p>113 Fresnel Splay, 60W A19, OD: 9-3/8" [238mm] Square 113P=White Splay Trim with Fresnel Glass Lens</p> <p>11GP Drop Diffuser, 60W A19, OD: 9-3/8" [238mm] Square 11GP=White Trim with Glass Drop Diffuser</p> <p>13 Fresnel Lens, 60W A19, OD: 9-3/8" [238mm] Square 13P=White Trim with Fresnel Glass Lens 13PS=White Trim with Fresnel Glass Glass Lens, Wet Location Listed, Showerlight</p> <p>15 All Glass Diffuser, 60W A19, OD: 9-3/8" [238mm] Square 15=All Glass Frosted Diffuser</p>

NOTES: Δ Not to be used in direct contact with spray foam insulation. Δ UL/cUL Listed for Wet Location with select trims.

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.


8-INCH SQUARE COMPACT FLUORESCENT NEW CONSTRUCTION NON - IC

FEATURES


- Got Nail™ bar hangers
- Pass-N-Thru™ tool-less shortening of bar hangers
- Compact fluorescent with thermally protected electronic ballast
- Die-formed housing and plaster frame
- Housing may be removed from plaster frame for junction box access
- Electronic ballast 120V - 277V, HPF

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL/cUL Listed - Wet Location, UL/cUL Listed - Damp Location, UL/cUL Listed 1598 Luminaire, UL/cUL Listed for Feed Through

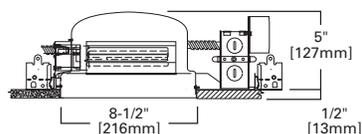

H1EF



ORDERING INFORMATION: ORDER HOUSING AND TRIMS SEPARATELY^A

SAMPLE NUMBER: H1EF - 10P

Housing	Trims
<p>H1EF=8" Square Aperture, New Construction, Non-IC, Compact Fluorescent, (2) 18W DTT CFL</p>	<p>Lenses and Diffusers 10 Albalite Lens, (2) 18W DTT, OD: 9-3/8" [238mm] Square 10P=White Trim with Albalite Glass Lens 10PS=White Trim with Albalite Glass Lens, Wet Location listed Showerlight</p> <p>110 Albalite Glass Diffuser Showerlight, (2) 18W DTT, OD: 9-3/8" [238mm] Square 110P=White Trim with Frosted Glass Diffuser</p> <p>113 Fresnel Splay, (2) 18W DTT, OD: 9-3/8" [238mm] Square 113P=White Splay Trim with Fresnel Glass Lens</p> <p>11GP Drop Diffuser, (2) 18W DTT, OD: 9-3/8" [238mm] Square 11GP=White Trim with Glass Drop Diffuser</p> <p>13 Fresnel Lens, (2) 18W DTT, OD: 9-3/8" [238mm] Square 13P=White Trim with Fresnel Glass Lens 13PS=White Trim with Fresnel Glass Glass Lens, Wet Location Listed, Showerlight</p> <p>15 All Glass Diffuser, (2) 18W DTT, OD: 9-3/8" [238mm] Square 15=All Glass Frosted Diffuser</p>

NOTES: ^A UL/cUL Listed for Wet Location with select trims. ^Δ DTT = Double Twin Tube Compact Fluorescent Lamp.

Housing	Wattage	Voltage	CFL Lamp Type (lamp by others)	Generic Lamp Designation	Socket	Ballast	Lamp
H1EF	(2) 18W	120V-277V	DTT (Double Triple Tube)	CFQ18W/G24q	G24q-2 (4-pin)	Electronic	Not included

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.

8-INCH SQUARE COMPACT FLUORESCENT NEW CONSTRUCTION ICAT




H1EFICAT

FEATURES

- Got Nail!™ bar hangers
- Pass-N-Thru™ tool-less shortening of bar hangers
- AIR-TITE™
- Compact fluorescent with thermally protected electronic ballast
- Die-formed housing and plaster frame
- Housing may be removed from plaster frame for junction box access
- Electronic ballast 120V - 277V, HPF

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL/cUL Listed - Wet Location, UL/cUL Listed - Damp Location, UL/cUL Listed 1598 Luminaire, UL/cUL Listed for Feed Through, UL/cUL Listed for Insulation Contact, AIR-TITE™ Certified ASTM E283

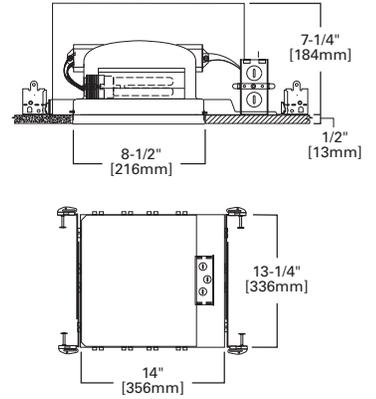

ORDERING INFORMATION: ORDER HOUSING AND TRIMS SEPARATELY^Δ

SAMPLE NUMBER: H1EFICAT - 10P

Housing	Trims
<p>H1EFICAT=8" Square Aperture, New Construction, IC AIR-TITE™, Compact Fluorescent, (2) 13W DTT CFL</p>	<p>Lenses and Diffusers</p> <p>10 Albalite Lens, (2) 13W DTT, OD: 9-3/8" [238mm] Square 10P=White Trim with Albalite Glass Lens 10PS=White Trim with Albalite Glass Lens, Wet Location listed Showerlight</p> <p>110 Albalite Glass Diffuser Showerlight, (2) 13W DTT, OD: 9-3/8" [238mm] Square 110P=White Trim with Frosted Glass Diffuser</p> <p>113 Fresnel Splay, (2) 13W DTT, OD: 9-3/8" [238mm] Square 113P=White Splay Trim with Fresnel Glass Lens</p> <p>11GP Drop Diffuser, (2) 13W DTT, OD: 9-3/8" [238mm] Square 11GP=White Trim with Glass Drop Diffuser</p> <p>13 Fresnel Lens, (2) 13W DTT, OD: 9-3/8" [238mm] Square 13P=White Trim with Fresnel Glass Lens 13PS=White Trim with Fresnel Glass Glass Lens, Wet Location Listed, Showerlight</p> <p>15 All Glass Diffuser, (2) 13W DTT, OD: 9-3/8" [238mm] Square 15=All Glass Frosted Diffuser</p>

NOTES: Δ Not to be used in direct contact with spray foam insulation. Δ UL/cUL Listed for Wet Location with select trims. Δ DTT = Double Twin Tube Compact Fluorescent Lamp.

Housing	Wattage	Voltage	CFL Lamp Type (lamp by others)	Generic Lamp Designation	Socket	Ballast	Lamp
H1EFICAT	(2) 13W	120V-277V	DTT (Double Triple Tube)	CFQ13W/G24q	G24q-1 (4-pin)	Electronic	Not included

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.


8-INCH SQUARE COMPACT FLUORESCENT SHALLOW NEW CONSTRUCTION HOUSING NON - IC

FEATURES

- Compact fluorescent with thermally protected electronic ballast
- Die-formed housing and plaster frame
- Housing may be removed from plaster frame for junction box access
- Shallow ceiling housing
- Electronic ballast 120V - 277V, HPF

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL/cUL Listed - Wet Location, UL/cUL Listed - Damp Location, UL/cUL Listed 1598 Luminaire, UL/cUL Listed for Feed Through



H242E

ORDERING INFORMATION: ORDER HOUSING AND TRIMS SEPARATELY^A

SAMPLE NUMBER: H242E - 10P

Housing	Trims
H242E=8" Square Aperture, Shallow Ceiling, New Construction, Non-IC, Compact Fluorescent, (2) 13W DTT CFL	<p>Lenses and Diffusers</p> <p>10 Albalite Lens, (2) 13W DTT, OD: 9-3/8" [238mm] Square 10P=White Trim with Albalite Glass Lens 10PS=White Trim with Albalite Glass Lens, Wet Location listed Showerlight</p> <p>11GP Drop Diffuser, (2) 13W DTT, OD: 9-3/8" [238mm] Square 11GP=White Trim with Glass Drop Diffuser</p> <p>13 Fresnel Lens, (2) 13W DTT, OD: 9-3/8" [238mm] Square 13P=White Trim with Fresnel Glass Lens 13PS=White Trim with Fresnel Glass Glass Lens, Wet Location Listed, Showerlight</p> <p>15 All Glass Diffuser, (2) 13W DTT, OD: 9-3/8" [238mm] Square 15=All Glass Frosted Diffuser</p>

NOTES: ^A UL/cUL Listed for Wet Location with select trims. ^Δ DTT = Double Twin Tube Compact Fluorescent Lamp.


Housing	Wattage	Voltage	CFL Lamp Type (lamp by others)	Generic Lamp Designation	Socket	Ballast	Lamp
H242E	(2) 13W	120V-277V	DTT (Quad Tube)	CFQ13W/G24q	G24q-1 (4-pin)	Electronic	Not included

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.

10 Albalite Glass Lens



10P White Trim with Albalite Glass Lens



10PS White Trim with Albalite Glass Lens, Wet Location listed Showerlight

HOUSING / LAMP:


H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19
H242E: (2) 13W DTT

DIMENSIONS: OD: 9-3/8" [238mm] Square

110 Albalite Glass Diffuser Showerlight



110P White Trim with Frosted Diffuser



HOUSING / LAMP:


H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19

DIMENSIONS: OD: 9-3/8" [238mm] Square

113 Fresnel Splay



113P White Splay Trim with Fresnel Glass Lens



HOUSING / LAMP:


H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19

DIMENSIONS: OD: 9-3/8" [238mm] Square

11GP Drop Diffuser



11GP White Trim with Glass Drop Diffuser



HOUSING / LAMP:


H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19
H242E: (2) 13W DTT

DIMENSIONS: OD: 9-3/8" [238mm] Square

13 Fresnel Glass Lens



13PS White Trim with Fresnel Glass Lens, Wet Location listed Showerlight



13P White Trim with Fresnel Glass Lens

HOUSING / LAMP:


H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19
H242E: (2) 13W DTT

DIMENSIONS: OD: 9-3/8" [238mm] Square

15 All Glass Diffuser



15 All Glass Frosted Diffuser



HOUSING / LAMP:

H1EF: (2) 18W DTT
H1EFICAT: (2) 13W DTT
H1IC: 60W A19
H1T: 100W A19
H242E: (2) 13W DTT

DIMENSIONS: OD: 9-3/8" [238mm] Square

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.