

General Specifications

GS 05P01C31-01EN

UT55A/UT52A
Digital Indicating Controllers**UTAdvanced®**

[Style: S9]

■ Overview

The UT55A/UT52A digital indicating controllers employ an easy-to-read, 14-segment large color LCD display, along with navigation keys, thus greatly increasing the monitoring and operating capabilities. A ladder sequence function is included as standard. The short depth of the controller helps save instrument panel space. The UT55A/UT52A also support open networks such as Ethernet communication.

■ Features

- A 14-segment, active (PV display color changing function) color LCD display is employed.
- Two five-digit, high-resolution displays are possible. Alphabet letters can be displayed in an easy-to-read manner. The guide display shows parameter names.
- Easy to operate
Navigation keys (SET/ENTER and Up/Down/Left/Right arrow keys) are employed to facilitate making settings.
- 65 mm depth
The small depth enables the mounting in a thin and small instrumented panel.
- Ladder sequence function is included as standard. This function allows for creating a simple sequence control. Dedicated LL50A Parameter Setting Software (sold separately) allows for performing programming using a ladder language.
- Various built-in open network functions such as Ethernet are available.
Easy connection with various vendors' PLCs is possible.
- Quick setting function
Setting only the minimum necessary parameters for operation is possible. (For single-loop control only)
- Equipped with a multitude of functions
Universal I/O and eight control modes (cascade control, heating/cooling control, feed forward control, etc.) are included as standard. PID control, heating/cooling control, feed forward control, etc. are available.

■ Functional Specifications

Control Specifications

(1) Control Mode

Control functions of the controller can be set as control modes.

Control mode	Function
SGL (1)	Single-loop control
CAS1 (2)	Cascade primary-loop control (*4)
CAS2 (3)	Cascade secondary-loop control (*4)
CAS (4)	Cascade control (*4)
BUM (5)	Loop control for backup (*4)
PVSW (6)	Loop control with PV switching (*4)
PVSEL (7)	Loop control with PV auto-selector (Max./Min./Ave./Diff.) (*4)
PVHD (8)	Control with PV-hold function

*4: Remote auxiliary analog input is required.

2) Control period

Selectable from 50 ms (*7), 100 ms, and 200 ms



Table of Number of Inputs and Outputs

Model and suffix code (See the model code)	Number of analog input points	Number of analog output points (*1)	Number of contact input points (*2)	Number of contact output points (*3)
UT55A				
-x0x	1	1	3	3
-x1x	2	1	9 (8)	8
-x2x	2	1	4 (3)	3
-x3x	1	1	8	8
-x4x	2	1	4 (3)	3
-x5x	2	1	9 (8)	8
-x6x	1	1	8	18
-x7x	4	1	6 (5)	3
UT52A				
-x0x	1	1	3	3
-x1x	2	1	3	3
-x2x	2	1	4 (3)	3
-x3x	1	1	5	5

*1: Excluding control output

*2: The numbers in parentheses show the numbers of points with RSP direct input option (/DR).

*3: Excluding control output relays

■ Control Computation Function

(1) Combination of types of control and control modes

Types of control	Control mode							
	1	2	3	4	5	6	7	8
PID control	✓	✓ ⁵	✓	✓	✓	✓	✓	✓
ON/OFF control (*5)	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Two-position, two-level control (*6)	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Heating and cooling control (*6)	✓	N/A	✓	✓	✓	✓	✓	✓
Sample PI control	✓	N/A	N/A	N/A	✓	✓	✓	✓
Batch PID control	✓	N/A	N/A	N/A	✓	✓	✓	✓
Feedforward control	✓	N/A	N/A	N/A	N/A	N/A	N/A	✓

✓: Available

N/A: Not Available

*5: Not selectable for Position proportional type

*6: Selectable for heating and cooling control

*7: Cascade control (Control mode 4) cannot be used.
"Super" function or "Super 2" function cannot be used.

YOKOGAWA ♦

Yokogawa Electric Corporation
2-9-32, Nakacho, Musashino-shi, Tokyo, 180-8750 Japan
Tel.: 81-422-52-7179 Fax.: 81-422-52-6619

GS 05P01C31-01EN
1st Edition Jan. 16, 2009 (KP)
7th Edition Jun. 28, 2013 (KP)

(2) Control Computation Function

- (a) Target setting point and the number of PID parameter groups
Respectively, eight sets of target setpoints, alarm setpoints, and PID parameters can be set. For cascade control, respectively, eight sets can be set for main (primary side) and slave (secondary side).
- (b) Selecting the PID parameter group
The following PID parameter groups can be selected.
- Target setpoint number (SPNO) (The PID number can be set arbitrarily.)
- Measured input zone PID
- Target setpoint zone PID
- Reached target setpoint zone PID
- (c) Auto-tuning
- Tuning results can be selected from two options, Normal or Stable.
- Tuning output limit can be set. (It cannot be used in heating/cooling control.)
- (d) "Super" function: Overshoot-suppressing function
- (e) "Super 2" function: Hunting-suppressing function
- (f) STOP preset output function
- (g) Input ERROR preset output function
- (h) MANUAL preset output function

(3) Operation Mode Switching

Operation mode switching	AUTO/MANUAL and RUN/STOP switching CASCADE/AUTO/MANUAL switching REMOTE/LOCAL switching
---------------------------------	---

(4) Control Parameter Setting Range

Proportional band	0.1 to 999.9%
Integral time	1 to 6000 sec. or OFF (using manual reset)
Derivative time	1 to 6000 sec. or OFF
ON/OFF control hysteresis (one or two hysteresis points)	0.0 to 100.0% of measured input range width
Preset output value	-5.0 to 105.0% (however, 0 mA or less cannot be output)
High/low output limiter	-5.0 to 105.0% Low limit setpoint < high limit setpoint
Tight shut function	When manual control is carried out with 4 to 20 mA output, control output can be reduced to about 0 mA.
Rate-of-change limiter of output	0.1 to 100.0%/sec., OFF
Output deadband	For heating and cooling control: -100.0 to 50.0% For position proportional control: 1.0 to 10.0%

(5) Ladder computation period

Ladder computation period is the same as control period.

Alarm Functions

- Types of Alarm

Measured value alarm	PV (measured value) high/low limit alarm Deviation high/low limit alarm Deviation high and low limits alarm Deviation within high and low limits alarm
Deviation alarm	Analog input PV high/low limit alarm
Rate-of-change alarm	Analog input RSP (REMOTE) SP high/low limit alarm Auxiliary analog input high/low limit alarm Feedback input high/low limit alarm PV rate-of-change alarm
Setpoint alarm	SP (setpoint) high/low limit alarm Target SP high/low limit alarm Target SP deviation high/low limit alarm Target SP deviation high and low limits alarm Target SP deviation within high and low limits alarm
Output alarm	Control output high/low limit alarm Cooling control output high/low limit alarm

Other alarms	Heater disconnection alarm (for /HA option) Self-diagnosis alarm FAIL
---------------------	---

- Alarm Functions

Alarm output action	Alarm stand-by action Alarm latch (forced reset) function Alarm hysteresis Alarm ON/OFF delay timer
Number of alarm settings	8 (per loop)
Number of alarm output points	Up to 18 (differs by model code)

Contact I/O Function

This function allows for allocating the input error condition, operation condition, alarm condition or other conditions to the contact input and contact output.

Contact input	AUTO/MANUAL switching REMOTE/LOCAL switching STOP/START switching Switching to CASCADE Switching to AUTO Switching to MANUAL Switching to REMOTE Switching to LOCAL AUTO-TUNING START/STOP switching OUTPUT TRACKING switching Two-input switching PV Hold LCD backlight ON/OFF switching Message interrupt displays 1 through 4 SP number specification PID number specification Manual preset output number specification
Contact output	Loop 1 alarms 1 through 8 Loop 2 alarms 1 through 8 (for cascade control) Status output

Ladder Sequence Function**(1) Number of I/O Points**

	UT55A	UT52A
Number of digital input points	Up to 9	Up to 5
Number of digital output points	Up to 18	Up to 5

This is limited by the number of contact I/O signal points. (See the model code.)

(2) Types of Command

	Number of commands	Remark
Number of basic command types	13	Load, AND, OR, Timer, Counter, etc.
Number of application command types	73	Comparison, reverse, addition/subtraction/multiplication/division, logic operation, high/low limiter, etc.

(3) Sequence Device

	Types of device	Number of points
Digital I/O	Input relay Output relay	9 (max) 18 (max)
Internal device	M relay (bit data) DAT register (data) P register (parameter) K register (constant)	256 28 10 30
Special device	Special relay (bit data)	12

Process data and process relay can be used besides the above-mentioned.

(4) Program capacity

Max. Program capacity: 500 steps *

*: Available number of steps differs according to the parameters, using command and control period.

(5) Ladder computation period

Ladder computation period is the same as control period.

Communication Function

	Function	Method	Interface	Targets	Max connection	Communication Data	
Modbus/TCP	A standard industry protocol allowing communications between the controller and devices such as PCs, PLCs, and DCSs.	Server	Ethernet	PLC and others	2 connections	PV, SP, OUT, ALM etc	
		Gateway	Ethernet +RS-485	RS-485: UT55A/UT52A/UT35A/UT32A/UP55A/UP35A/UM33A (*1)	31 units		
		Slave	RS-485	PLC and others, UT55A/UT52A/UT35A/UT32A/UP55A/UP35A/UM33A(*2)	31 units		
PROFIBUS-DP	Used for communication between PLCs and remote I/O, enabling high-speed data transmission.	Slave	RS-485	PLC and others	Number of nodes: 126	PV, SP, OUT, ALM etc	
		Modbus master function	RS-485	UT55A/UT52A/UT35A/UT32A/UP55A/UP35A	31 Units (Main Controller is included.)		
CC-Link		Slave	RS-485	PLC and others	Number of nodes: 42 (Remote device)		
		Modbus master function	RS-485	UT55A/UT52A/UT35A/UT32A/UP55A/UP35A	31 Units (Main Controller is included.)		
DeviceNet		Slave	RS-485	PLC and others	Number of nodes: 64	31 Units (Main Controller is included.)	
		Modbus master function	RS-485	UT55A/UT52A/UT35A/UT32A/UP55A/UP35A	31 Units (Main Controller is included.)		
Peer to peer	A protocol allowing multiple controllers to send and receive data between one another. The Ladder Program is used.	Multi-drop	RS-485 (2 wire only)	UT55A/UT52A/UT35A/UT32A/UP55A/UP35A	Read/Write: 4 units Read only : 28 units		
Coordinated Communication	A protocol to coordinate the operation of two or more instruments controlling the same process.	Master/Slave	RS-485	UT55A/UT52A/UT35A/UT32A/UP55A/UP35A (*2)	Master : 1 unit Slave : 31 units		
PC link	The proprietary Yokogawa protocol allowing communications to PCs, PLCs and touch panels.	Slave	RS-485	PC and others, UT55A/UT52A/UT35A/UT32A/UP55A/UP35A/UM33A(*2)	31units		
Ladder	A protocol to communicate to PLCs.						

*1: UT digital indicating controller, Signal conditioner JUXTA, Power monitor POWERCERT can be connected.

*2: UT digital indication controllers can be connected.

Physical interface

Ethernet	Standard : IEEE802.3 (10BASE-T, 100BASE-TX) Max segment length : 100m Max. Connecting Configuration : Cascade Max. 4 level (10BASE-T), Max. 2 level (100BASE-TX)
RS-485	Standard : EIA RS-485 Communication method : Two-wire half-duplex or four-wire half-duplex, start-stop synchronization and non-procedural Baud rate : 600, 1200, 2400, 4800, 9600, 19200 or 38400bps (*3) Peer to peer communication is only 19200bps Maximum communication distance : 1200m Terminating resistor : 220Ω (External)
PROFIBUS-DP	Standard : Field bus (IEC61158) Corresponding version : DP V0 Baud rate : 9.6k, 19.2k, 45.45k, 93.75k, 187.5k, 0.5M, 1.5M, 3M, 6M, 12M, AUTO (*4) Communication distance : 1200m (9.6k to 93.75k) 1000m (187.5k) 400m (0.5M) 200m (1.5M) 100m (3M to 12M)
CC-Link	*4: AUTO automatically sets the baud rate to that of the host controller (PROFIBUS-DP master). Supported on version : Remote device (Ver.1.10, Ver.2.00) Baud rate : 156k, 625k, 2.5M, 5M, 10M bps Transmission distance : 1.2km (156k bps), 600m (625k bps), 200m (2.5M bps), 150m (5M bps), 100m (10M bps) When used optical repeater : 7.6 km (156k) to 4.3 km (10M)
DeviceNet	Field bus (IEC61158) Baud rate: 125k, 250k, 500k bps Transmission distance: 500m (125k bps), 250m (250k bps), 100m (500k bps)

■ Hardware Specifications

Display Specifications

- PV display
5-digit, 14-segment active color LCD (white/red)
Character height: 21.5 mm for UT55A and 13.0 mm for UT52A
- Data display
5-digit, 11-segment color LCD (orange)
- Bar graph display
12-segment color LCD (orange and white)

Universal Input Specifications

- Number of input points: 1
- Types of input, instrument range, and measurement accuracy (see the table below)

Types of input	Instrument range		Accuracy	
	°C	°F		
Thermocouple	K	-270.0 to 1370.0°C	-450.0 to 2500.0°F	±0.1% of instrument range ±1 digit for 0°C or more
	J	-270.0 to 1000.0°C	-450.0 to 2300.0°F	±0.2% of instrument range ±1 digit for less than 0°C
	T	-200.0 to 500.0°C	-200.0 to 1000.0°F	However, ±2% of instrument range ±1 digit for less than -200°C of thermocouple K ±1% of instrument range ±1 digit for less than -200°C of thermocouple T
	B	-200.0 to 1200.0°C	-300.0 to 2300.0°F	±0.15% of instrument range ±1 digit for 400°C or more
	S	-270.0 to 400.0°C	-450.0 to 750.0°F	±5% of instrument range ±1 digit for less than 400°C
	R	0.0 to 1800.0°C	32 to 3300°F	±0.15% of instrument range ±1 digit for 400°C or more
	N	0.0 to 1700.0°C	32 to 3100°F	±0.1% of instrument range ±1 digit
	E	-200.0 to 900.0°C	-300.0 to 1600.0°F	±0.25% of instrument range ±1 digit for less than 0°C
	L	-200.0 to 400.0°C	-300.0 to 750.0°F	±0.1% of instrument range ±1 digit for 0°C or more
	U	0.0 to 400.0°C	-200.0 to 1000.0°F	±0.2% of instrument range ±1 digit for less than -200.0°C of thermocouple E
Resistance-temperature detector (RTD) 3-wire	W (*2)	0.0 to 2300.0°C	32 to 4200°F	±0.2% of instrument range ±1 digit
	Platinel 2	0.0 to 1390.0°C	32.0 to 2500.0°F	±0.1% of instrument range ±1 digit
	PR20-40	0.0 to 1900.0°C	32 to 3400°F	±0.5% of instrument range ±1 digit for 800°C or more Accuracy not guaranteed for less than 800°C
	W97 Re3-W75 Re25	0.0 to 2000.0°C	32 to 3600°F	±0.2% of instrument range ±1 digit
	JPt100	-200.0 to 500.0°C	-300.0 to 1000.0°F	±0.1% of instrument range ±1 digit (*1)
		-150.00 to 150.00°C	-200.0 to 300.0°F	±0.1% of instrument range ±1 digit
	Pt100	-200.0 to 850.0°C	-300.0 to 1560.0°F	±0.1% of instrument range ±1 digit
		-200.0 to 500.0°C	-300.0 to 1000.0°F	±0.1% of instrument range ±1 digit (*1)
		-150.00 to 150.00°C	-200.0 to 300.0°F	±0.1% of instrument range ±1 digit
	Standard signal	0.400 to 2.0000 V	-	±0.1% of instrument range ±1 digit
		1.000 to 5.000 V	-	
		4.00 to 20.00 mA	-	
	DC voltage	0.000 to 2.000 V	-	
		0.000 to 10.00 V	-	
		-10.00 to 20.00 mV	-	
	DC current	0.00 to 20.00 mA	-	

The accuracy is that in the standard operating conditions: 23 ±2°C, 55 ±10%RH, and power frequency at 50/60 Hz.

- *1: ±0.3°C and ±1 digit in the range between 0 and 100°C
±0.5°C ±1 digit in the range between -100 and 200°C
- *2: W-5% Re/W-26% Re (Hoskins Mfg.Co.), ASTM E988

- Applicable standards: JIS, IEC and DIN (ITS-90) for thermocouples and resistance-temperature detectors (RTD)
- Input sampling period: Synchronized to control period
- Burnout detection

Upscale and downscale of function, and OFF can be specified for the standard signal of thermocouple and resistance-temperature detector (RTD). For integrated signal input, 0.1 V or 0.4 mA or less is judged as a burnout.

- Input bias current: 0.05 μA (for thermocouple and resistance-temperature detector (RTD))
- Resistance-temperature detector (RTD) measured current: About 0.16 mA
- Input resistance
 - 1 MΩ or more for thermocouple/mV input
 - About 1 MΩ for voltage input
 - About 250 Ω for current input (with built-in shunt resistance)
- Allowable signal source resistance
 - 250 Ω or less for thermocouple/mV input
 - Effect of signal source resistance: 0.1 μV/Ω or less
 - 2 kΩ or less for DC voltage input
 - Effect of signal source resistance: about 0.01%/100 Ω
- Allowable wiring resistance
 - Up to 150 Ω per line for resistance-temperature detector (RTD) input (conductor resistance between the three lines shall be equal)
 - Effect of wiring resistance: ±0.1°C/10 Ω
- Allowable input voltage/current
 - ±10 V DC for thermocouple/mV/mA or resistance-temperature detector (RTD) input
 - ±20 V DC for V input
 - ±40 mADC for mA input
- Noise reduction ratio
 - 40 dB or more (at 50/60 Hz) in normal mode
 - 120 dB or more (at 50/60 Hz) in common mode
- Reference junction compensation error
 - ±1.0°C (15 to 35°C)
 - ±1.5°C (-10 to 5°C and 35 to 50°C)

Auxiliary Analog Input Specifications

- This function can be used for remote setpoint setting, external compensating input, auxiliary input for computation, etc.
- Number of input points: see the model code table.
- For types of input, instrument range, and measurement accuracy, see the table below.

Types of input	Instrument range	Accuracy
Integrated signal	0.400 to 2.000 V	±0.2% of instrument range ±1 digit
	1.000 to 5.000 V	±0.1% of instrument range ±1 digit
DC voltage	0.000 to 2.000 V	±0.2% of instrument range ±1 digit
	0.00 to 10.00 V	±0.1% of instrument range ±1 digit
DC voltage with High input impedance	0.000 to 1.250 V	±0.1% of instrument range ±1 digit

- Input sampling period: Synchronized to control period
- Input resistance: about 1 MΩ
However, 10 MΩ or more for high input impedance
- Burnout detection: Functions at standard signal
Burnout is determined to have occurred if it is 0.1 V or less.

Remote Input with Direct Input Specifications (for /DR Option)

(3-wire or 4-wire when RTD is selected)

- Number of input points: 1 point
- Types of input, instrument range, and measurement accuracy are the same as those of universal input (standard), except for the table below.

Types of input	Instrument range		Accuracy	
	°C	°F		
4-wire RTD	JPt100	-200.0 to 500.0°C -150.00 to 150.00°C	-300.0 to 1000.0°F -200.0 to 300.0°F	±0.5°C ±1 digit ±0.2°C ±1 digit
	Pt100	-200.0 to 850.0°C	-300.0 to 1560.0°F	±0.1% of instrument range ±1 digit (*)
		-200.0 to 500.0°C	-300.0 to 1000.0°F	±0.5°C ±1 digit
		-150.00 to 150.00°C	-200.0 to 300.0°F	±0.2°C ±1 digit

*: ±0.5 °C ±1 digit in the range of -200.0 to 500.0 °C

- Input sampling period: Synchronized to control period
- Burnout detection: Same as universal input

Analog Output Specifications

- Number of points
 - Control output (heating-side output): 1 point (standard), which is shared with transmission output
 - Cooling-side output: 1 point, which is shared with transmission output
- Output functions
 - Current output or voltage pulse output
- Current output
 - 4 to 20 mA DC or 0 to 20 mA DC/load resistance 600 Ω or less
- Current output accuracy
 - ±0.1% of span (however, ±5% of span for 1 mA or less)
 - The accuracy is that in the standard operating conditions: 23 ±2°C, 55 ±10%RH, and power frequency at 50/60 Hz
- Voltage pulse output
 - Application: time proportional output
 - ON voltage: 12 V or more/load resistance of 600 Ω or more
 - OFF voltage: 0.1 V DC or less
 - Time resolution: 10 ms or 0.1% of output value, whichever is larger

Relay Contact Output Specifications

- Types of contact and number of points
 - Control relay output: one 1c-contact point
 - Cooling output of heating and cooling control: one 1c-contact point (For UT55A only)
 - For UT52A heating/cooling output: 2 1a-contact points
 - Alarm output: 3 1a-contact points (Common is separated)
- Contact rating
 - 1c-contact: 3 A at 250 V AC or 3 A at 30 V DC (resistance load)
 - 1a-contact:
 - For alarm output: 1 A at 240 V AC or 1 A at 30 V DC (resistance load)
 - For UT52A control relay output: 3 A at 240 V AC or 3 A at 30 V DC (resistance load)
- *: The control output should always be used with a load of 10 mA or more.
- The alarm output should always be used with a load of 1 mA or more.
- Application: time proportional output, alarm output, FAIL output, etc.

- Time resolution for control output: 10 ms or 0.1% of output value, whichever is larger

Step Response Time Specifications

Within 500 ms (for a control period of 50 ms or 100 ms)

Within 1 s (for a control period of 200 ms)

(Response time at 63% of transmission output when a change is made stepwise in the range between 10 and 90% of input span)

Position Proportional Output Specifications

- Position signal input
 - Slide resistance: 100 Ω to 2.5 kΩ of total resistance
 - 100% side and slide line: with disconnection detection
 - 0% side: without disconnection detection
 - Current input: 4 to 20 mA DC (with disconnection detection)
 - Input resistance: about 330 Ω
- Sampling period: 50 ms
- Measurement resolution: 0.1% of input span
- Position proportional relay output
 - UT55A: Two 1a-contact points , 3 A at 250 V AC or 3 A at 30 V DC (resistance load)
 - UT52A: Two 1a-contact points , 3 A at 240 V AC or 3 A at 30 V DC (resistance load)
- *: This should always be used with a load of 10 mA or more.

Retransmission Output Specifications

- Number of points: 1 point (standard), which is shared with 15 V DC loop power supply
 - Additional 2 points when analog control output and cooling-side analog control output are not used
- Output function: current output
 - 4 to 20 mA DC or 0 to 20 mA DC/load resistance 600 Ω or less
- Current output accuracy (conversion accuracy from PV display on the set scale): ±0.1% of span (however, ±5% of span for 1 mA or less)
 - The accuracy is that in the basic operating conditions: 23 ±2°C, 55 ±10%RH, and power frequency at 50/60 Hz
 - This is not conversion accuracy through input and output but the performance of transmission output itself.

15V DC Loop Power Supply Specifications

- Number of points: 1 point (standard), which is shared with retransmission output
 - Control output (1 point) can also be used.
- Supply voltage: 14.5 to 18.0 V DC
- Maximum supply current: about 21 mA (with short-circuit current limiting circuit)

Contact Input Specifications

- Number of points: 3 points (standard)
 - For the maximum number of points, see the model and suffix code table.
- Input type: no-voltage contact input or transistor contact input
- Input contact capacity: 12 V DC, 10 mA or more
 - Be sure to use a contact with a minimum ON current of 1 mA or more
- ON/OFF detection
 - For no-voltage contact input:
 - Contact resistance 1 kΩ or less in ON state
 - Contact resistance 50 kΩ or more in OFF state
 - Transistor contact input:
 - 2 V or less in ON state
 - Leak current 100 μ A or less in OFF state

- Status detection minimum hold time: control period + 50 ms
- Application: SP switching, operation mode switching, event input

Transistor Contact Output Specifications

- Number of points: see the model and suffix code table
- Output form: open collector (sink current)
- Output contact capacity: Up to 24 V DC, 50 mA
- Output time resolution: min 50 ms

Heater Break Alarm Specifications (for /HA Option)

- Function: Measures the heater current using an external current transformer (CT) and generates a heater break alarm when the measured value is less than the disconnection detection value.
- Number of input points: 2 points
- Number of output points: 2 points (transistor contract output)
- CT input resistance: about 9.4 Ω
- CT input range: 0.0 to 0.1 Arms (0.12 Arms or more cannot be applied)
- Heater current alarm setting range: OFF, 0.1 to 300.0 Arms
Heater current measured value display range: 0.0 to 360.0 Arms
*: The CT ratio can be set. CT ratio setting range: 1 to 3300
- Recommended CT: CT from URD Co. Ltd.
CTL-6-S-H: CT ratio 800, measurable current range: 0.1 to 80.0 Arms
CTL-12L-30: CT ratio 3000, measurable current range: 0.1 to 180.0 Arms
- Heater current measurement period: 200 ms
- Heater current measurement accuracy: ±5% of CT input range span ±1 digit (CT error is not included)
- Heater current detection resolution: Within 1/250 of CT input range span
- Disconnection detection ON time: Minimum 200 ms. (for time proportional output)

24 V DC Loop Power Supply Specifications (for /LP Option)

- Application: Power is supplied to the 2-wire transmitter.
- Supply voltage: 21.6 to 28.0 V DC
- Rated current: 4 to 20 mA DC
- Maximum supply current: About 30 mA (with short-circuit current limiting circuit)

Safety and EMC Standards

- Safety:
Compliant with IEC/EN61010-1 (CE), IEC/EN61010-2-030 (CE), approved by CAN/CSA C22.2 No. 61010-1 (CSA), approved by UL61010-1.
Installation category: II
Pollution degree: 2
Measurement category: I (CAT I) (UL, CSA)
O (Other) (CE)
Rated measurement input voltage: Max. 10 V DC
Rated transient overvoltage: 1500 V (*)
*: This is a reference safety standard value for measurement category I of IEC/EN/CSA/UL61010-1. This value is not necessarily a guarantee of instrument performance.
- EMC standards:
Compliant with
CE marking
EN 61326-1 Class A, Table 2 (For use in industrial locations),
EN 61326-2-3
*: The instrument continues to operate at a measurement accuracy of within ±20% of the range during testing.
EN 55011 Class A, Group 1
EN 61000-3-2 Class A

EN 61000-3-3
EMC Regulatory Arrangement in Australia and New Zealand
EN 55011 Class A, Group 1

- KC marking: Electromagnetic wave interference prevention standard, electromagnetic wave protection standard compliance

Power Supply Specifications and Isolation

- Power supply
Rated voltage: 100 to 240 V AC (+10%/-15%), 50/60 Hz
24 V AC/DC (+10%/-15%) (When the /DC option is specified)
- Power consumption: UT55A: 18 VA (For the /DC option. DC: 9 VA, AC: 14 VA)
UT52A: 15 VA (For the /DC option. DC: 7 VA, AC: 11 VA)
- Storage: Nonvolatile memory
- Allowable power interruption time: 20 ms (at 100 V AC)
- Withstanding voltage
2300 V AC for 1 minute between primary and secondary terminals (UL, CSA)
3000 V AC for 1 minute between primary and secondary terminals (CE)
1500 V AC for 1 minute between primary terminals
500 V AC for 1 minute between secondary terminals (Primary terminals = Power (*) and relay output terminals, Secondary terminals = Analog I/O signal terminals, contact input terminals, communication terminals, and functional grounding terminals.)
*: Power terminals for 24 V AC/DC models are the secondary terminals.
- Insulation resistance
Between power supply terminals and a grounding terminal: 20 MΩ or more at 500 V DC
- Isolation specifications

PV (universal) input terminal	Internal circuits	Power supply
Remote (universal) input terminals with direct input / Remote input terminals		
Aux. analog (AIN2) input terminals		
Aux. analog (AIN4) input terminals		
Control and transmission (analog) output terminal (not isolated between the analog output terminals) Valve position (feedback) input terminal		
Control relay (c-contact) output terminal		
Alarm-1 relay (a-contact) output terminal		
Alarm-2 relay (a-contact) output terminal		
Alarm-3 relay (a-contact) output terminal		
Position proportional relay output terminal		
Contact input terminal (All) RS485 communication terminal (2 ports)		
24 V DC loop power supply terminal		
Contact output (transistor) terminal		
Ethernet/PROFIBUS-DP/CC-Link/DeviceNet communication terminal		
Current transformer input terminal		

The circuits divided by lines are insulated mutually.

Environmental Conditions

Normal operating conditions

- Ambient temperature: -10 to 50°C (-10 to 40°C for side-by-side mounting of controllers)
For the CC-Link option, 0 to 50 °C (0 to 40 °C for side-by-side close mounting)
- Ambient humidity: 20 to 90% RH (no condensation)
- Magnetic field: 400 A/m or less
- Continuous vibration (at 5 to 9 Hz) Half amplitude of 1.5 mm or less
(at 9 to 150 Hz) 4.9 m/s² or less, 1 oct/min for 90 minutes each in the three axis directions
- Rapid vibration: 14.7 m/s², 15 s or less
- Impact: 98 m/s² or less, 11 msec.
- Installation altitude: 2,000 m or less above sea level
- Warm-up time: 30 minutes or more after the power is turned on
- Start-up time within 10 s

Transportation and Storage Conditions

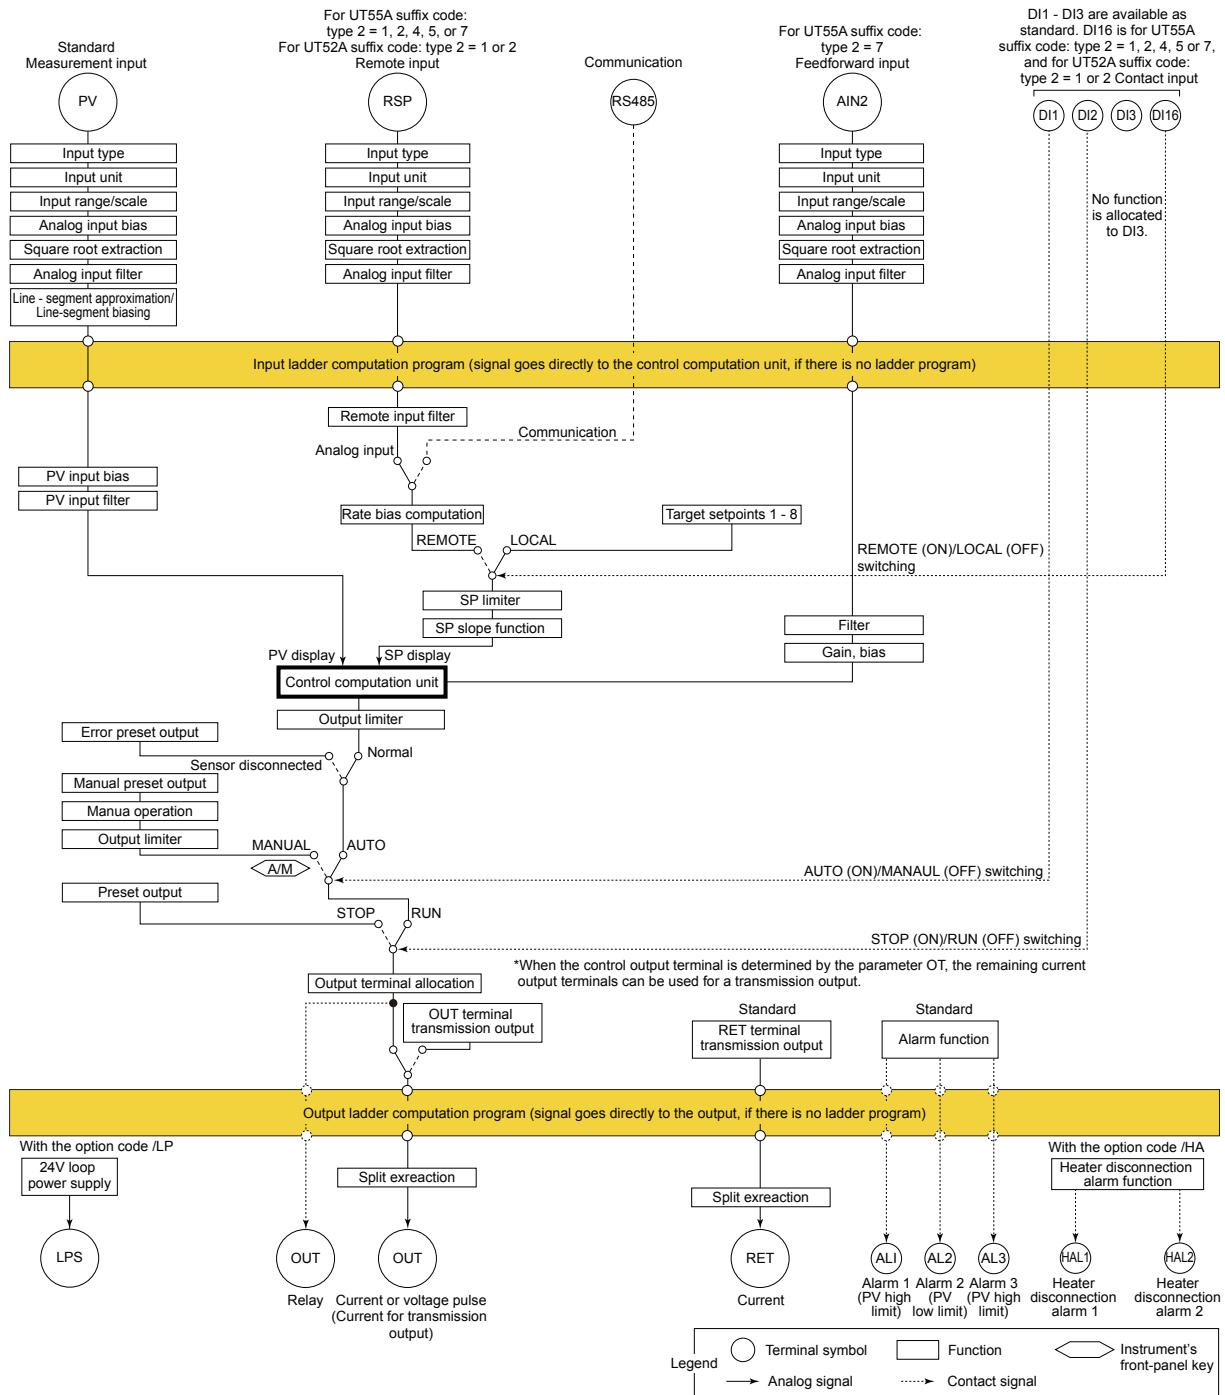
- Temperature: -25 to 70°C
- Temperature change rate: 20°C per hour or less
- Humidity: 5 to 95%RH (no condensation)

Effects of Operating Conditions

- Effect of ambient temperature
 - For voltage or TC input:
 $\pm 1 \mu V/^{\circ}C$ or $\pm 0.01\%$ of F.S. (instrument range)/°C, whichever is greater
 - For RTD input:
 $\pm 0.05^{\circ}C/^{\circ}C$ (ambient temperature) or less
 - For current input:
 $\pm 0.01\%$ of F.S. (instrument range)/°C
 - For analog output:
 $\pm 0.02\%$ of F.S./°C or less
- Effect of power supply fluctuation:
 - For analog input: $\pm 0.05\%$ of F.S. (instrument range) or less
 - For analog output: $\pm 0.05\%$ of F.S. or less
(Each within rated voltage range)

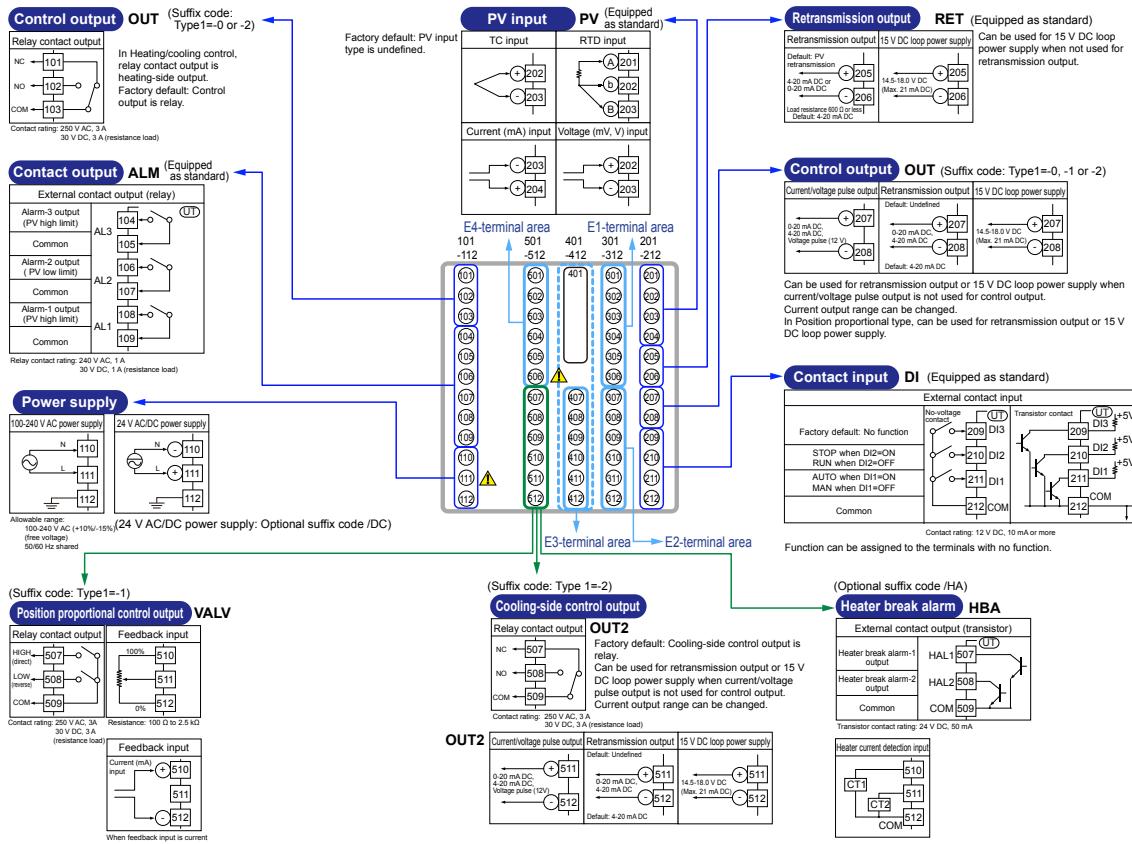
■ Block Diagram

Single Loop Control (For the block diagrams of other control modes, see the user manual)

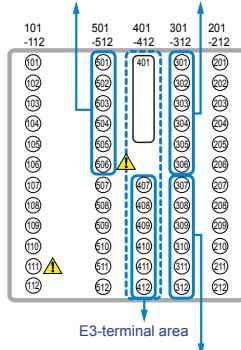


■ Terminal Arrangement

Terminal Arrangement for UT55A Single Loop Control (for the terminal arrangements of other control modes, see the user manual.)



E4-terminal area E1-terminal area



E3-terminal area

E2-terminal area

(Suffix code: Type 2=3)

Contact input DI


External contact input	
Common	No-voltage contact (UT)
Factory default: No function	301 COM
Factory default: No function	302 DI11
Factory default: No function	303 DI12
Factory default: No function	304 DI13
Factory default: No function	305 DI14
Factory default: No function	306 DI15
Factory default: No function	307 DI16
Factory default: No function	308 DI17
Factory default: No function	309 DI18
Factory default: No function	310 DI19
Factory default: No function	311 DI20
Factory default: No function	312 DI21
Factory default: No function	313 DI22
Factory default: No function	314 DI23
Factory default: No function	315 DI24
Factory default: No function	316 DI25

Contact rating: 12 V DC, 10 mA or more

Function can be assigned to the terminals with no function.


301-306 E1-Terminal Area

(Suffix code: Type 2=1, 2, 4, 5, or 7 and without optional suffix code /DR)

Remote input / Contact input RSP


301-306 E1-Terminal Area

(Suffix code: Type 2=1, 2, 4, 5, or 7 and with optional suffix code /DR)

Universal input (Remote input) RSP


307-312 E2-Terminal Area

(Suffix code: Type 2=1, 3, 5, or 6)

Contact output DO


Function can be assigned to the terminals with no function.

(Suffix code: Type 2=7)


Aux. analog input / Contact input AIN2

Function can be assigned to the terminals with no function.

401-412 E3-Terminal Area



Contact input DI (Suffix code: Type 2=1)

Contact rating: 12 V DC, 10 mA or more


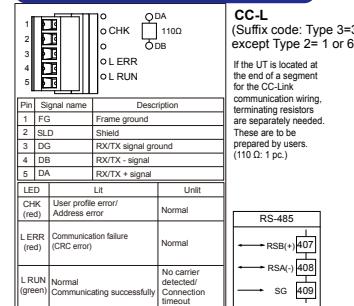

Contact output DO (Suffix code: Type 2=6)

Transistor contact rating: 24 V DC, 50 mA



(Suffix code: Type 3=1, except Type 2= 1 or 6)

RS-485 communication**PROFIBUS-DP communication (with Modbus master)**

(Suffix code: Type 3=2, except Type 2=1 or 6)

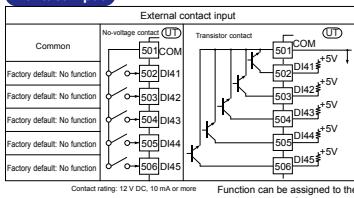
Ethernet communication (with gateway function)**CC-Link communication (with Modbus master)****DeviceNet communication (with Modbus master)**

501-506 E4-Terminal Area

RS-485 communication**RS-485 communication/24 V DC loop power supply**

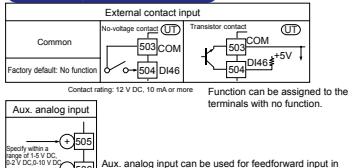
RS485/LPS24

(Suffix code: Type 2=1 or 2 and with optional suffix code /LP)

Contact input DI (Suffix code: Type 2=5 or 6)

Function can be assigned to the terminals with no function.

(Suffix code: Type 2=7)

Aux. analog input/Contact input AIN4

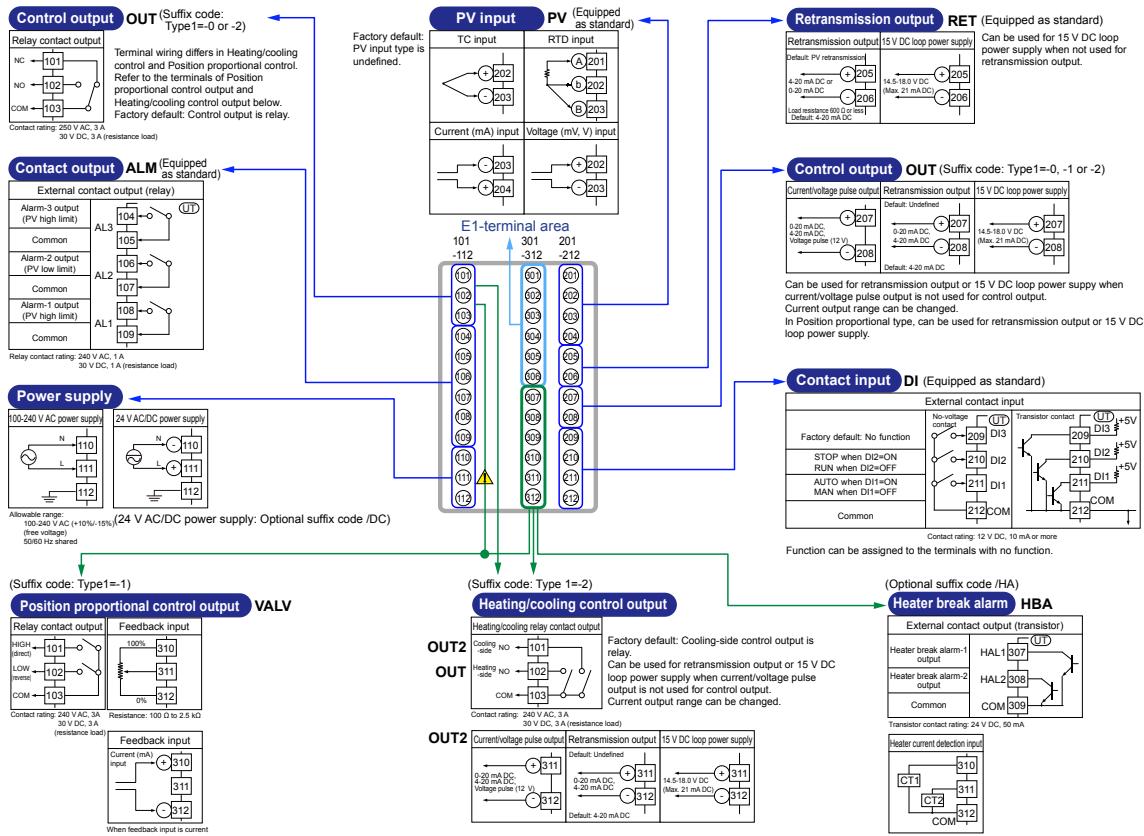
Function can be assigned to the terminals with no function.

24 V DC loop power supply

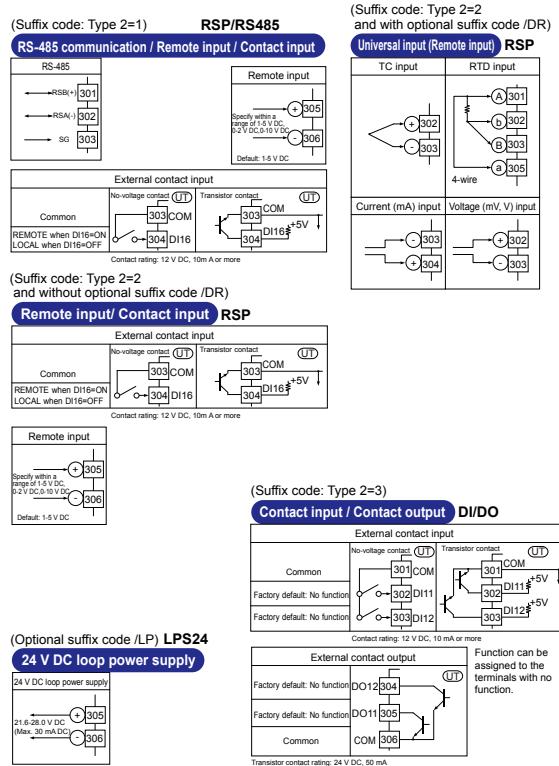
LPS24

(Suffix code: Type 2=other than 1, 2, 5, 6, or 7 and with optional suffix code /LP)

Terminal Arrangement for UT52A Single Loop Control (for the terminal arrangements of other control modes, see the user manual.)



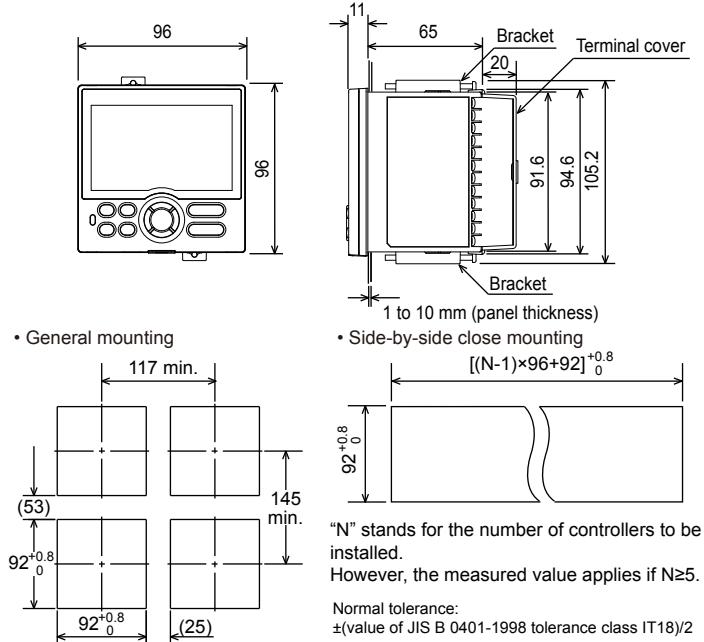
301-306 E1-Terminal Area



■ External Dimensions and Panel Cutout Dimensions

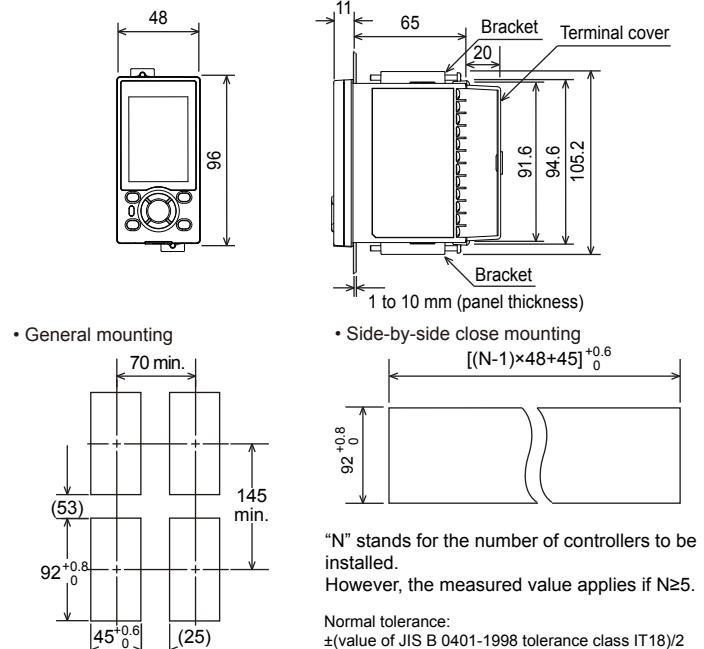
UT55A

Unit: mm



UT52A

Unit: mm



■ Construction, Mounting, and Wiring

- Dust-proof and drip-proof: IP66 (Front panel) (Except for side-by-side close mounting)/NEMA4 *
 - *: Hose down test only
- Material: Polycarbonate resin (Flame retardancy: UL94 V-0)
- Case color: White (Light gray) or Black (Light Charcoal gray)
- Weight: 0.5 kg or less
- External dimensions (mm):
UT55A: 96 (width) x 96 (height) x 65 (depth from the panel surface)

UT52A: 48 (width) x 96 (height) x 65 (depth from the panel surface)

- Mounting: Direct panel mounting; mounting bracket, one each for upper and lower mounting
- Panel cutout dimensions (mm):
 - UT55A: 92^{+0.8/0} (width) x 92^{+0.8/0} (height)
 - UT52A: 45^{+0.6/0} (width) x 92^{+0.8/0} (height)
- Mounting position: Up to 30 degrees above the horizontal. No downward titling allowed.
- Wiring: M3 screw terminal with square washer (signal wiring and power)

■ Model and Suffix Code

Model	Suffix code		Optional suffix code	Description
UT55A				Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply , 3 DIs, and 3 DOs) (Power supply 100-240 V AC)
Type 1: Basic control	-0			Standard type
	-1			Position proportional type
	-2			Heating/cooling type
Type 2: Functions (*1)	0			None
	1			Remote (1 additional aux. analog) input, 6 additional DIs, 5 additional DOs, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) (*2)
	2			Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) (*2)
	3			5 additional DIs and 5 additional DOs
	4			Remote (1 additional aux. analog) input and 1 additional DI
	5			Remote (1 additional aux. analog) input, 6 additional DIs, and 5 additional DOs
	6			5 additional DIs, and 15 additional DOs
	7			3 additional aux. analog inputs and 3 additional DIs
Type 3: Open networks	0			None
	1			RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
	2			Ethernet communication (with serial gateway function)
	3			CC-Link communication (with Modbus master function)
	4			PROFIBUS-DP communication (with Modbus master function)
	5			DeviceNet communication (with Modbus master function)
Display language (*7)	-1			English
	-2			German
	-3			French
	-4			Spanish
Case color	0			White (Light gray)
	1			Black (Light charcoal gray)
Fixed code	-00			Always "-00"
Options	/DR			Additional direct input (TC &, 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted (*3)
	/LP			24 V DC loop power supply (*4)
	/HA			Heater break alarm (this can be specified when 0 is set to the type 1 code)
	/DC			Power supply 24 V AC/DC
	/CT			Coating (without safety standard (UL/CSA) and CE markings)

*1: When "1" or "6" is specified for the Type 2 code, only "0" can be specified for the Type 3 code.

*2: When the /LP option is specified, the RS-485 communication for "1" or "2" of the Type 2 code is 2-wire system.

*3: When any of "1", "2", "4", "5", or "7" is specified for the Type 2 code, the /DR option can be specified.

*4: The /LP option can be specified in the combination of Type 2 code (any of "0", "2", "3", or "4") and Type 3 code (any of "0" or "1"). Additionally the /LP option can be specified in the combination of Type 2 code "1" and Type 3 code "0".

Model	Suffix code		Optional suffix code	Description
UT52A				Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply , 3 DIs, and 3 DOs) (Power supply 100-240 V AC)
Type 1: Basic control	-0			Standard type
	-1			Position proportional type
	-2			Heating/cooling type
Type 2: Functions	0			None
	1			Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire)
	2			Remote (1 additional aux. analog) input and 1 additional DI
	3			2 additional DIs, and 2 additional DOs
Type 3: Open networks	0			None
Display language (*7)	-1			English
	-2			German
	-3			French
	-4			Spanish
Case color	0			White (Light gray)
	1			Black (Light charcoal gray)
Fixed code	-00			Always "-00"
Options	/DR			Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted (*5)
	/LP			24 V DC loop power supply (*6)
	/HA			Heater break alarm (this can be specified when 0 is set to the type 1 code)
	/DC			Power supply 24 V AC/DC
	/CT			Coating (without safety standard (UL/CSA) and CE markings)

*5: When "2" is specified for the Type 2 code, the /DR option can be specified.

*6: The /LP option can be specified in the combination of Type 1 code (any of "0" or "1") and Type 2 code "0".

*7: English, German, French, and Spanish can be displayed as the guide display.

■ Items to be specified when ordering

Model and suffix codes, whether User's Manual and QIC required.

■ Standard accessories

Terminal cover, Brackets (mounting hardware), Unit label, and Operation Guide for Single-loop Control.

■ Special Order Items

Model code	Suffix code	Description
LL50A	-00	Parameter Setting Software
X010	See the General Specifications (*)	Resistance Module

*: Necessary to input current signal to voltage input terminal.

Name	Model
Terminal cover (for UT55A)	UTAP001
Terminal cover (for UT52A)	UTAP002
User's Manual (CD)	UTAP003

User's Manual

Product user's manuals can be downloaded or viewed at the following URL. To view the user's manual, you need to use Adobe Reader 7 or later by Adobe Systems.

URL: <http://www.yokogawa.com/ns/ut/im/>