

HALO

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION OF L-973 CANOPY ADAPTER 120 V.A.C.

NOTE: For use ONLY with Halo single & 2 circuit lampholders - 300W max A.C.

WARNING: Turn off main power supply before attempting to install this device. Danger of electric shock.


INSTALLATION

Step 1 Turn power off. Mount the adjustable mounting plate to the ceiling elec. box with (2) 8-32 screws as shown. Select the desired canopy mtg. position.

Step 2 Bring feed wire through center hole of mtg. plate. Connect these wires to wires from L973 adapter, black to black, white to white. If a green wire is available, connect it to the bare copper wire from the L-973 adapter. The bare copper wire may also be connected to one of the electrical box mtg. screws.

Step 3 Attach the canopy with (2) 8-32 flat head painted screws (furnished)

Step 4 Insert the desired 120 V.A.C. lampholder into canopy observing ground polarity line. Max wattage 300 W.

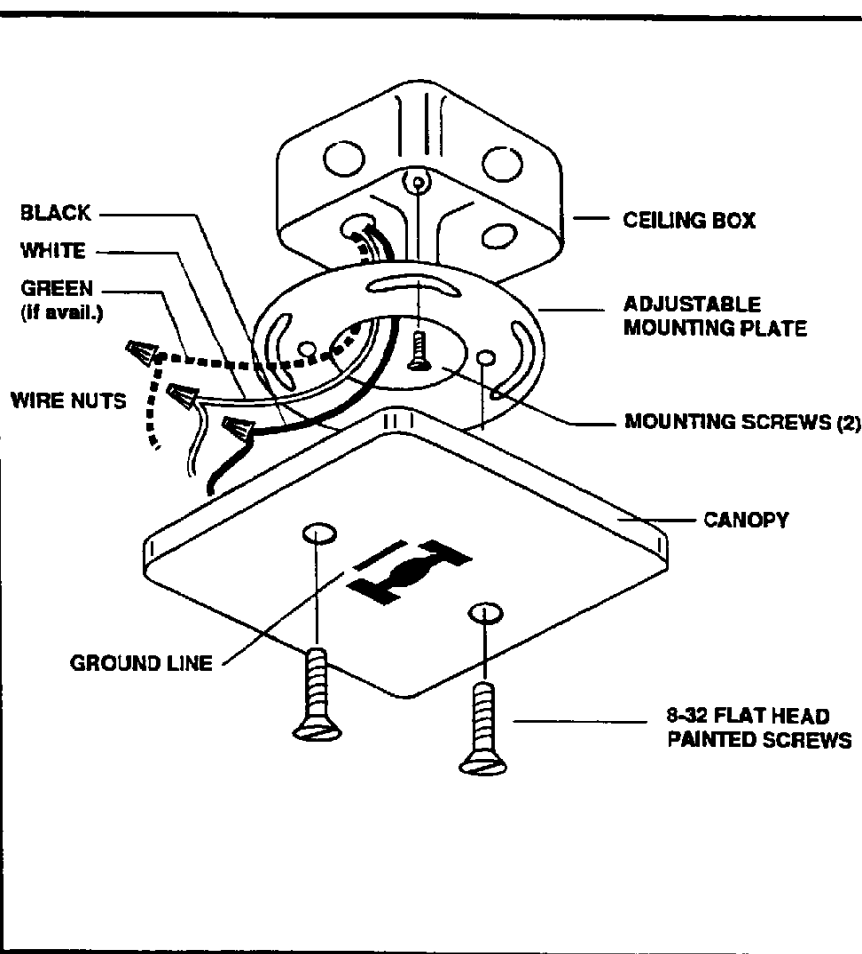

SAVE THESE INSTRUCTIONS

COOPER

Cooper Lighting

Halo 400 Busse Road Elk Grove Village, IL 60007

698495