


STALLATION INSTRUCTIONS **L-980 LIVE END CONDUIT** **FTER WITH 1/2" TRADE SIZE HOLE**

For use with L650 Series Track system only
 Electrical Rating: 120V, 60HZ, 20A

CATALOG NO.	FINISH
L-980	☐ P
	☐ MB



HALO LIGHTING
 400 BUSSE ROAD
 ELK GROVE VILLAGE, IL 60007

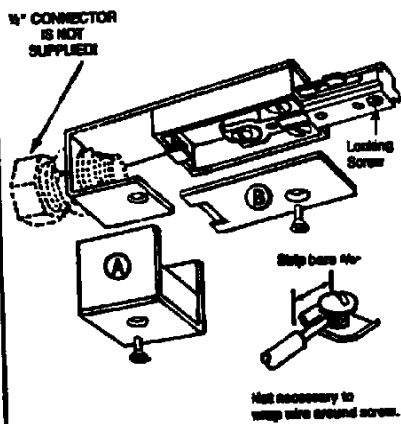

Step 1. Insert end of connector into system. If connector does not slide into track, **DO NOT FORCE**. Track connector is polarized. Turn connector and use opposite ends. Ground connection on the same side as polarity groove track. After installation tighten screw of connector to secure to track.

Step 2. Remove covers (A) and (B) attach 1/2" connector (not supplied) end. Then fasten conduit to connector.

Step 3. Pull wires into live end conduit thru oblong slot and connect to brass terminal, "P" white to nickel terminal "N" and (if green ground available) connect to green ground screw. "G"

Step 4. Replace covers (A) and (B) tighten screws.

1/2" CONNECTOR IS NOT SUPPLIED

Locking Screw

Step base 1/2"

Not necessary to wrap wire around screw.

696459

696459