

LEMDEBM3 Emergency Lighting

Tempus Exit Blade



SPECIFICATIONS:

- **Input Voltage:**
AC220-240V 50/60Hz
- **Emergency Duration:**
>3 Hours

- **Recharge Time:** 24 Hours
- **Operating Environmental Temperature:** 0°C - 25°C
- **Battery:**
LEMDEBM3BAT-02







ENSURE ELECTRICAL SUPPLY IS DISCONNECTED/ ISOLATED BEFORE COMMENCING INSTALLATION

NOTE - To comply with regulations, installation must be carried out by qualified electrician and in accordance with the current IEE Wiring Regulations (BS7671) and Building Regulations

State	Color	LED indication	Status	Comment
	Green	Permanent green	Charging Mode Fully Charged	AC mode
	Green	Fast flashing green (0.1 sec on, 0.1 sec off)	Function test underway	
	Green	Slow flashing green (1 sec on, 1 sec off)	Duration test underway	
	Red	Permanent red	Load failure	Open circuit/ Short circuit Led failure (emergency mode)
	Red	Slow flashing red (1 sec on, 1 sec off)	Battery failure	Battery failed the duration test or function test / No battery
		Green and red off	DC mode	Battery operation (emergency mode)

OPERATION

The luminaire should be connected to the mains supply for a minimum of 24 hours before operating in emergency mode as the batteries need to be fully charged before they will provide their full rated duration.

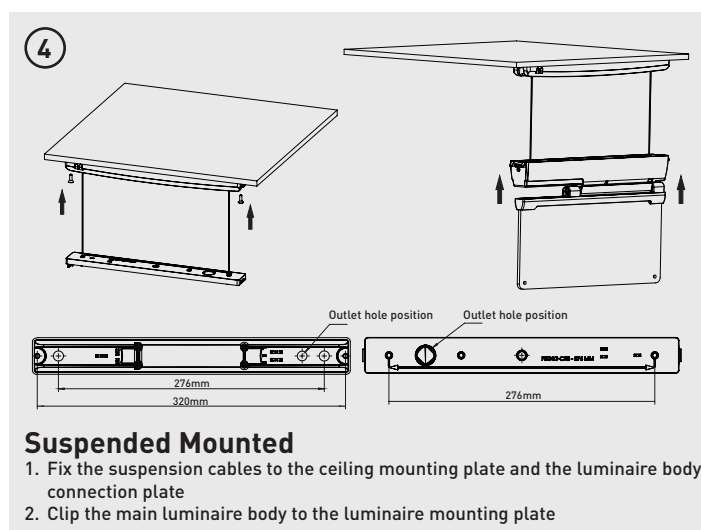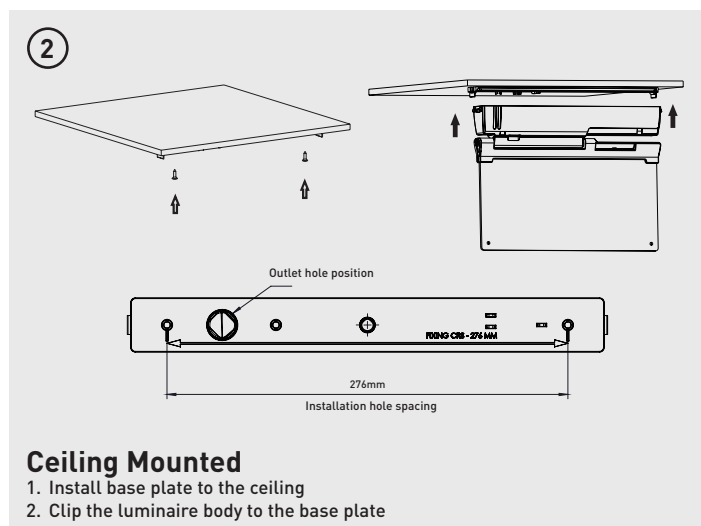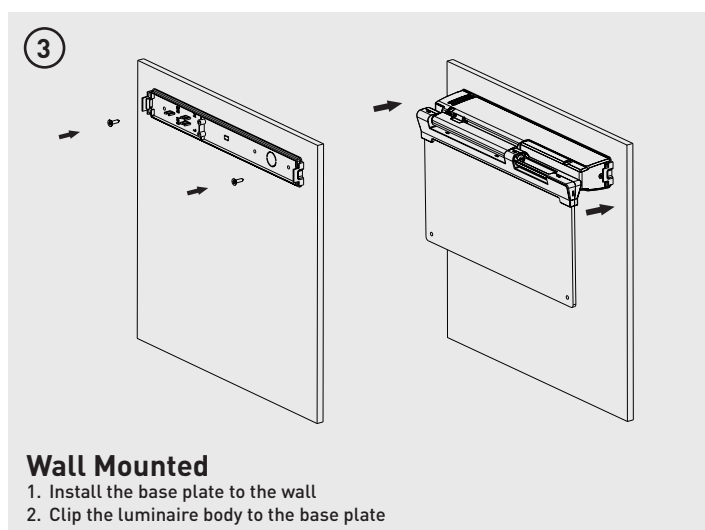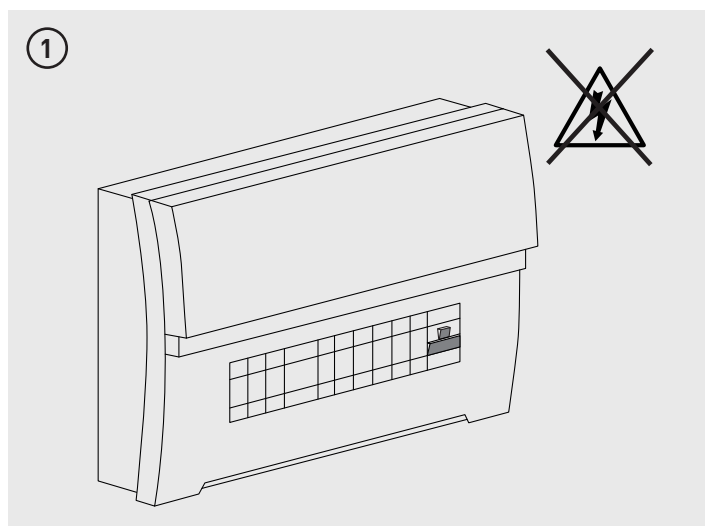

Tech Help Line

UK - 0330 0249 279

Non UK - +44 (0)1952 238 100

Supplied by LUCECO

Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Visit our website at www.luceco.com

Servicio de asistencia telefónica

UK - 0330 0249 279


Non UK - +34 93 829 55 74

(EU) Luceco SE

C/Bobinadora 1-5 08302 Mataró
Barcelona, Spain

Visite nuestra web en www.luceco.com


5

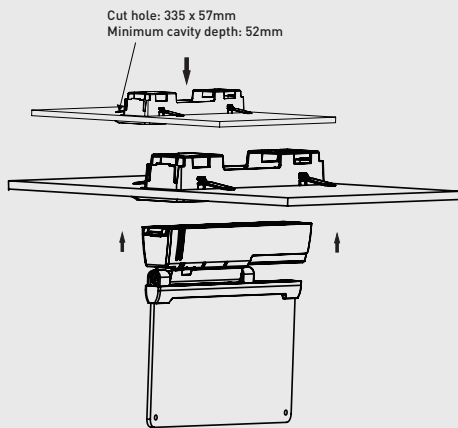

Recessed Mounted

1. Install the recessing mounting kit into the correct sized hole
2. Connect the wire into the luminaire, and fix the luminaire into recessing mounting kit


6

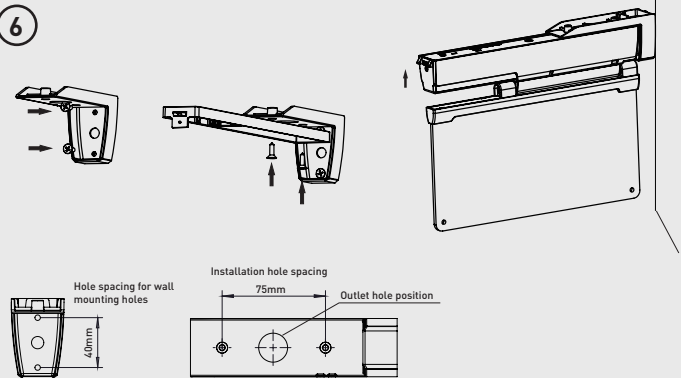

Wall Flag Mounted

1. Install the flag mounting kit on to the wall
2. Fix the base plate with the flag mounting kit with screws
3. Clip the luminaire main body into the base plate securely


7

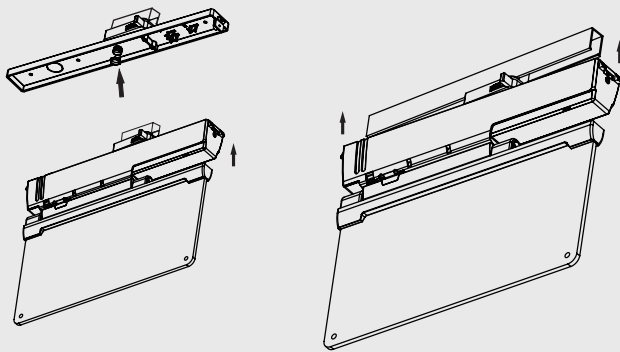


Track Mounted

1. Fix the base plate onto the track adaptor
2. After wiring, fix the luminaire main body into the base plate
3. Clip the luminaire main body onto the base plate securely


8

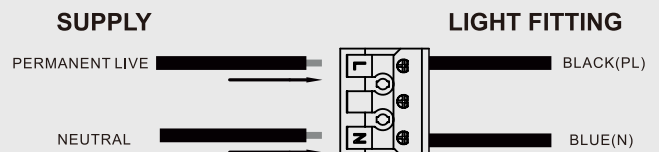

9

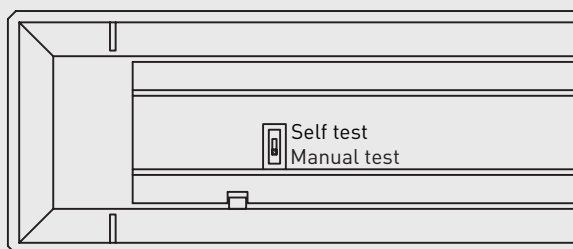

10

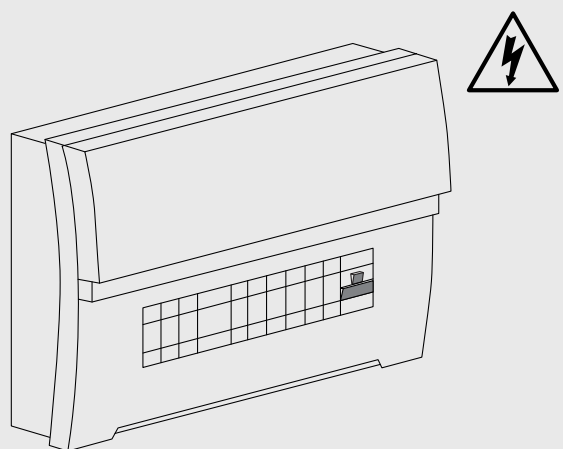

Tech Help Line

UK - 0330 0249 279

Non UK - +44 (0)1952 238 100

Supplied by LUCECO

Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Visit our website at www.luceco.com

Servicio de asistencia telefónica

UK - 0330 0249 279

Non UK - +34 93 829 55 74

(EU) Luceco SE

C/Bohinadora 1-5 08302 Mataró
Barcelona, Spain

Visite nuestra web en www.luceco.com

LEMDEBM3 Emergency Lighting

Tempus Exit Blade

RECOMMENDED ROUTINE PROCEDURE

The following test is designed to ensure the continued protection of your premises and occupants. Because of the possibility of a failure of the normal lighting supply occurring shortly after a period of testing, all tests should, whenever possible, be undertaken at times of least risk, e.g. during daylight hours.

ONCE A MONTH

Each unit should be energized from its battery for about 30 seconds by simulation of a failure of the normal lighting supply to ensure the lamp operates in the emergency condition.

ONCE A YEAR

Each unit should be energized from its battery for a 3 hour discharge test.

ONCE A DAY

Visual inspection of battery charge LED.

ROUTINE TEST RECORD

Month	Test	First Year		Second Year		Third Year		Fourth Year		Fifth Year	
		Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
1	Function										
2	Function										
3	Function										
4	Function										
5	Function										
6	Function										
7	Function										
8	Function										
9	Function										
10	Function										
11	Function										
12	Function										

Tech Help Line

UK - **0330 0249 279**

Non UK - **+44 (0)1952 238 100**

Supplied by LUCECO

Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Visit our website at **www.luceco.com**

Servicio de asistencia telefónica

UK - **0330 0249 279**

Non UK - **+34 93 829 55 74**

(EU) Luceco SE

C/ Bobinadora 1-5 08302 Mataró
Barcelona, Spain

Visite nuestra web en **www.luceco.com**