

## IP65 On/off PIR Motion Sensor (High-bay)

### LPCBHMPIRM65-02 (HC049S)

On/off Bolt-on/Batten-fit PIR Sensor



## Product Description

LPCBHMPIRM65-02 (HC049S) is a high-bay PIR on/off motion sensor, with capability of up to 1.5m installation height. LPCBHMPIRM65-02 (HC049S) has a daylight sensor built-in, and is specifically designed for mounting onto a batten style luminaire. All sensor parameters can be programmed through remote controller LPCUHC-02 (HRC-11).



## Features

- IP65
- Fixing washers accessory
- High-bay (up to 1.5m height)
- Remote controllable
- 5-year warranty, designed for long lifetime up to 50,000 hours

## Technical Specifications

### Input Characteristics

Model No.	LPCBHMPIRM65-02 (HC049S)
Operating voltage	220 ~ 240VAC 50/60Hz
Stand-by power	<0.5W
Load ratings	400VA (capacitive) 800W (resistive)
Warming-up	30s

### Safety and EMC

EMC standard (EMC)	EN55015, EN61547 EN61000-3-21-3-3
Safety standard (LVD)	EN61347-1, EN61347-2-11
Certification	ENEC, CE, EMC, LVD, RCM

### Sensor Data

Model No.	LPCBHMPIRM65-02 (HC049S)
Sensor principle	PIR detection
Detection range*	Max installation height: 1.5m (forklift) 1.2m (single person) Max detection range: 1.6m (diameter)
Detection angle	360°

\* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.



### Environment

Operation temperature*	Ta: -35°C* ~ +50°C
IP rating	IP65


\* When used in -35°C ~ -20°C environment, the sensor still functions but the detection range & life-span would be compromised. The optimal Ta would be -20°C ~ +50°C and we apply 5-year guarantee for such usage condition.




# Mechanical Structure & Dimensions

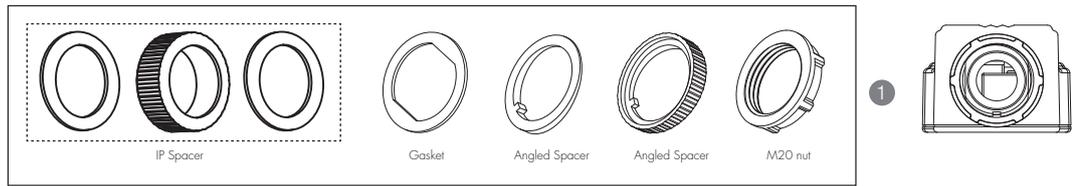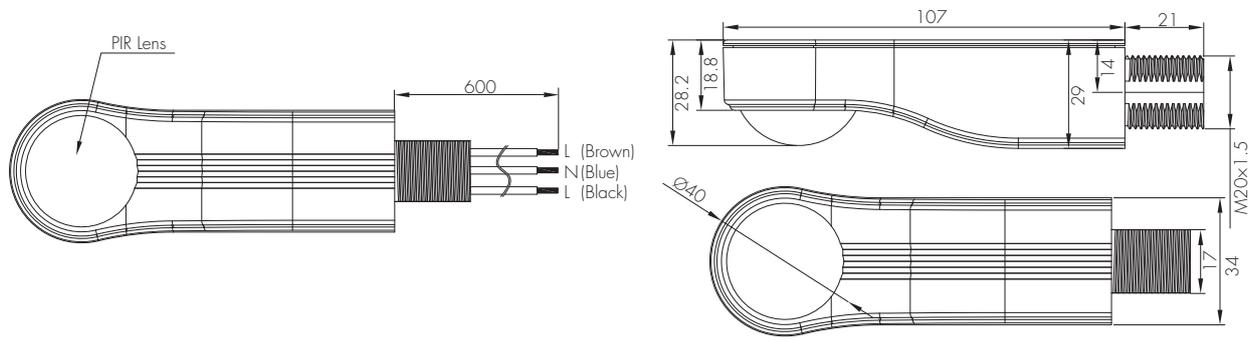


Typical Installation 1

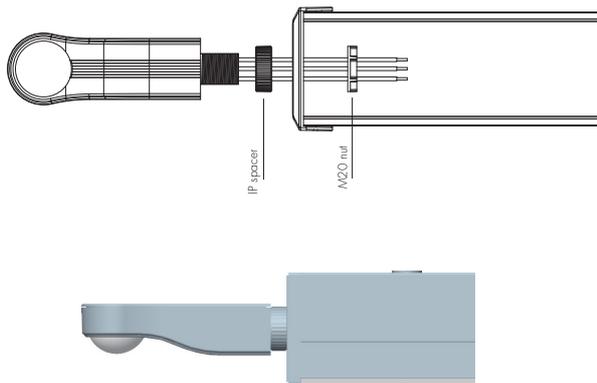

Typical Installation 2

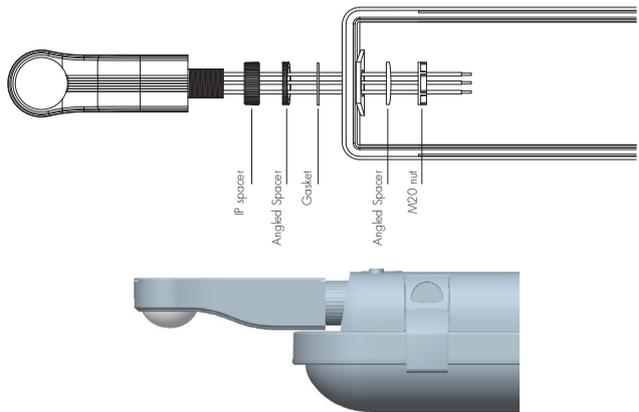

# Wiring Diagram

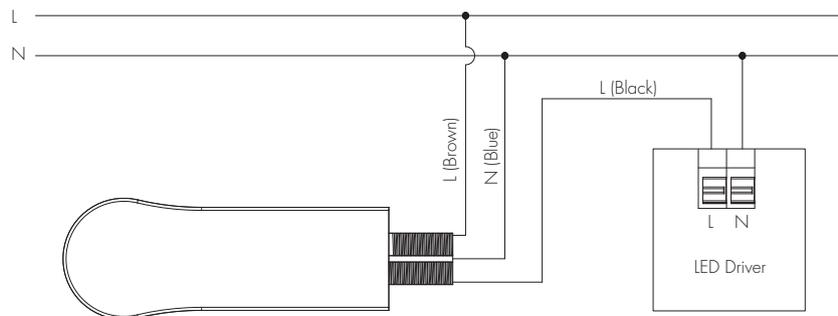


## Functions and Features

### On/off Control

This sensor is a motion switch, which turns on the light upon detection of motion, and turns off after a pre-selected hold-time when there is no movement. A daylight sensor is also built in to prevent the light from switching on when there is sufficient natural light.



With sufficient natural light, the light does not switch on when presence is detected.

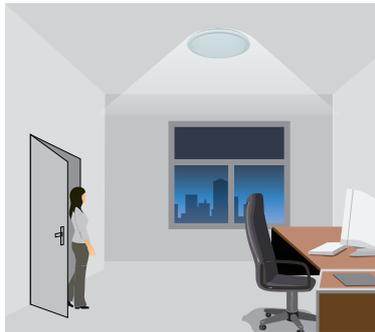


With insufficient natural light, the sensor switches on the light automatically when presence is detected.



The sensor switches off the light automatically after the hold-time when there is no motion detected.

## Detection Pattern

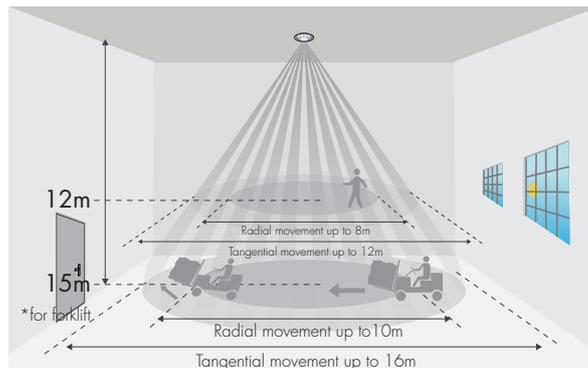

\*The detection patterns are based upon 5km/h movement speed.

## Settings (Remote Control LPCUHC-02/HRC-11)



### Permanent ON/OFF function

Press button "ON/OFF" to select permanent ON or permanent OFF mode.

\* Press button "AUTO", "RESET" to quit this mode.

The mode will change to AUTO Mode after power failure.



### Reset Settings

Press button "RESET", all settings go back to factory default settings.

Hold-time: 5min, daylight threshold: 2lux



### Shift Button

Press button "Shift", the LED on the top left corner is on to indicate mode selection. All values / settings in RED are valid for 20 seconds.



### AUTO mode

Press button "AUTO" to initiate automatic mode. The sensor starts working and all settings remain as before the light is switched ON/OFF.

Note: the function of Semi-auto is disabled.



### Scene program - 1-key commissioning

1. Press button "Start" to program.
2. Select the buttons in "Daylight threshold", "Hold-time", "Stand-by time", "Stand-by dimming level" to set all parameters.
3. Press button "Memory" to save all the settings programmed in the remote control.
4. Press button "Apply" to set the settings to each sensor unit(s).

For example, to set daylight threshold Disable, hold-time 5min, the steps should be: Press button "Disable", "Shift", "5min", "Memory". By pointing to the sensor unit(s) and pressing "Apply", all settings are passed on the sensor(s).

### Daylight threshold

Press buttons in zone "Daylight threshold" to set daylight sensor at 2Lux/ 10Lux / 50Lux / 100Lux/ 300Lux/ 500Lux or Disable.

### Ambient daylight threshold

1. Press button "Shift", the red LED starts to flash.
2. Press button "Ambient", the surrounding lux level is sampled and set as the new daylight threshold.


### Hold-time

Press buttons in zone "hold-time" to set the hold-time at 2s / 30s / 1min / 5min / 10min / 15min / 20min / 30min.

Note: 1. To set hold-time at 30s / 5min / 15min / 30min, press "Shift" button first.

2. 2s is for testing purpose only, stand-by period and daylight sensor settings are disabled in this mode.

\*To exit from Test mode, press button "RESET" or any button in "Hold-time".

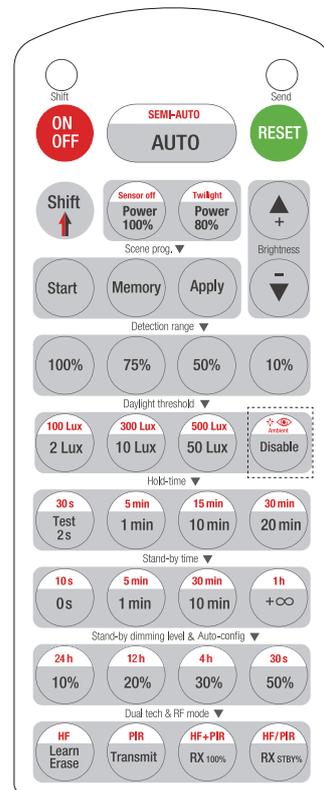

LPCUHC-02  
HRC-11

Load Indication:

The light will flash ONCE rapidly after receiving the command from the remote control successfully.