



trailing socket BASICS



POWER

provides power where you need it most

FEATURES

- White moulded trailing socket
- Manufactured from high quality ABS material
- Rewireable
- Single socket
- Power indicator
- Manufactured to BS1363-2




PRODUCT IMAGES



SS

LINE DIAGRAMS

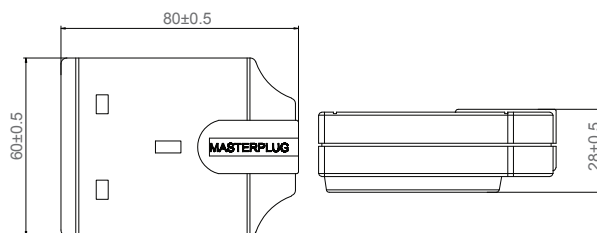

PRODUCT INFORMATION

| | |
|--------------------|---------------------------------------|
| Part Number | SS |
| Product Dimensions | Height 28mm x Width 60mm x Depth 80mm |
| Sockets | 1 |

TECHNICAL SPECIFICATIONS

| | |
|---|--|
| Standard(s) | This product is certified to applicable British safety standards BS1363-2 |
| Wall Mounting Option | No |
| Maximum Load (Wattage) | 10A : 2400 Watts, 240 Volts. 13A : 3120 Watts, 240 Volts |
| IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN | |



SAFETY WARNING

Please read carefully and use in accordance with our safety instructions below:
The total maximum load must not exceed 13 amps/3120 watts.
Ensure that the plug fitted is to BS1363/A and fitted with a 13 amp fuse.

WIRING INSTRUCTIONS

Use only 1.25mm or 1.5mm sq. 3 core flexible cable.
Prepare cable as shown in **Figure 2**.
Ensure unit is totally disconnected from mains.
Remove terminal cover and cord grip by undoing the screws.
Connect the correct coloured wire to the appropriate terminal as shown in **Figure 1** and ensure that the terminal screws are tightened securely.
Ensure that the cable sheath is securely clamped using the cord grip as shown in **Figure 1**.


Replace terminal cover making sure of correct fit and tighten screws securely.

For Your Safety

Wiring should be in accordance with these diagrams.

Figure 1
Wiring arrangement

The long Earth is there for your protection.



DO NOT CUT THE EARTH WIRE SHORT

Figure 2
Cable preparation



E - Green/Yellow
N - Blue
L - Brown