


PRODUCT-DETAILS

MS132-4.0

MS132-4.0 Manual Motor Starter 2.5 ... 4.0 A

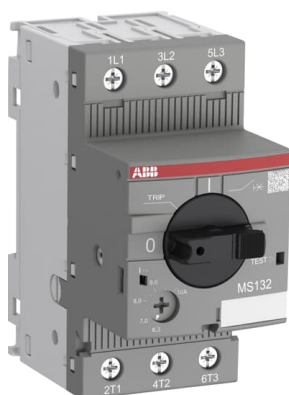

Informations générales

Extension du type de produit	MS132-4.0
Code de produit	1SAM350000R1008
EAN	4013614400087
Description courte	MS132-4.0 Manual Motor Starter 2.5 ... 4.0 A

Description longue

The MS132-4.0 manual motor starter (also known as motor protection circuit breaker or manual motor protector) is a compact 45 mm width device with a rated operational current of $I_e = 4.00$ A. This device is used to manually switch on and off motors and to protect them reliably and without the need for a fuse from short-circuits, overload and phase failures. The manual motor starter offers a rated service short-circuit breaking capacity $I_{cs} = 100$ kA at 400 VAC and trip class 10. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. The handle is lockable to protect against unauthorized changes. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, 3-phase bus bars, power in-feed blocks and terminal spacers are available as accessory.

Commande

Quantité minimum	1 pièce
Code douanier	85362010

Downloads Préférés

Fiche produit, informations techniques	2CDC131021D0202
--	-----------------

Instructions et manuels	2CDC131022M6802
Instructions et manuels (Partie 2)	2CDC131060M0202
Ex Operating Instructions	2CDC131063M6801
Time-Current Characteristic Curve	1SAM300505F0108
I ² t Characteristic	1SAM300507F0001 1SAM300507F0003
Cut-off Current Characteristic	1SAM300508F0001 1SAM300508F0003
CAD Dimensional Drawing	2CDC001079B0201
Schéma dimensionnel	1SAM300402F0001

Dimensions

Produit Largeur Net	45 mm
Produit Hauteur Net	90 mm
Produit Longueur Net	86.75 mm
Poids net	0.265 kg

Technique

Pouvoir assigné de coupeure de service en court-circuit (I _{cs})	(230 V AC) 100 kA (250 V DC) 3 Poles in Series 10 kA (400 V AC) 100 kA (440 V AC) 30 kA (500 V AC) 20 kA (690 V AC) 3 kA
Pouvoir assigné de coupeure ultime en court- circuit (I _{cu})	(230 V AC) 100 kA (400 V AC) 100 kA (440 V AC) 30 kA (500 V AC) 20 kA (690 V AC) 3 kA
Courant assigné instantané de réglage de court-circuit (I _i)	50 A
Setting Range	2.5 ... 4.0 A
Puissance assignée d'emploi AC-3 (P _e)	(400 V) Three Phase 1.5 kW
Puissance assignée d'emploi AC-3e (P _e)	(400 V) Three Phase 1.5 kW
Tension	Circuit principal 690 V AC Circuit principal 250 V DC
Courant nominal de fonctionnement (I _e)	4 A
Courant assignée d'emploi AC-3 (I _e)	4 A
Courant assignée d'emploi AC-3e (I _e)	4 A
Courant assignée d'emploi DC-5 (I _e)	4 A
Fréquence assignée (f)	Circuit principal 50 Hz Circuit principal 60 Hz
Operating Frequency (f _{sw})	0 ... 400 Hz
Tension assignée de tenue aux chocs (U _{imp})	Circuit principal 6 kV
Tension assignée d'isolement (U _i)	690 V

Power Loss	at Rated Operating Conditions per Pole 0.7 ... 1.8 W
Nombre de pôles	3
Courant thermique conventionnel à l'air libre (I_{th})	Main Circuit 4 A
Indice de protection	Housing IP20 Main Circuit Terminals IP10
Degré de pollution	3
Electrical Durability	50000 cycle
Durabilité mécanique	100000 cycle
Type de borne	Screw Terminals
Connecting Capacity Main Circuit	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible 1/2x 0.75 ... 2.5 mm ² Rigid 1/2x 1 ... 4 mm ²
Couple de serrage	Main Circuit 0.8 ... 1.2 N·m
Wire Stripping Length	Main Circuit 9 mm
Recommended Screw Driver	Pozidriv 2
Type d'encastrement	1 ... 6
Montage sur rail DIN	TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715 TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715
Minimum Mounting Distance	Electrical Conductive Board, Horizontal - Up to 400 V 0 mm Electrical Conductive Board, Horizontal - Up to 690 V 1.5 mm Electrical Conductive Board, Vertical 75 mm Other Device Same Type, Horizontal 0 mm Other Device Same Type, Vertical 150 mm
Actuator Type	Rotary Handle
Contact Position Indication	ON / OFF / TRIP
Normes et standards	IEC/EN 60947-1 IEC/EN 60947-2 IEC/EN 60947-4-1 UL 60947-1 UL 60947-4-1
Remarques	UL508 Self-Protected Combination Motor Controller (Type E) in combination with feeder block S1-M3-xx

Technique UL/CSA

Short-Circuit Current Rating (SCCR)	Manual Self-Protected Combination Controllers (Type E), (480Y / 277 V AC) 65 kA Manual Self-Protected Combination Controllers (Type E), (600Y / 347 V AC) 47 kA Any UL Listed Fuses or Circuit-Breakers, Group Installations (480 V AC) 65 kA Any UL Listed Fuses or Circuit-Breakers, Group Installations (600 V AC) 47 kA Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (480 V AC) 65 kA Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (600 V AC) 47 kA Any UL Listed Fuses or Circuit-Breakers, Tap Conductor Protection in Group Installations (480Y / 277 V AC) 65 kA Any UL Listed Fuses or Circuit-Breakers, Tap Conductor Protection in Group Installations (600Y / 347 V AC) 47 kA
Maximum Operating Voltage UL/CSA	Circuit principal 600 V AC
Puissance nominale UL/CSA	(200 V AC) Three Phase 0.75 Hp (208 V AC) Three Phase 0.75 Hp (220 ... 240 V AC) Three Phase 1 Hp (440 ... 480 V AC) Three Phase 2 Hp (550 ... 600 V AC) Three Phase 3 Hp
Full Load Amps Motor Use	(200 V AC) Three Phase 4 A (208 V AC) Three Phase 4 A (220 ... 240 V AC) Three Phase 4 A (440 ... 480 V AC) Three Phase 4 A (550 ... 600 V AC) Three Phase 3.9 A
Locked Rotor Amps	(200 V AC) Three Phase 24 A (208 V AC) Three Phase 24 A

(220 ... 240 V AC) Three Phase 24 A
 (440 ... 480 V AC) Three Phase 24 A
 (550 ... 600 V AC) Three Phase 25.6 A

General Use Rating UL/CSA	(600 V AC) 4 A
Connecting Capacity Main Circuit UL/CSA	Flexible 1/2x 16-12 AWG Stranded 1/2x 16-12 AWG
Tightening Torque UL/CSA	Main Circuit 10 ... 12 in-lb

Environnement

Température de l'air ambiant	Around the Enclosure 0 ... +40 °C Operation -25 ... +70 °C Operation Compensated -25 ... +60 °C Storage -50 ... +80 °C
Ambient Air Temperature Compensation	Oui
Altitude de fonctionnement maximale autorisée	2000 m
REACH Declaration	1SAA963005-4502
Résistance aux chocs selon CEI 60068-2-27	11 ms Pulse 25g
Resistance to Vibrations acc. to IEC 60068-2-6	5g / 3 ... 150 Hz
Informations RoHS	1SAA963006-4502
Statut RoHS	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Certificats et Déclarations (Numéro de document)

Certificat ABS	1SAA963001-0101
Certificat ATEX	1SAA963000-3902
Certificat BV	1SAA963001-0202
CB Certificate	1SAA963002-2002
CQC Certificate	CQC2010010307387700 CQC2019010307243864
Cut-off Current Characteristic	1SAM300508F0001 1SAM300508F0003
Declaration of Conformity - CCC	2020980307003526 2020980307003041
Déclaration de Conformité - CE	1SAD101100-3402
Declaration of Conformity - UKCA	1SAD201100-3402
DNV GL Certificate	1SAA963001-0304
EAC Certificate	1SAA963000-2701
I _t Characteristic	1SAM300507F0001 1SAM300507F0003
IECEX Certificate	1SAA963000-4001
KC Certificate	1SAA963002-1502
Certificat LR	1SAA963001-0502
Certificat RINA	1SAA963002-0802
Certificat RMRS	1SAA918000-0704
Certificat UL	E137861-20090225 E345003-20090225

Emballage

Emballage Niveau 1 Unités	box 1 pièce
Emballage Niveau 1 Largeur	92 mm
Emballage Niveau 1 Longueur	95 mm
Emballage Niveau 1 Hauteur	50 mm
Emballage Niveau 1 Poids	0.28 kg
Emballage Niveau 1 EAN	4013614400087
Emballage Niveau 2 Unités	carton 40 pièce
Emballage Niveau 2 Largeur	280 mm
Emballage Niveau 2 Longueur	395 mm
Emballage Niveau 2 Hauteur	210 mm
Emballage Niveau 2 Poids	11.586 kg
Emballage Niveau 2 EAN	4013614408984

Classifications

Code de classification d'objet	F
ETIM 4	EC000074 - Motor protective circuit-breaker
ETIM 5	EC000074 - Motor protective circuit-breaker
ETIM 6	EC000074 - disjoncteur/démarrreur de moteur
ETIM 7	EC000074 - Motor protection circuit-breaker
ETIM 8	EC000074 - Motor protection circuit-breaker
eClass	V11.0 : 27370401
UNSPSC	39121521
Code de catégorie granulaire IDÉA (IGCC)	4731 >> Manual Starters
E-Number (Finland)	3705992
E-Number (Sweden)	3112124

Accessories

Identifiant	Description	Type	Quantity	Unit Of Measure
1SAM201901R1001	HKF1-11 Auxiliary Contact	HKF1-11	1	piece
1SAM201901R1201	HKF1-11K Auxiliary Contact	HKF1-11K	1	piece
1SAM201901R1002	HKF1-20 Auxiliary Contact	HKF1-20	1	piece
1SAM201901R1202	HKF1-20K Auxiliary Contact	HKF1-20K	1	piece
1SAM201901R1004	HKF1-01 Auxiliary Contact	HKF1-01	1	piece
1SAM201901R1003	HKF1-10 Auxiliary Contact	HKF1-10	1	piece
1SAM201902R1002	HK1-20 Auxiliary Contact	HK1-20	1	piece
1SAM201902R1202	HK1-20K Auxiliary Contact	HK1-20K	1	piece
1SAM201902R1001	HK1-11 Auxiliary Contact	HK1-11	1	piece
1SAM201902R1201	HK1-11K Auxiliary Contact	HK1-11K	1	piece
1SAM201902R1003	HK1-02 Auxiliary Contact	HK1-02	1	piece
1SAM201902R1203	HK1-02K Auxiliary Contact	HK1-02K	1	piece

1SAM201902R1004	HK1-20L Auxiliary Contact	HK1-20L	1	piece
1SAM201902R1204	HK1-20LK Auxiliary Contact	HK1-20LK	1	piece
1SAM201903R1002	SK1-20 Signaling Contact	SK1-20	1	piece
1SAM201903R1202	SK1-20K Signaling Contact	SK1-20K	1	piece
1SAM201903R1005	SK1-20AR Signaling Contact	SK1-20AR	1	piece
1SAM201903R1205	SK1-20ARK Signaling Contact	SK1-20ARK	1	piece
1SAM201903R1001	SK1-11 Signaling Contact	SK1-11	1	piece
1SAM201903R1201	SK1-11K Signaling Contact	SK1-11K	1	piece
1SAM201903R1004	SK1-11AR Signaling Contact	SK1-11AR	1	piece
1SAM201903R1204	SK1-11ARK Signaling Contact	SK1-11ARK	1	piece
1SAM201903R1003	SK1-02 Signaling Contact	SK1-02	1	piece
1SAM201903R1203	SK1-02K Signaling Contact	SK1-02K	1	piece
1SAM201903R1006	SK1-02AR Signaling Contact	SK1-02AR	1	piece
1SAM201903R1206	SK1-02ARK Signaling Contact	SK1-02ARK	1	piece
1SAM301901R1002	CK1-20 Short Circuit Signaling Contact	CK1-20	1	piece
1SAM301901R1001	CK1-11 Short Circuit Signaling Contact	CK1-11	1	piece
1SAM301901R1003	CK1-02 Short Circuit Signaling Contact	CK1-02	1	piece
1SAM201910R1001	AA1-24 Shunt Trip	AA1-24	1	piece
1SAM201910R1002	AA1-110 Shunt Trip	AA1-110	1	piece
1SAM201910R1003	AA1-230 Shunt Trip	AA1-230	1	piece
1SAM201910R1004	AA1-400 Shunt Trip	AA1-400	1	piece
1SAM201904R1010	UA1-20 Undervoltage Release	UA1-20	1	piece
1SAM201904R1001	UA1-24 Undervoltage Release	UA1-24	1	piece
1SAM201904R1002	UA1-48 Undervoltage Release	UA1-48	1	piece
1SAM201904R1003	UA1-60 Undervoltage Release	UA1-60	1	piece
1SAM201904R1004	UA1-110 Undervoltage Release	UA1-110	1	piece
1SAM201904R1008	UA1-208 Undervoltage Release	UA1-208	1	piece
1SAM201904R1005	UA1-230 Undervoltage Release	UA1-230	1	piece
1SAM201904R1006	UA1-400 Undervoltage Release	UA1-400	1	piece
1SAM201904R1007	UA1-415 Undervoltage Release	UA1-415	1	piece
1SAM201904R1009	UA1-575 Undervoltage Release	UA1-575	1	piece
1SAM201906R1102	PS1-2-0-65 Busbar	PS1-2-0-65	1	piece
1SAM201906R1112	PS1-2-1-65 Busbar	PS1-2-1-65	1	piece
1SAM201906R1122	PS1-2-2-65 Busbar	PS1-2-2-65	1	piece
1SAM201916R1103	PS1-3-0-100 Busbar	PS1-3-0-100	1	piece
1SAM201906R1103	PS1-3-0-65 Busbar	PS1-3-0-65	1	piece
1SAM201916R1113	PS1-3-1-100 Busbar	PS1-3-1-100	1	piece
1SAM201906R1113	PS1-3-1-65 Busbar	PS1-3-1-65	1	piece
1SAM201916R1123	PS1-3-2-100 Busbar	PS1-3-2-100	1	piece
1SAM201906R1123	PS1-3-2-65 Busbar	PS1-3-2-65	1	piece
1SAM201916R1104	PS1-4-0-100 Busbar	PS1-4-0-100	1	piece
1SAM201906R1104	PS1-4-0-65 Busbar	PS1-4-0-65	1	piece
1SAM201916R1114	PS1-4-1-100 Busbar	PS1-4-1-100	1	piece
1SAM201906R1114	PS1-4-1-65 Busbar	PS1-4-1-65	1	piece
1SAM201906R1124	PS1-4-2-65 Busbar	PS1-4-2-65	1	piece
1SAM201916R1105	PS1-5-0-100 Busbar	PS1-5-0-100	1	piece
1SAM201906R1105	PS1-5-0-65 Busbar	PS1-5-0-65	1	piece
1SAM201916R1115	PS1-5-1-100 Busbar	PS1-5-1-100	1	piece
1SAM201906R1115	PS1-5-1-65 Busbar	PS1-5-1-65	1	piece
1SAM201906R1125	PS1-5-2-65 Busbar	PS1-5-2-65	1	piece
1SAM201907R1101	S1-M1-25 Power Infeed Block	S1-M1-25	1	piece

1SAM201907R1102	S1-M2-25 Power Infeed Block	S1-M2-25	1	piece
1SAM201907R1103	S1-M3-25 Power Infeed Block	S1-M3-25	1	piece
1SAM201913R1103	S1-M3-35 Power Infeed Block	S1-M3-35	1	piece
1SAM201914R1002	S1-PB1-25 Power Infeed Block	S1-PB1-25	1	piece
1SAM301911R1001	TS1-M3-S1 Terminal Spacer	TS1-M3-S1	1	piece
1SAM301912R1001	TS1-M3-S2 Terminal Spacer	S1-M3-S2	1	piece
1SAM201908R1001	BS1-3 Protection Cover	BS1-3	1	piece
1SAM201909R1001	FS116 Screw Fixing Kit	FS116	1	piece
1SAM201914R1001	PB1-1-32 Connecting Link	PB1-1-32	1	piece
GJF1101903R0002	SA2 Terminals and Installation Material	SA2	1	piece
1SAM201911R1012	IB132-F Enclosure	IB132-F	1	piece
1SAM201911R1010	IB132-G Enclosure	IB132-G	1	piece
1SAM201911R1011	IB132-Y Enclosure	IB132-Y	1	piece
1SAM201912R1010	DMS132-G Door Mounting Kit	DMS132-G	1	piece
1SAM201912R1011	DMS132-Y Door Mounting Kit	DMS132-Y	1	piece
1SAM201909R1021	MSAH1 Shaft Supporter	MSAH1	1	piece
1SAM201920R1011	MSHD-LTB Handles	MSHD-LTB	1	piece
1SAM201920R1012	MSHD-LTY Handles	MSHD-LTY	1	piece
1SAM101923R0002	MSMN Driver	MSMN	1	piece
1SAM101923R0012	MSMNO Driver	MSMNO	1	piece
1SCA101647R1001	OXS6X85 SHAFT	OXS6X85	1	piece
1SCA108043R1001	OXS6X105 SHAFT	OXS6X105	1	piece
1SCA101655R1001	OXS6X130 SHAFT	OXS6X130	1	piece
1SCA101659R1001	OXS6X180 SHAFT	OXS6X180	1	piece

Catégories

Produits basse tension → Disjoncteurs de puissance → Disjoncteurs-moteurs

Produits basse tension → Produits de Contrôle, Protection et sécurité machines → Disjoncteurs-moteurs → Disjoncteurs-moteurs

