



# Fixture Hanger Bracket and Accessories

UNILETS® for use with Threaded Metal Conduit.

NEC/CEC:  
Rated for Ordinary (Unclassified) Locations

POLES/HANGERS: NEC/CEC EXPLOSIONPROOF FLEXIBLE FIXTURE HANGERS

	NPT Size (Inches)	Support Weight kg (lbs)	Catalog Number
<b>Fixture Hanger Brackets</b>			
	3/4	90.0 (200)	<b>FHS1</b>
 <p>Ceiling Mount Projects light downward (90°). Shown mounted to Appleton AH260-118 explosionproof fluorescent lighting fixture.</p>			
 <p>Wall Mount Projects light at 45° angle. Shown mounted to Appleton AH260-118 explosionproof fluorescent lighting fixture.</p>			
<b>Safety Support Hooks and Rigid Support for Dummy Side of Lighting Fixtures</b>			
 <p>Installation View</p>	3/4	90.0 (200)	<b>AC-KT</b>
Complete assembly includes two hooks and one rigid support. Each hook supplied with a screw for closing 3/8" jaw opening. Rigid Support straddles max. 1-1/4" conduit. (Chain shown in installation view not furnished.)			
<b>LC Steel Locking Couplings</b>			
 <p>Installation View</p>	3/4	—	<b>SLC75</b>
	1	—	<b>SLC1075</b>
Setscrews with Allen head fasten on outside of hub and fixture stem. Prevents fixture stem from turning in hubs not normally supplied with setscrews. 3/4" fixture stem.			
<b>Safety Support Hooks for Dummy Side of Lighting Fixtures</b>			
Supplied with screw for closing 3/8" jaw opening.			
<b>Male</b>			
 <p>EFHM EFHF</p>	1/2	90.0 (200)	<b>EFHM-50</b>
	3/4		<b>EFHM-75</b>
<b>Female</b>			
	1/2	90.0 (200)	<b>EFHF-50</b>
	3/4		<b>EFHF-75</b>
<b>Rigid Support for Fluorescent Lighting Fixtures (Dummy Side)</b>			
	1/2 and 3/4	157.5 (350)	<b>FHS5075</b>
Will straddle max. 1-1/4" conduit.			

# Fixture Hanger Bracket and Accessories

UNILETS® for use with Threaded Metal Conduit.


**NEC/CEC:**

*Rated for Ordinary (Unclassified) Locations*

---

## Dimensions in Millimeters (Inches) — of FHS1 Fixture Hanger Bracket

---

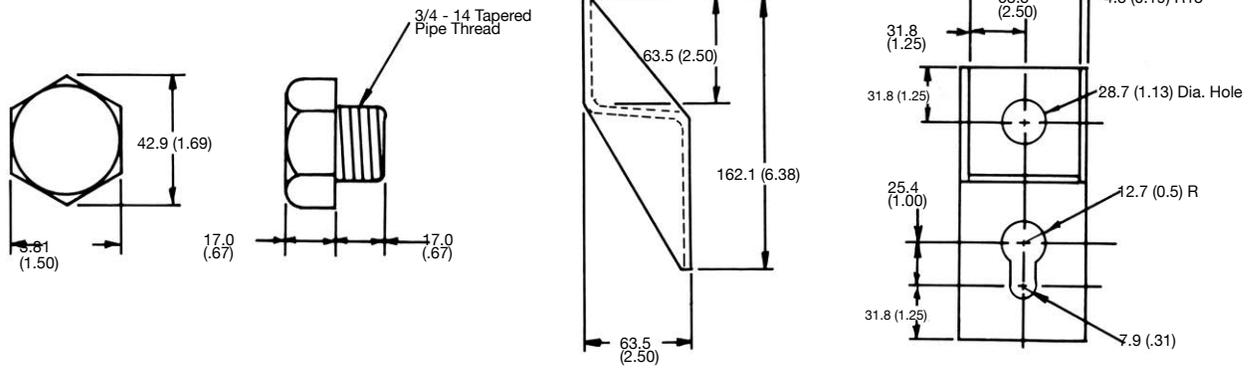

POLES/HANGERS: NEC/CEC EXPLOSIONPROOF FLEXIBLE FIXTURE HANGERS

Appleton®