

**LED ELECTRONIC  
25W POWER SUPPLY**  
by  
**GM Lighting**

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

Universal AC input / full range electronic power supply that features short circuit, overload, and over voltage protection. 12VDC output. 88 - 264 VAC input. 47 - 63Hz frequency range at 79% typical efficiency. 2.1 Amps. 25 Watts.




**PRODUCT SPECIFICATIONS**

**Construction:** Full metal enclosure. No external fusing required. LED indicator for power on. High operating temperature up to 70°C (158°F). Screw terminals.

**Electrical:** Output voltage 12VDC. 110 - 180% rated output power overload protection. Overload recovers automatically after fault condition is removed. Withstands 300VAC surge input for 5 seconds. Utilizes 105°C (221°F) long life electrolytic capacitors.

**Label:** UL listed.

Not rated for outdoor use.

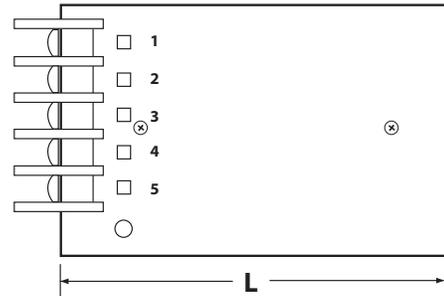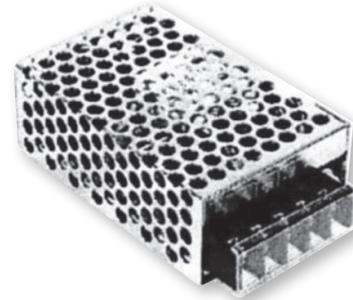

Catalog Number	Max. Wattage	Input Voltage	Output Voltage	Weight	Dimensions		
					L	W	H
LTH-2	25W	120V	12 VDC	6.9 oz.	3-1/2"	2"	1-1/4"

For voltage drop - see [www.gmlighting.net/voltagedrop.html](http://www.gmlighting.net/voltagedrop.html) or consult GM Lighting Product catalog, page 19.



GM Lighting, LLC • 9830 W. 190th St. • Unit F • Mokena, IL 60448  
Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • [www.gmlighting.net](http://www.gmlighting.net)  
e-mail: [gmlightingllc@sbcglobal.net](mailto:gmlightingllc@sbcglobal.net) • Specifications subject to change without notice. LTH2\_032510