


PAR 24**15** RGBW

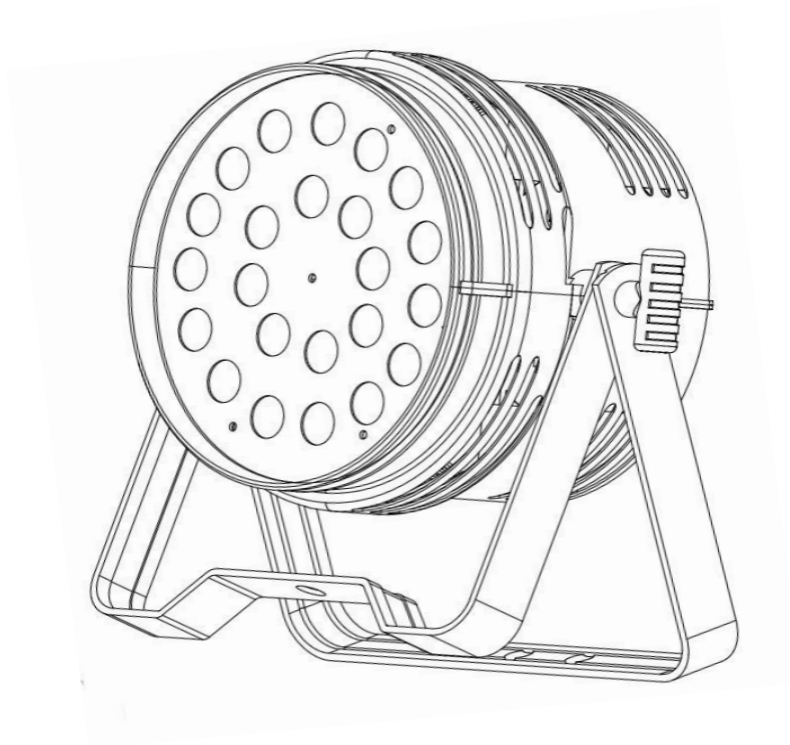

KEEP THIS USER MANUAL FOR FUTURE NEEDS

USER MANUAL

TECHNICAL PARAMETERS

POWER SUPPLY

AC110-240V 50/60 Hz

Power consumption: 200W

24*15W RGBW 4in1 LED

CONTROL & PROGRAMMING

Control mode: DMX512/Manual/Auto/Sound

Dmx channels : 4/8CH

XLR in & out: 3-pin

Display:LED display

PACKING

Size:35x30x32CM

N. W: 5kg

DMX Channel description

8 CH

CH	Function	Description
CH1	All dimmer	Linear dimming, from dark to bright
CH2	R-DIM	R dimming, from dark to bright
CH3	G-DIM	G dimming, from dark to bright
CH4	B-DIM	B dimming, from dark to bright
CH5	W-DIM	W dimming, from dark to bright
CH6	STROBE	RGBW dimming, from dark to bright
CH7	SPEED	FUNCTION SPEED
CH8	FUNCTION	0-50 DMX DIMMER 51-100 COLOR 101-250 CHANGE 251-255 SOUND CONTROL

4 CH

CH	Function	Description
CH1	R-DIM	R dimming, from dark to bright
CH2	G-DIM	G dimming, from dark to bright
CH3	B-DIM	B dimming, from dark to bright
CH4	W-DIM	W dimming, from dark to bright

TECHNICAL PARAMETERS

@Intelligent DMX signal recognition, after connecting to DMX signal, it will automatically transfer to DMX control;

@Intelligent master-slave control, when there are multiple machines in the system in the sending state of the master, the redundant machines can intelligently choose to enter the slave state, so that the master-slave control of the lamps does not enter a chaotic state.

@Double stand handle, self-supporting or hanging;

@Unique optical system design, uniform color mixing effect;

@Ultra-high frequency (32KHz) PWM dimming technology, dimming without shake;

Summarize


First of all, thank you for your trust and purchase of our company's LED series products. For your better safety and better use of this new type of lamp, please read this instruction manual carefully before use, and operate according to the rules, so as to avoid unsafe safety factors and lamp damage caused by misuse.

Notice

1. Please install and test by professional. Non-professional people are strictly prohibited from dismantling the lamps.
2. Turn off the power supply when not using the lamp or cleaning the lamp.
3. Do not use in wet environments (except waterproof lamps) Keep away from combustibles for more than 0.5 meters.
4. Do not look directly at the light from the lamp with naked eyes, it may cause damage to the eyes.
5. Do not change the internal circuit structure of the lamp without permission, which may cause short circuit or burn out of the lamp.

Key operation instructions

1. Key icon:

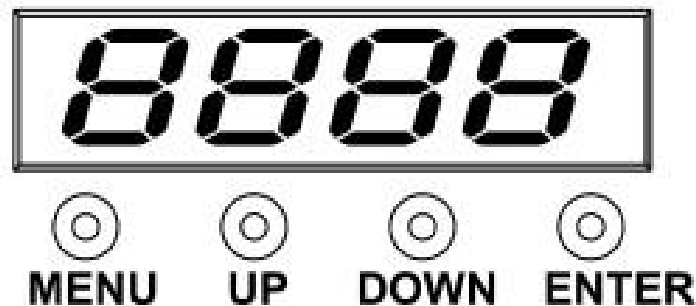

2. Key Description

MENU:

Pressing MENU will cycle out the functions of table (1), the first 1-2 digits of the display represent the function. The last 2-3 digits represent the speed and effect of the function; UP or DOWN to adjust the value; ENTER to confirm.

UP:

Press this button to add, long press for more than 2 seconds to add continuously;

DOWN:

Press this button to reduce, and long press for more than 2 seconds to continuously reduce;

ENTER:

Press this button to save the currently function, and the saved function will automatically run when the machine turned on next time.

NO.	Content	Value	Function and description
1	d001	001- 512	DMX512 Add.set up-UP/DOWN add/reduce value-4CH
2	A001	001- 512	DMX512 Add.set up-UP/DOWN add/reduce value-8CH
3	r255	000-255	R
4	G255	000-255	G

5	b255	000-255	B
6	u255	000-255	W
7	FH99	01-99	Strobe
8	CL01	01-08	8 color change
9	CC99	01-99	Colorful change, from slow to fast.
10	DE99	01-99	Colorful change, from slow to fast.
11	CP99	01-99	Colorful change, from slow to fast.
12	SU01	01-99	Colorful voice control

REMARK

The product has perfect performance and integrity packing. All users should be strictly comply with the warning and operating instructions as stated. Or we aren't in charge of any result by misusing.

Any damage resulting by misuse is not within the Company's warranty.

Any fault or problem caused by neglecting the manual is also not in the charge of dealers.

Errors and omissions for every information given in this manual excepted.

All information is subject to change without prior notice.