


300W LED Fresnel (RGBW)

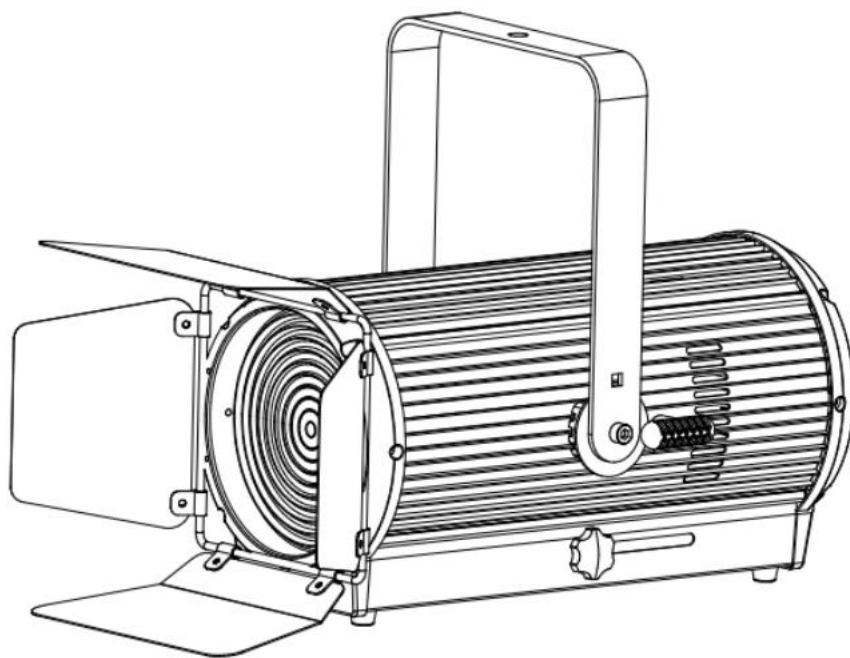

CE RoHS  IP20

USER MANUAL

KEEP THIS USER MANUAL FOR FUTURE NEEDS

1 SAFETY INSTRUCTIONS



CAUTION

Be careful with your operations. With a dangerous voltage you can suffer a dangerous electric shock when touching wires!

This device has left the factory in perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.



IMPORTANT

Damages caused by the disregard of this user manual are not subject to warranty. The dealer will not accept liability for any resulting defects or problems.

If the device has been exposed to temperature changes due to environmental changes, do not switch it on immediately. The arising condensation could damage the device.

Leave the device switched off until it has reached room temperature.

This device falls under protection-class I. Therefore it is essential that the device be earthed.

The electric connection must carry out by qualified person. The device shall only be used with rate voltage and frequency.

Make sure that the available voltage is not higher than stated at the end of this manual.

Make sure the power cord is never crimped or damaged by sharp edges. If this would be the case, replacement of the cable must be done by an authorized dealer.

Always disconnect from the mains, when the device is not in use or before cleaning it. Only handle the power cord by the plug. Never pull out the plug by tugging the power cord.

During initial start-up some smoke or smell may arise. This is a normal process and does not necessarily mean that the device is defective, it should decrease gradually.

Please don't project the beam onto combustible substances.

Fixtures cannot be installed on combustible substances, keep more than 50cm distance with wall for smooth air flow, so there should be no shelter for fans and ventilation for heat radiation.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

2 UNPACKING

Thank you for choosing our 300W LED Fresnel. For your own safety, please read this manual before installing the device. This manual covers the important information on installation and applications. Please install and operate the fixture with following instructions. Meanwhile, please keep this manual well for future needs.

The 300W LED Fresnel is made of a new type of high temperature strength of die cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE&RoHS standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


The 300W LED Fresnel adopts 1PCS 300W COB LED (available for RGBW) which features high brightness and stability. Please carefully unpack it when you receive the fixture and check whether it is damaged during the transportation. And please check whether the following items are included inside the box:

3 FEATURES & SPECIFICATIONS

Feature:

*1X300W COB LED
*50,000 hours life time and low power consumption
*Color Rendering Index(CRI): Ra≥90
*High quality optical system and field uniformity
*High contrast aspheric lens
*Zoom angle: 15°-65°
*CTC linear adjustable
*With RGBW
*Die casting aluminum housing design
*4 Metal spot cutting slots
*4 kinds of dimming curve
*Dimming Frequency: 500HZ - 25000HZ optional
*Strobe :1-25times/sec
*11 DMX channels
*Control Protocol: RDM / DMX , Master/Slave ,Auto run and sound mode
*LCD screen
*Low noise fan with copper liquid cooling system
*Working Temperature: -10℃~40℃
*IP20 protection rating
Specifications:
*Input Voltage:AC100-240V 50/60Hz
*Max. Power :300W
*Dimensions: 577*330*277mm
*Packing Size: 670*380*420mm
*Net Weight: 12.5kg
*Gross Weight: 14kg




SIZE DRAWING

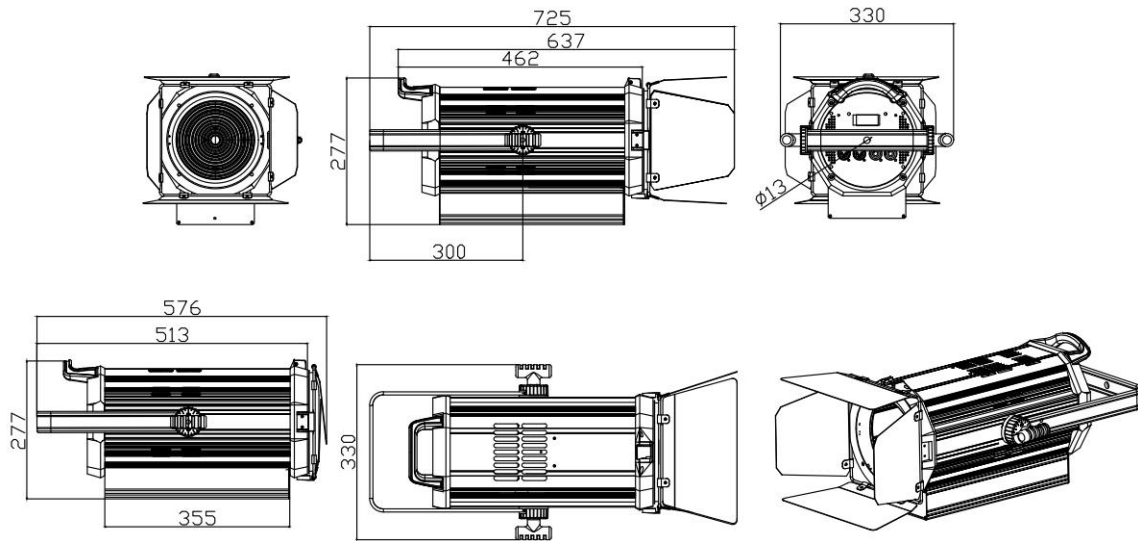


4 DMX-512 CONTROL CONNECTIONS

Connect the provided XLR cable to the female 3-pin XLR output of your controller and the other side to the male 3-pin XLR input of the moving head. You can chain multiple Moving head together through serial linking. The cable needed should be two core, screened cable with XLR input and output connectors. Please refer to the diagram below.

DMX-512 connection with DMX terminator

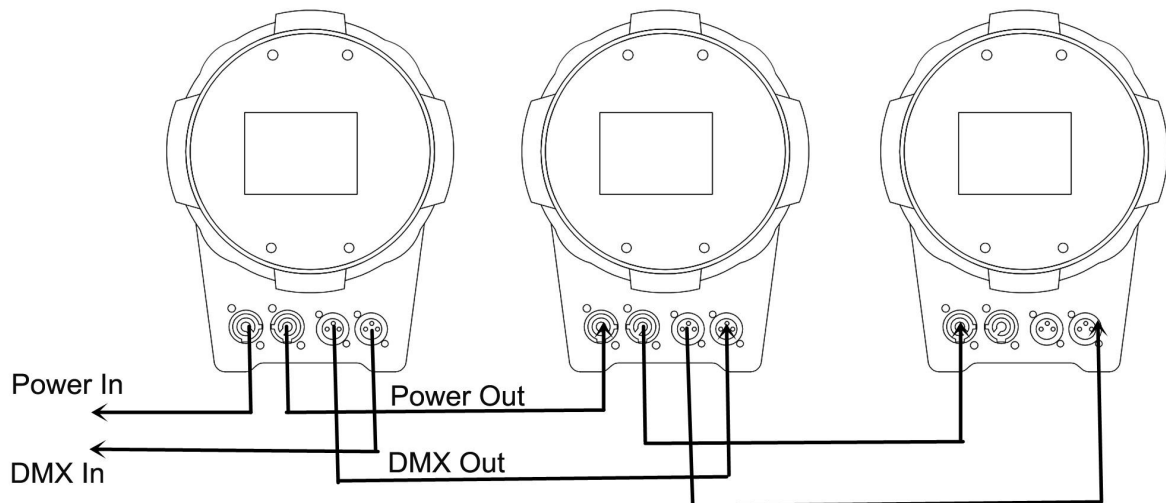

1:Ground
2:Data(-)
3:Data(+)

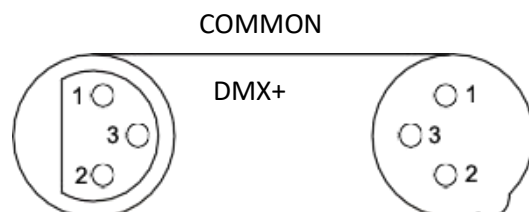


DMX Output
3-Pin XLR

DMX Input
3-Pin XLR

DMX-

DMX512 Out
3-Pin XLR

DMX512 In
3-Pin XLR




Pin3
Pin2

For installations where the DMX cable has to run a long distance or is in an electrically noisy environment, such as in a discotheque, it is recommended to use a DMX terminator. This helps in preventing corruption of the digital control signal by electrical noise. The DMX terminator is simply an XLR plug with a 120 Ω resistor connected between pins 2 and 3, which is then plugged into the output XLR socket of the last fixture in the chain. Please see illustrations below.

5 MAIN MENU

1.Key icon:

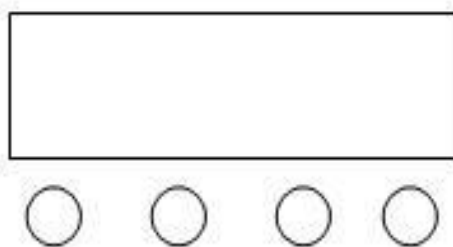

A B C D

B. UP
C. DOWN
D. ENTER

A. Function

Operation instructions: The function key A will circulate different functions. Press B or C to modify the parameter value. Press the D key to confirm.

6 DISPLAY OPERATION DESCRIPTION

NO.	CONTENT	VALUE	DESCRIPTION
1	DMX-ADDR	DMX512 ADD set 001	B/C to adjust ADD, D to save

	001		
2	R-DIM 255	R brightness adjust 0-255	B/C to adjust R brightness,D to save
3	G-DIM 255	G brightness adjust 0-255	B/C to adjust G brightness,D to save
4	B-DIM 255	B brightness adjust 0-255	B/C to adjust B brightness,D to save
5	H-DIM 255	W brightness adjust 0-255	B/C to adjust W brightness,D to save
6	FOCUS 255	Focus 255	B/C to adjust focus distance,D to save
7	PROG 01	Built-in program set 01	B/C to adjust built-in program,D to save
8	SPEED 01	Built-in program speed set 01	B/C to adjust built-in program speed,D to save
9	TEST AUTO	Auto	B/C to select, D to save
10	BACK-LED ON/OFF	BACK-LEDON/OFF	B/C to select back led screen protect,D to save
11	Now Temp	LED Temp show	Show the current working temperature of the LED
12	RESET	Reset	D to reset

7 DMX CHANNELS

NO	FUNCTION	DESCRIPTION
CH1	Focus	0-255,Set focus distance
CH2	All dimming	0— 255,RGBH Linear dimming,from dark to bright
CH3	Strobe	0— 255,RGBH From slow to fast
CH4	R dim	0-255, linear dimming, from dark to bright
CH5	G dim	0-255, linear dimming, from dark to bright
CH6	B dim	0-255, linear dimming, from dark to bright
CH7	H dim	0-255, linear dimming, from dark to bright
CH8	Color select	Color group
CH9	Marco	0-20 no function, 21-255 dispatch average built-in program
CH10	Marco speed	0-255 up speed slower, 0 fastest
CH11	Reset	0-244 no function, 245-255 stay 5 seconds reset

8 OPERATION & SPECIFICATIONS

- The 300W LED Fresnel is an LED fresnel light for on-site decoration purpose.
- Don't turn on the fixture if it's been through severe temperature difference like after transportation because it might damage the light due to the environment changes. So make sure to operate the fixture until it is in normal temperature.
- This light should be keep away from strong shaking during any transportation or movement.
- Don't pull up the light by only the head, or it might cause damages to the mechanical parts.
- Don't expose the fixture in overheat, moisture or environment with too much dust when installing it. And don't lay any power cables on the floor. Or it might cause electronic shock to the people.
- Make sure the installation place is in good safety condition before installing the fixture.
- Make sure to put the safety chain and check whether the screws are screwed properly when installing the fixture.
- Make sure the lens are in good condition. It's recommended to replace the units if there are any damages or severe scratch.
- Make sure the fixture is operated by qualified personnel who knows the fixture before using.
- Keep the original packages if any second shipment is needed.
- Don't try to change the fixtures without any instruction by the manufacturer or the appointed repairing agencies.
- It is not in warranty range if there are any malfunctions from not following the user manual to operate or any illegal operation, like shock short circuit, electronic shock, lamp broke, etc.

9 INSTALLATIONS

For added protection mount the fixtures in areas outside walking paths, seating areas, or in areas where the fixture might be reached by unauthorized personnel.

Before mounting the fixture to any surface, make sure that the installation area can hold a minimum point load of 10 times the device's weight.

Fixture installation must always be secured with a secondary safety attachment, such as an appropriate safety cable.

Never stand directly below the device when mounting, removing, or servicing the fixture.


From a ceiling, or set on a flat level surface (see illustration below). Be sure this fixture is kept at least 0.5m (1.5 ft) away from any flammable materials (decoration etc.).

Please ensure that the led profile spotlight is hung using the appropriate "C" clamp or half cheeseboro. A safety chain or cable should also be used as a secondary point of holding the fixture in case the clamp comes loose. Never hang the fixture without a safety chain or cable.

There is an eye-bolt on the back of the fixture to which the safety chain or cable can threaded through and then hung from the secondary point. Make sure the Gel frame (Gel holder) is clipped into position correctly and cannot come loose.

If you are not qualified or have any doubts about hanging the led profile spotlight then do NOT hang it.

Do not clamp the safety cable to the U bracket or clamp. That is not a secondary safety point.
A secondary safety point is any point that will adequately hold the led profile spotlight if the "C" clamp or half cheesboro fails.
Then the safety cable would be the backup and stop the fixture from falling to the ground. So do NOT fix the safety cable to the same place that the "C" clamp is attached

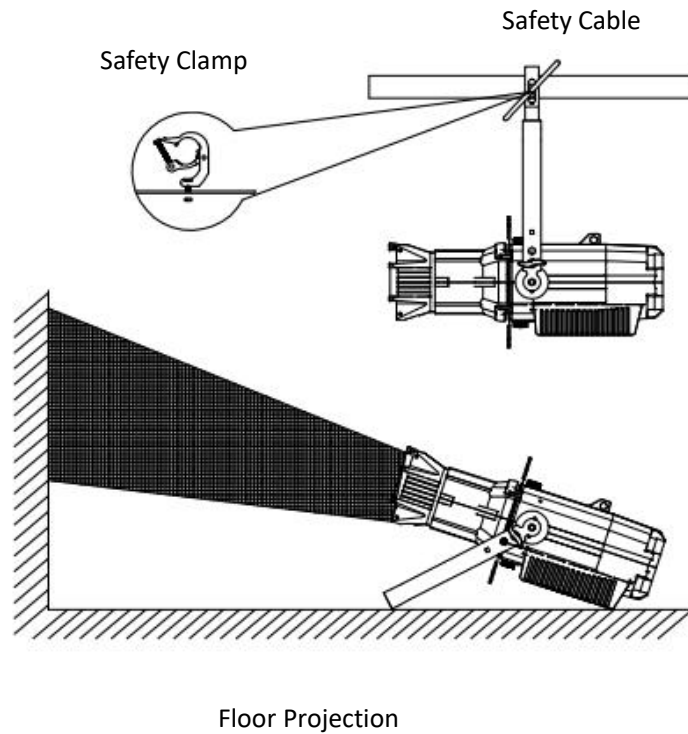

10 CLEANING AND MAINTENANCE

Now ignoring maintenance and cleaning is a very good way of creating problems "down the road" and many companies and installations do just that. However the net result is, no matter what the fixture, premature failure!

Changing the oil in a car, most people do on a regular basis.

So with the fixtures, regular maintenance is an excellent practice, if you want the fixtures to last.

So what is the maintenance for the fixture?

CLEAN THE FANS!

Turn off the led profile spotlight.

Using a small vacuum cleaner, suck the dust and "fur balls" out.

Do not use a can of CO_2 . That will just blast the dust and dirt everywhere!

The fans keep the LED cool and keep the electronics cool too.

Without the fan working efficiently and dust free, the fixtures will fail and that will be a lot more costly than having someone

vacuum the fixtures on a regular basis.

How often should the fans be cleaned? It depends on where the fixtures are; in a very dusty atmosphere once a week. So

check the fans on a regular basis, they may not need cleaned every week but a quick "visual inspection" should be done.

The front lens should be cleaned so the light output is maintained.

The shutter blades sometimes require cleaning as well.

With the led profile spotlight turned off, use only a moist lint-free cloth. Never use alcohol or solvents to clean the fixture.

Never spray anything onto the fixture at the front or in any place on the fixture.

REMARK

The product has perfect performance and integrity packing. All users should be strictly comply with the warning

and operating instructions as stated. Or we aren't in charge of any result by misusing.

Any damage resulting by misuse is not within the Company's warranty.

Any fault or problem caused by neglecting the manual is also not in the charge of dealers.

Errors and omissions for every information given in this manual excepted.

All information is subject to change without prior notice.

Thank you again for your patronage!
We will be offering sincere service as always,
Wish you have a good lighting journey!