

SACE Tmax XT

AUX-C - Contatti ausiliari 250V-24V cablati XT1-XT2-XT3-XT4 (S51; 1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)

AUX-C - XT1-XT2-XT3-XT4 wired auxiliary contacts 250V-24V (S51; 1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)



AUX-C - Hilfskontakte 250V-24V, verdrahtet XT1-XT2-XT3-XT4 (S51; 1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)

AUX-C - Contacts auxiliaires 250V-24V câblés XT1-XT2-XT3-XT4 (S51; 1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)

AUX-C - Contactos auxiliares 250V-24V cableados XT1-XT2-XT3-XT4 (S51; 1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)

AUX-C - 带导线辅助触点 250V-24V XT1-XT2-XT3-XT4(S51;1Q+1SY; 2Q+1SY; 3Q+1SY; 3Q+2SY; 2Q+2SY+1S51)

XT1-XT2-XT3-XT4

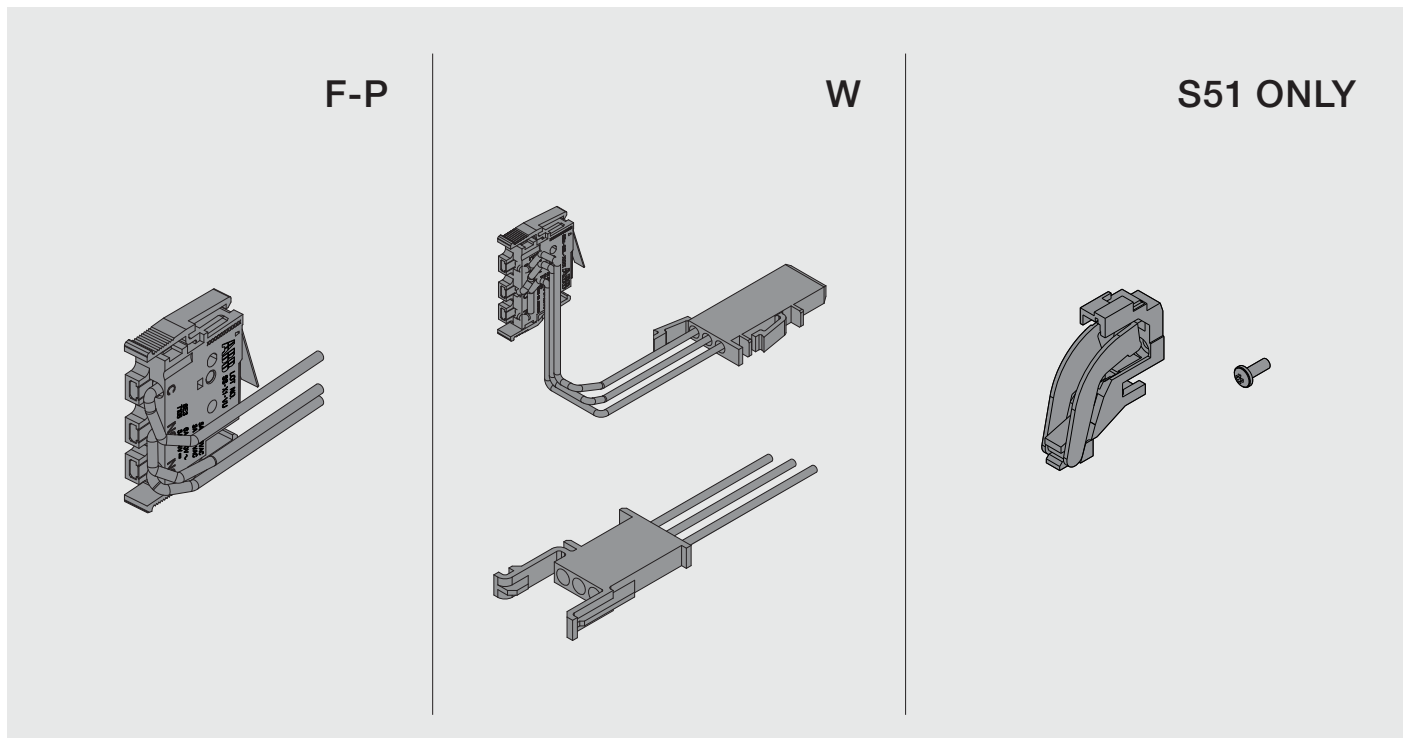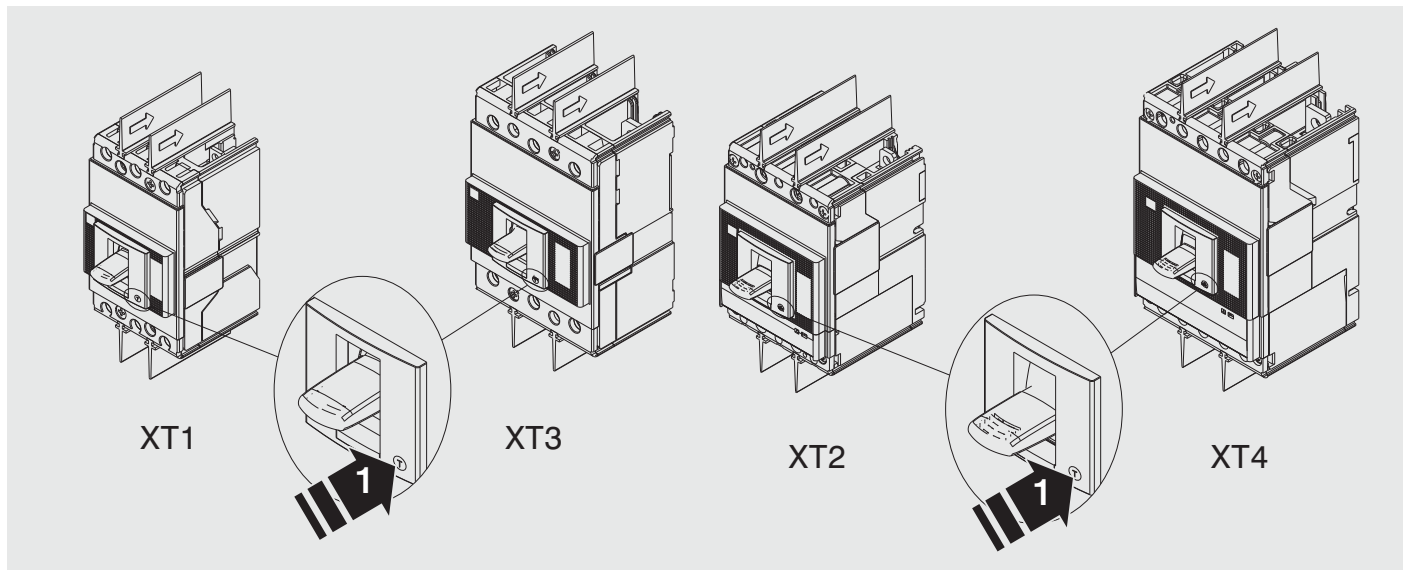

IEC60947-5-1



GB14048.5



AUX 250V, AUX-SA 250V							
IEC	Voltage	Category / Current					
		AC-15	AC-14	AC-13	DC-14	DC-13	DC-12
	250Vac	4A	5A	6A	-	-	-
	125Vac	5A	6A	6A	-	-	-
	250Vdc	-	-	-	0,03A	0,03A	0,3A
	110Vdc	-	-	-	0,05A	0,05A	0,5A

IEC	Voltage	max Current	min Current
	24Vdc	0,1A @ 30Vdc	1mA @ 5Vdc

Uimp = 2.5kV

Ui = 300V

UL	Voltage	max Current
	250Vac	3A
	125Vac	5A
	250Vdc	0.2A
	125Vdc	0.4A

UL	Voltage	max Current
	125Vac	0.1A
	30Vdc	0.1A

SY/1

SY/2

Q/1

Q/2

Q/3

S51

CAVI
CABLES
KABEL
CÂBLES
CABLES
导线

95-96-98

15-16-18

11-12-14

21-22-24

31-32-34

05-06-08

CONNETTORE (W)
CONNECTOR (W)
STECKVORRICHTUNG (W)
CONNECTEUR (W)
CONECTOR (W)
连接器(W)

JF2

JL3

JG3

JE2

JH3

JG2

F/P

XT1

XT2

XT3

XT4

1Q+1SY

OK

OK

OK

OK

2Q+1SY

OK

OK

OK

OK

3Q+1SY

NO

OK

OK

OK

3Q+2SY

NO

OK

NO

OK

2Q+2SY+1S51

NO

OK

NO

OK



1S51

NO

OK

NO

OK



1Q+1SY

SY/1+Q/2

-

-

2Q+1SY

SY/1+Q/1+Q/2

-

-

3Q+1SY

SY/1+Q/1+Q/2+Q/3

-

-

3Q+2SY

SY/1+SY/2+Q/1+Q/2+Q/3

-

-

2Q+2SY+1S51

SY/1+SY/2+Q/2+Q/3+S51

1

1


1S51

S51

1


1

W

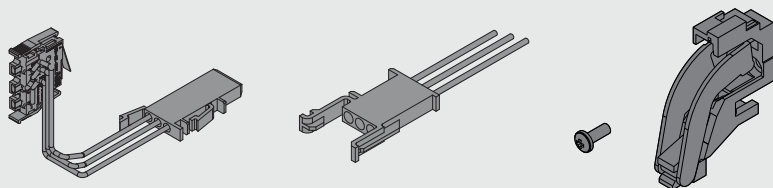


	XT2	XT4					
1Q+1SY	OK	OK	1Q+1SY	SY/1+Q/2	2(JE2+JF2)	-	-
3Q+1SY	OK	OK	3Q+1SY	SY/1+Q/1+Q/2+Q/3	4(JE2+JF2+JG3+JH3)	-	-
3Q+2SY	OK	OK	3Q+2SY	SY/1+SY/2+Q/1+Q/2+Q/3	5(JE2+JF2+JG3+JH3+JL3)	-	-
2Q+2SY+1S51	OK	OK	2Q+2SY+1S51	SY/1+SY/2+Q/2+Q/3+S51	5(JE2+JF2+JG2+JH3+JL3)	1	1
1S51	OK	OK	1S51	S51	1(JG2)	1	1


1 ONLY FOR XT1 F - XT3 F

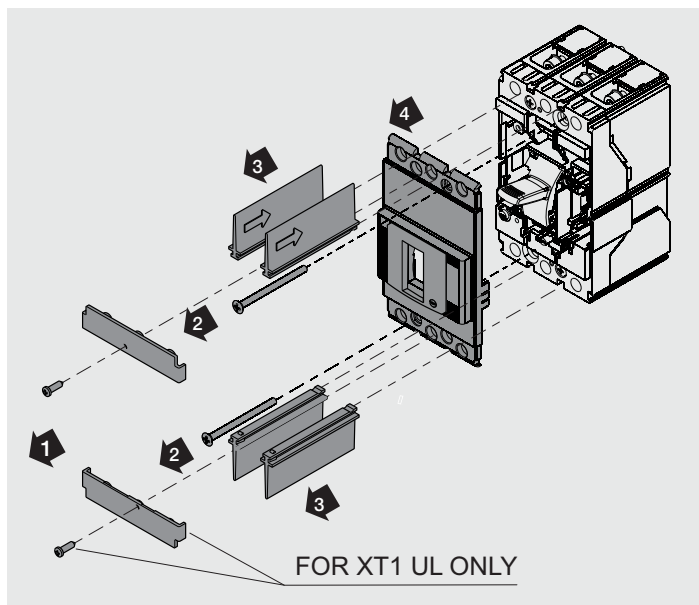


2 ONLY FOR XT2 F- XT4 F

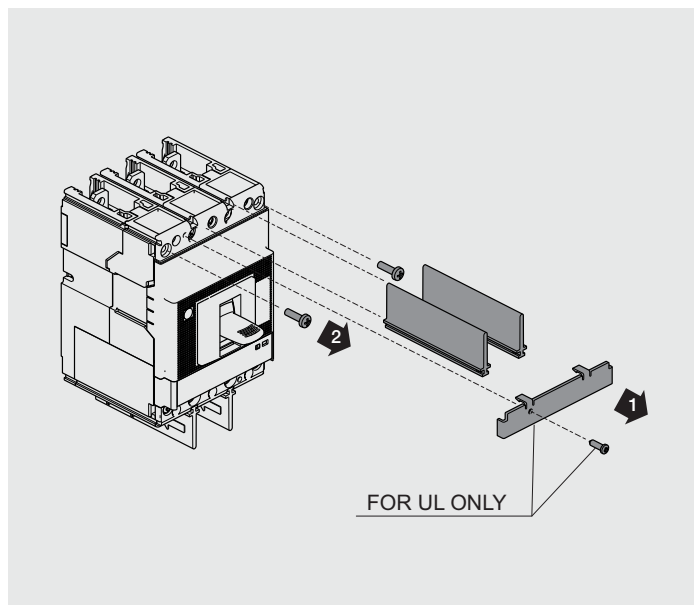

3 ONLY FOR XT2 F/P - XT4 F/P

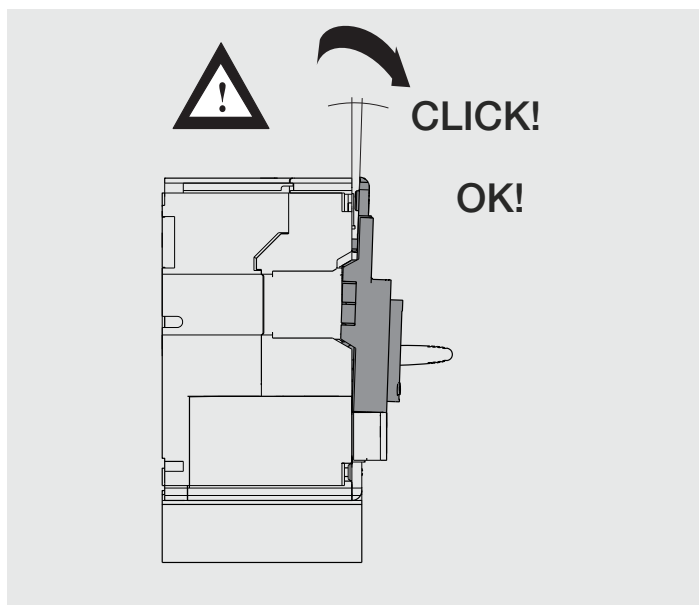


4 ONLY FOR XT2 F/P - XT4 F/P

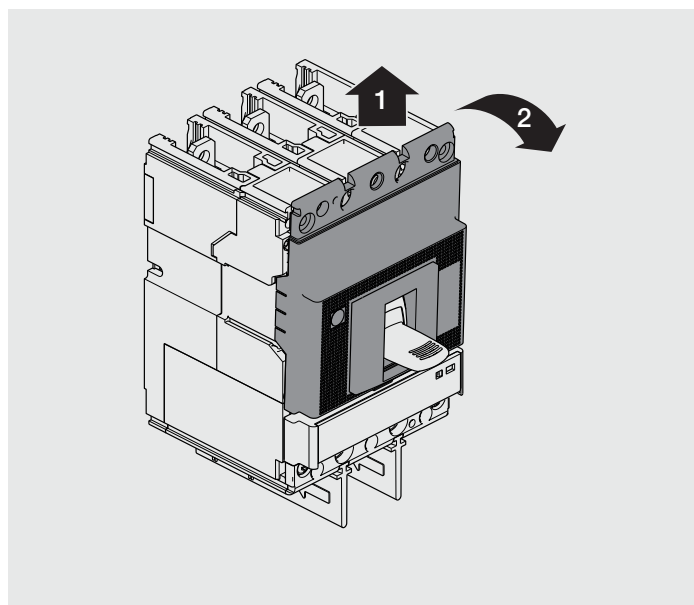


5

XT1/F-P

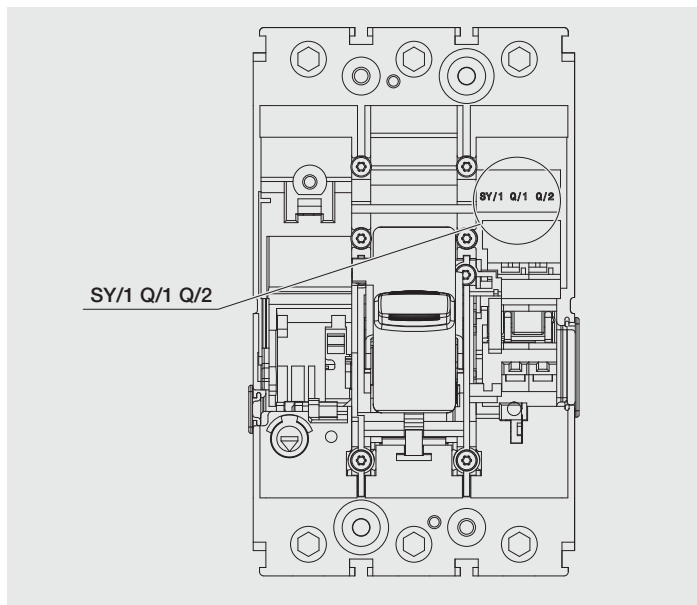


6

XT1/F-P

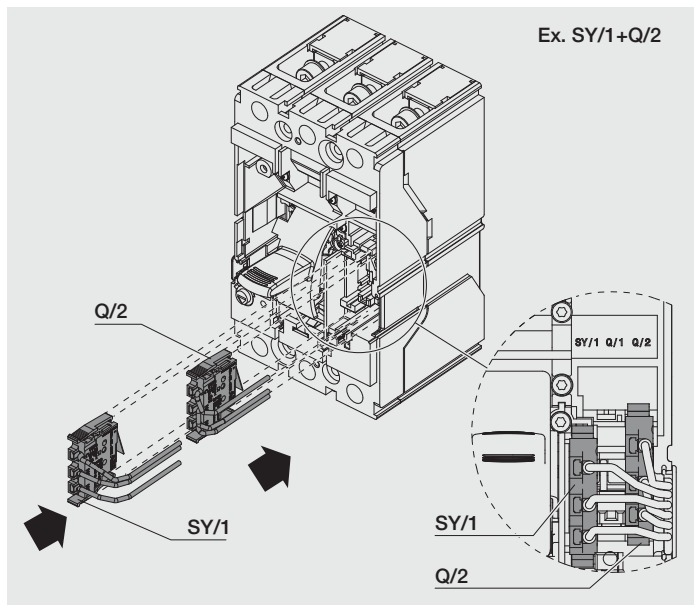


7

XT3/F-P

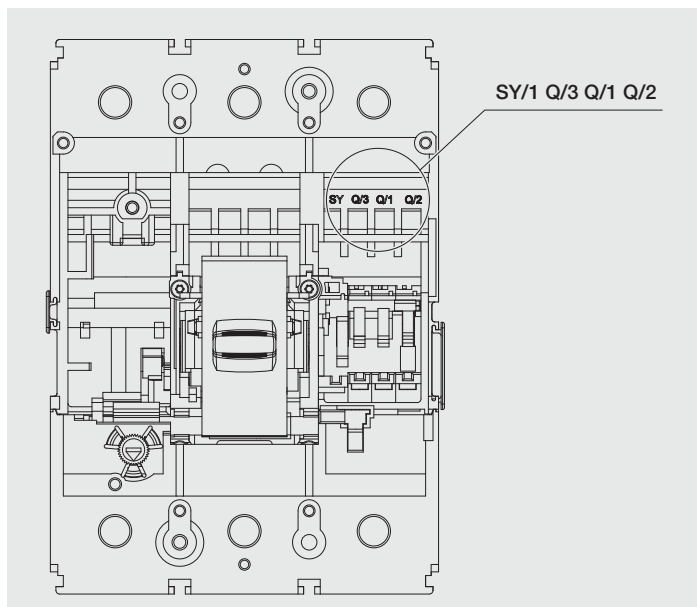


8

XT3/F-P

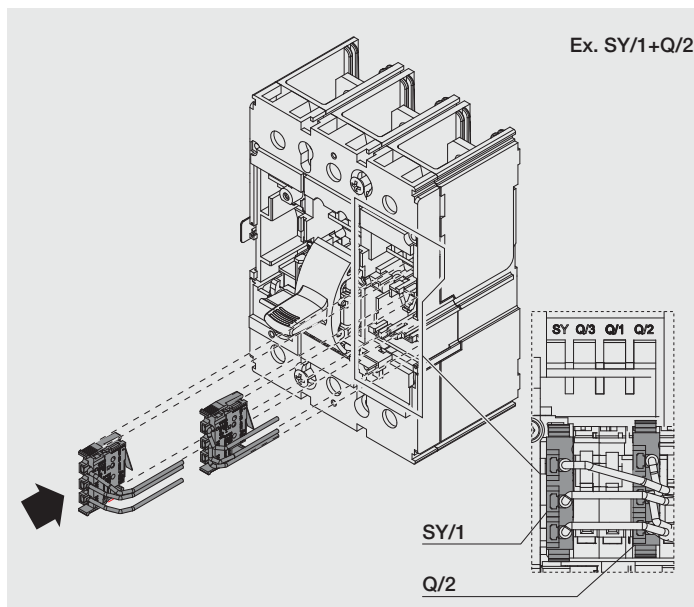


9

XT1-XT3/F-P

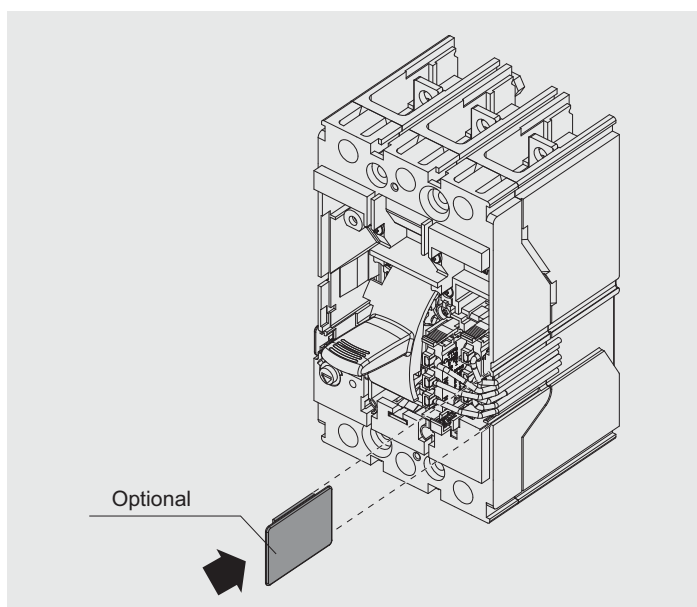


10

XT2-XT4/F-P

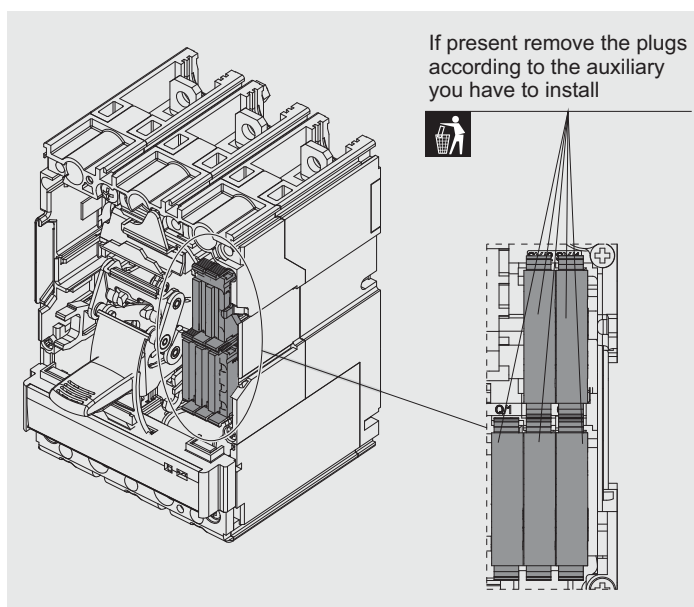


11

XT2-XT4/F-P

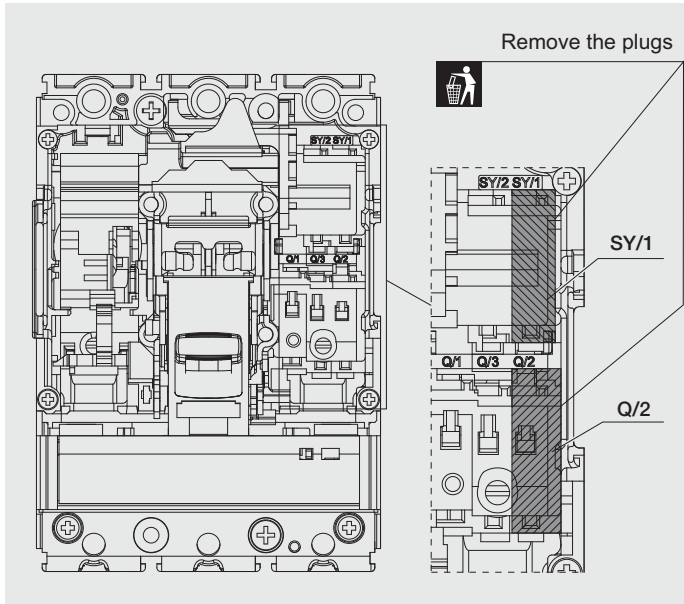


12

XT2-XT4/F-P

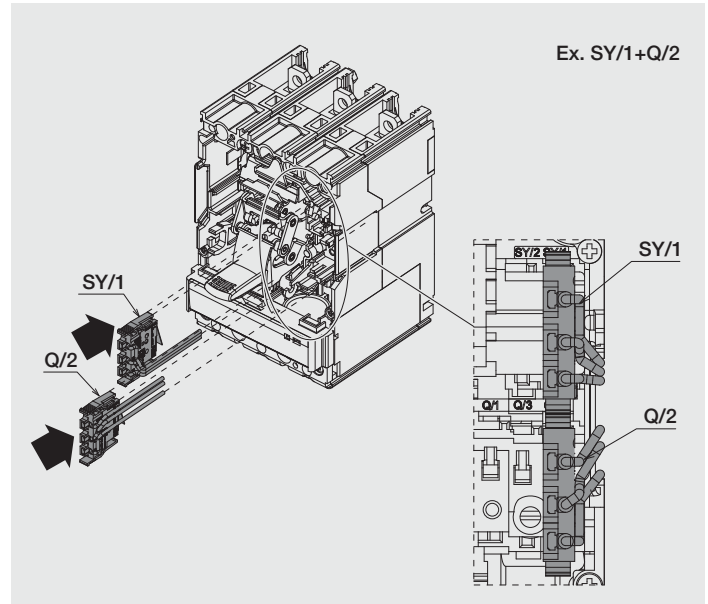


13

XT2-XT4/F-P

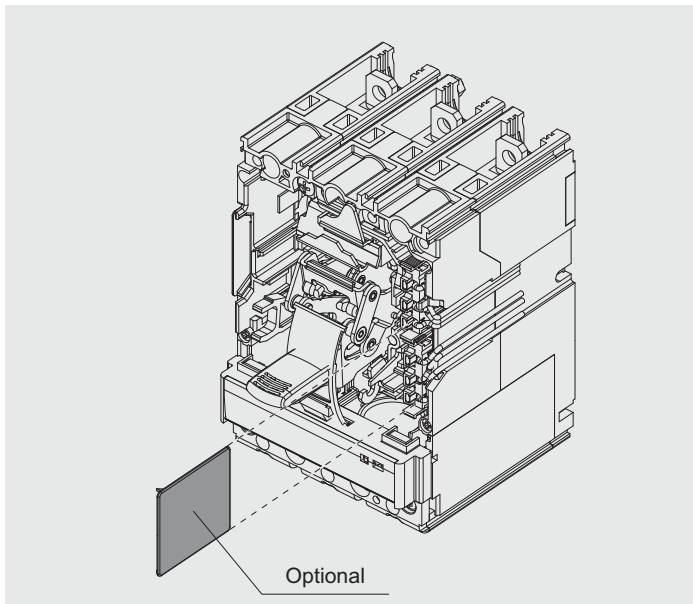


14

XT2-XT4/F-P

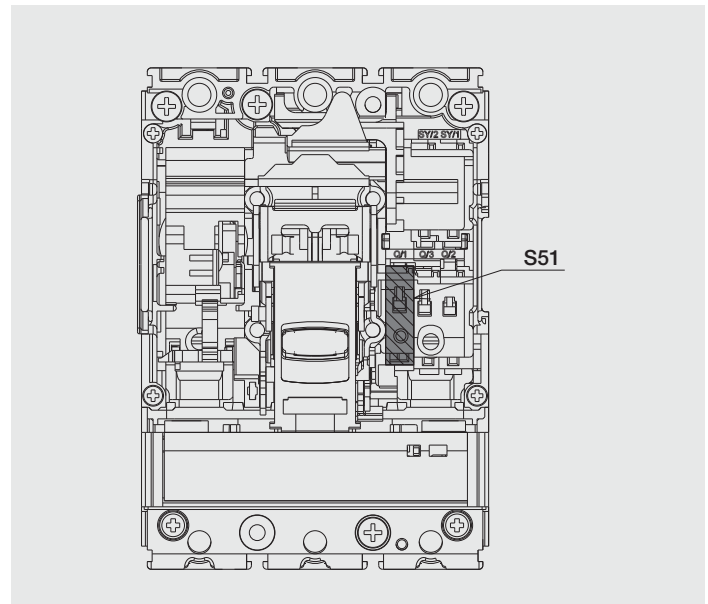


15


XT2-XT4/F-P

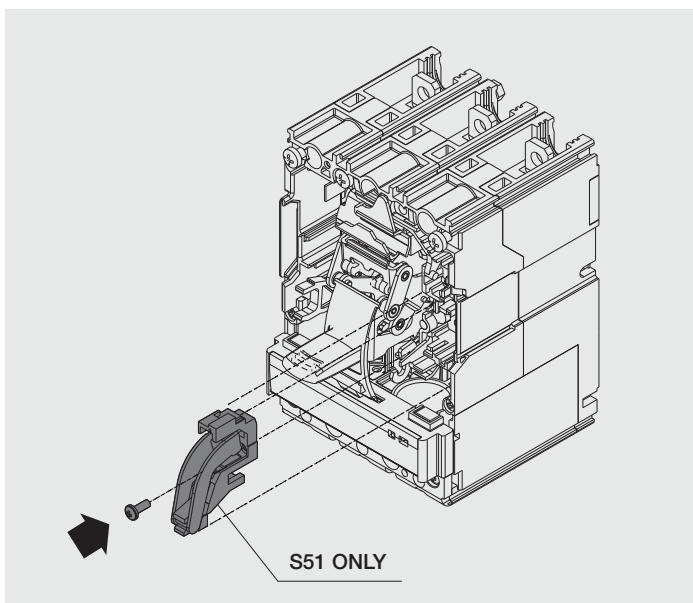

16


XT2-XT4/F-P

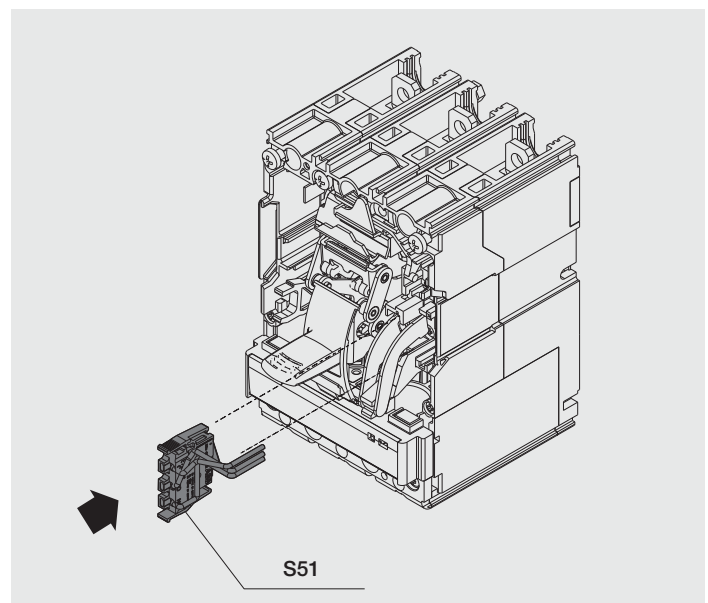

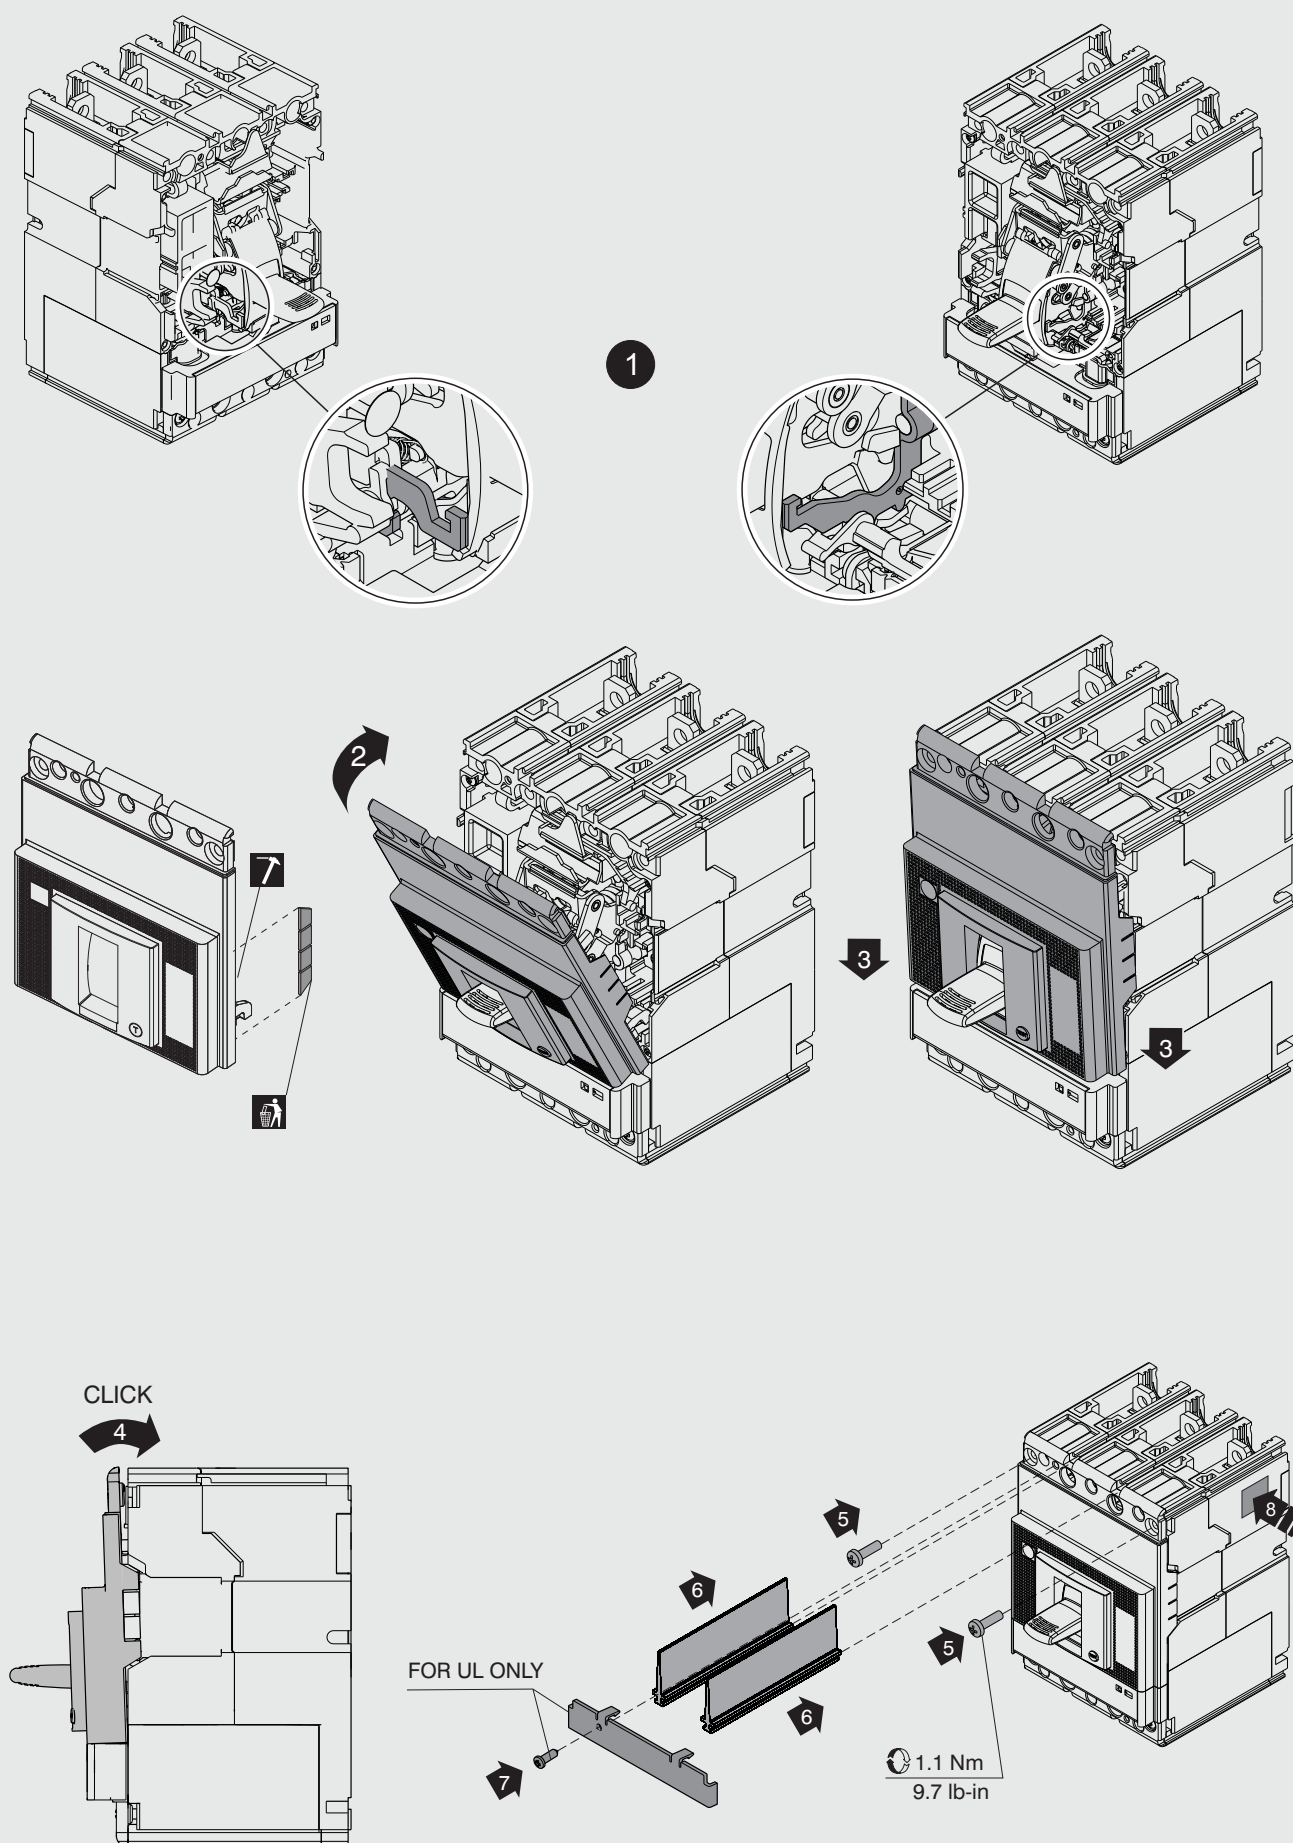


18

XT2-XT4/W

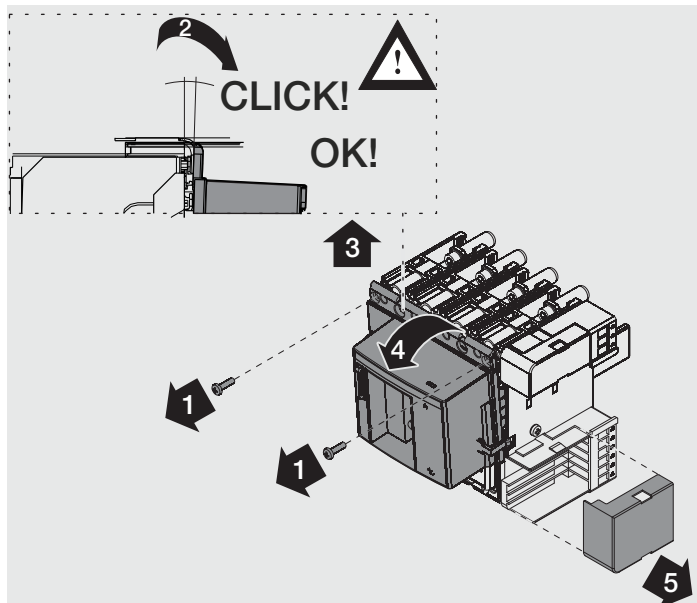

19


XT2-XT4/W

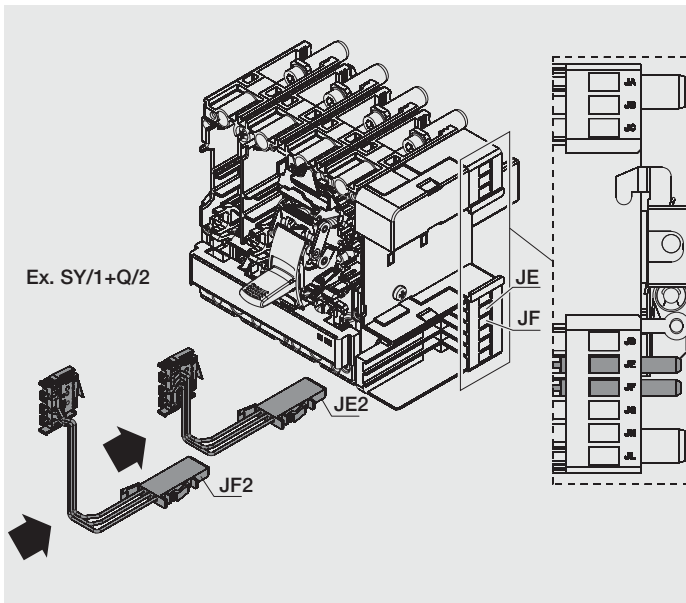

20

XT2-XT4/W


Ex. SY/1+Q/2

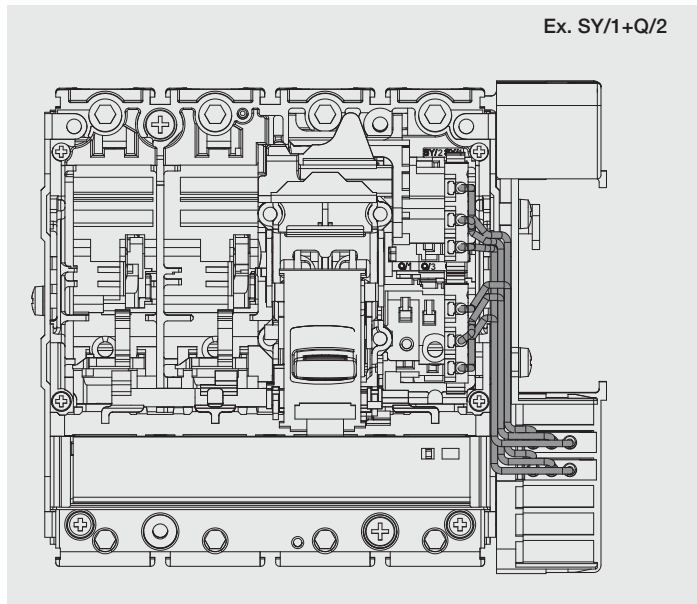

21

XT2-XT4/W


Ex. S51 only

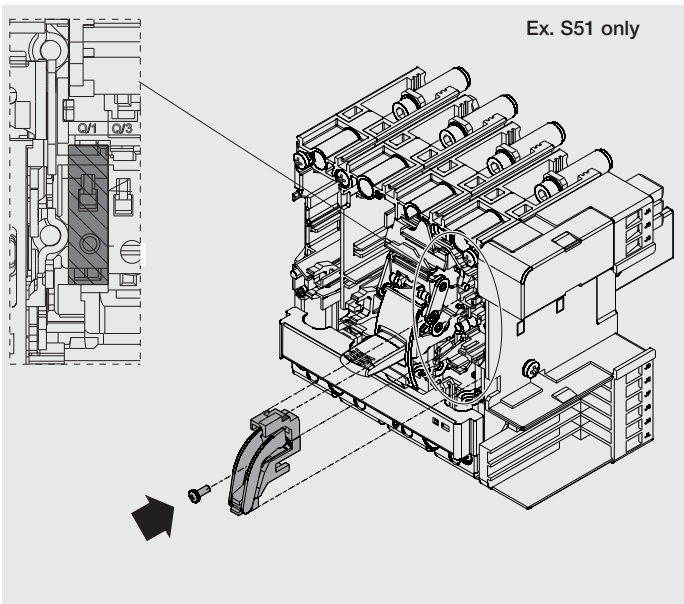

22

XT2-XT4/W


Ex. S51 only

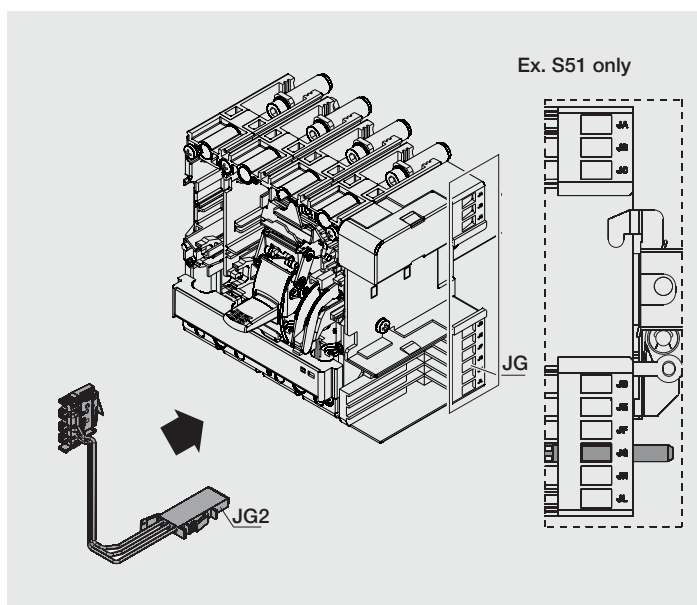

23


XT2-XT4/W

Ex. S51 only

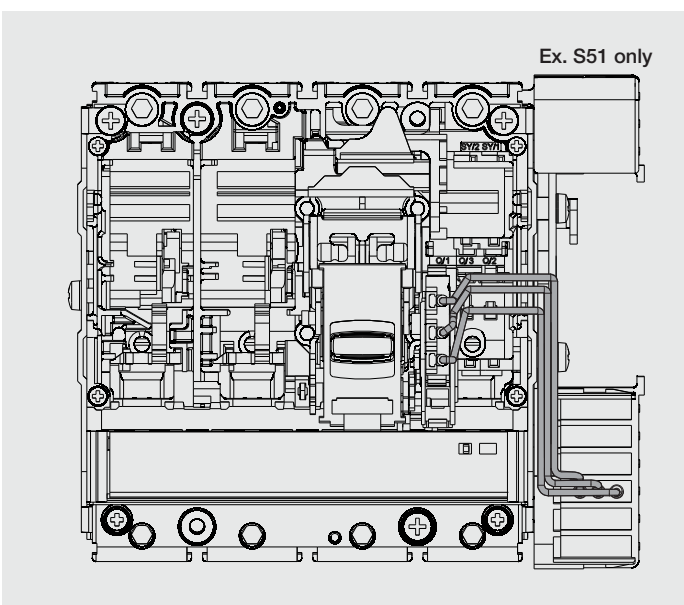


24

XT2-XT4/W

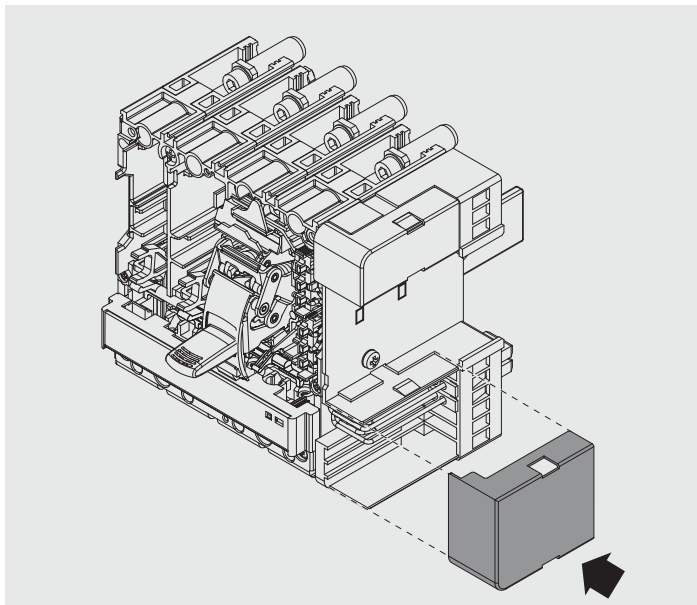



25

XT2-XT4/W

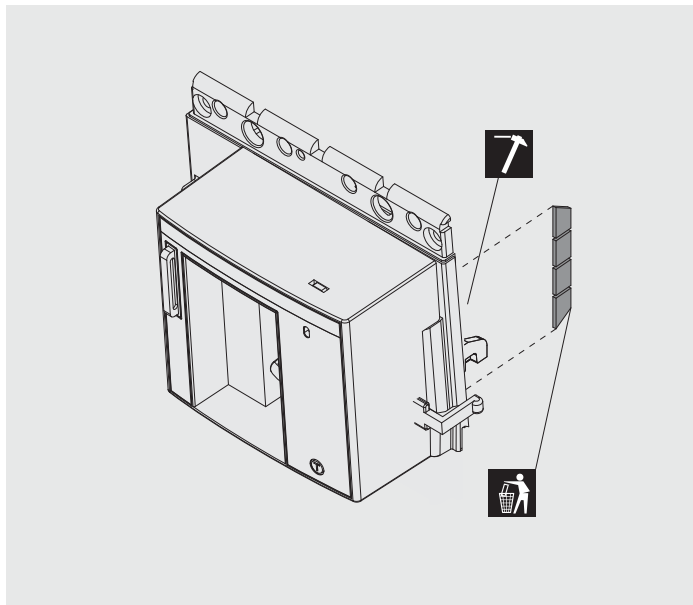


26

XT2-XT4/W

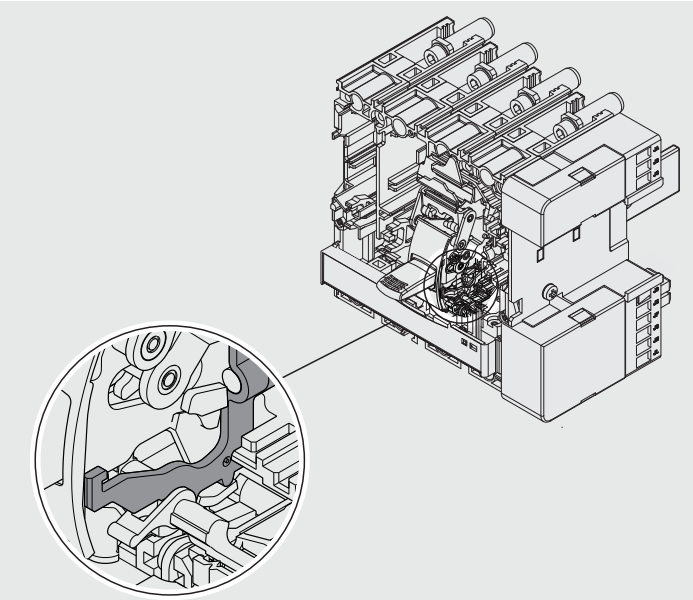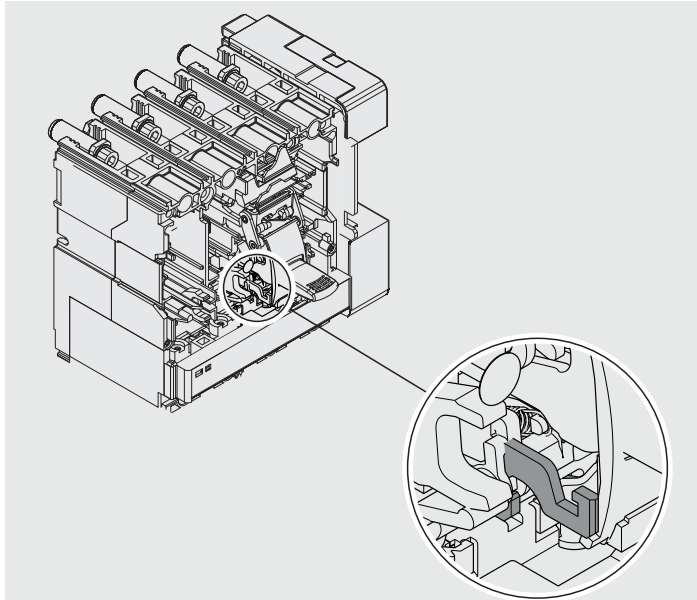


27

XT2-XT4/W


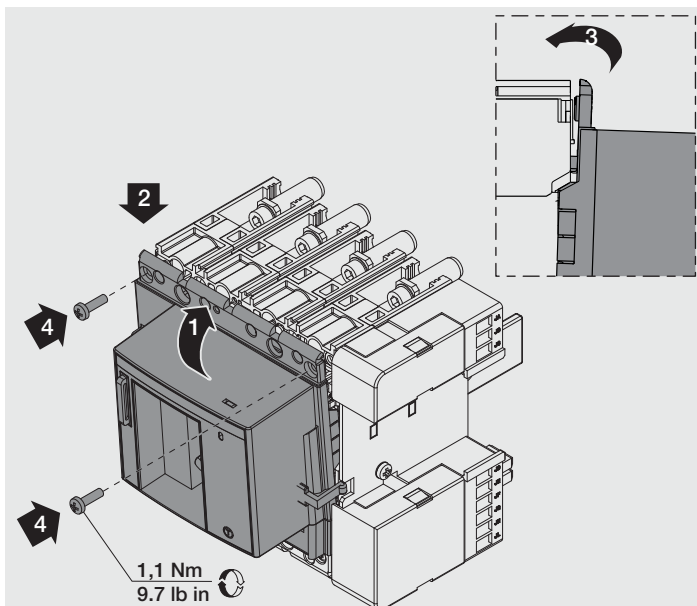


28

XT2-XT4/W

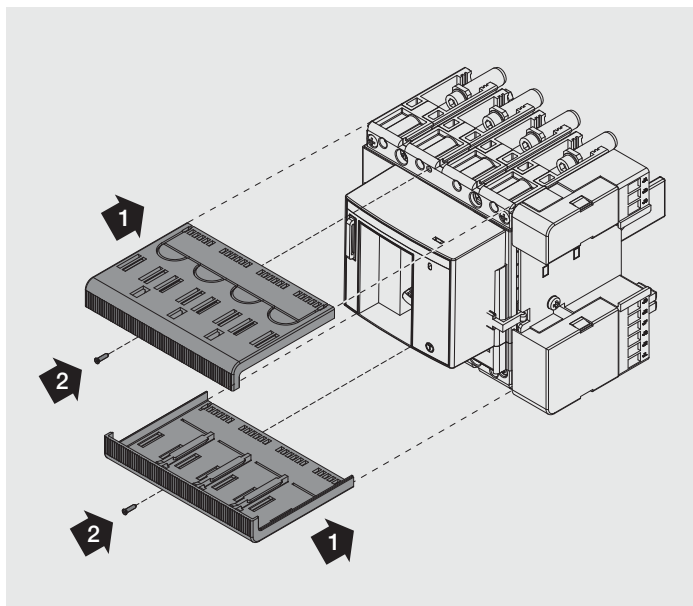

Ex. SY/1+Q/2

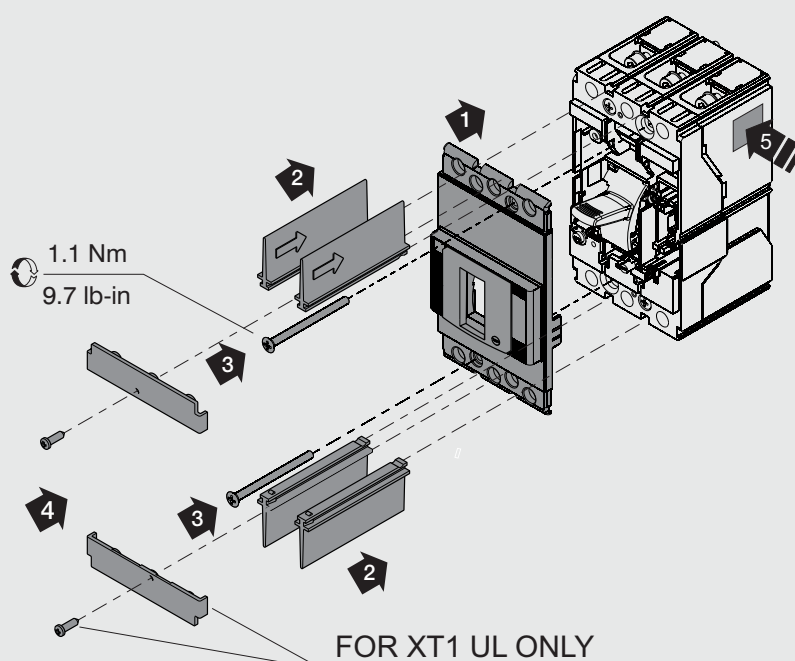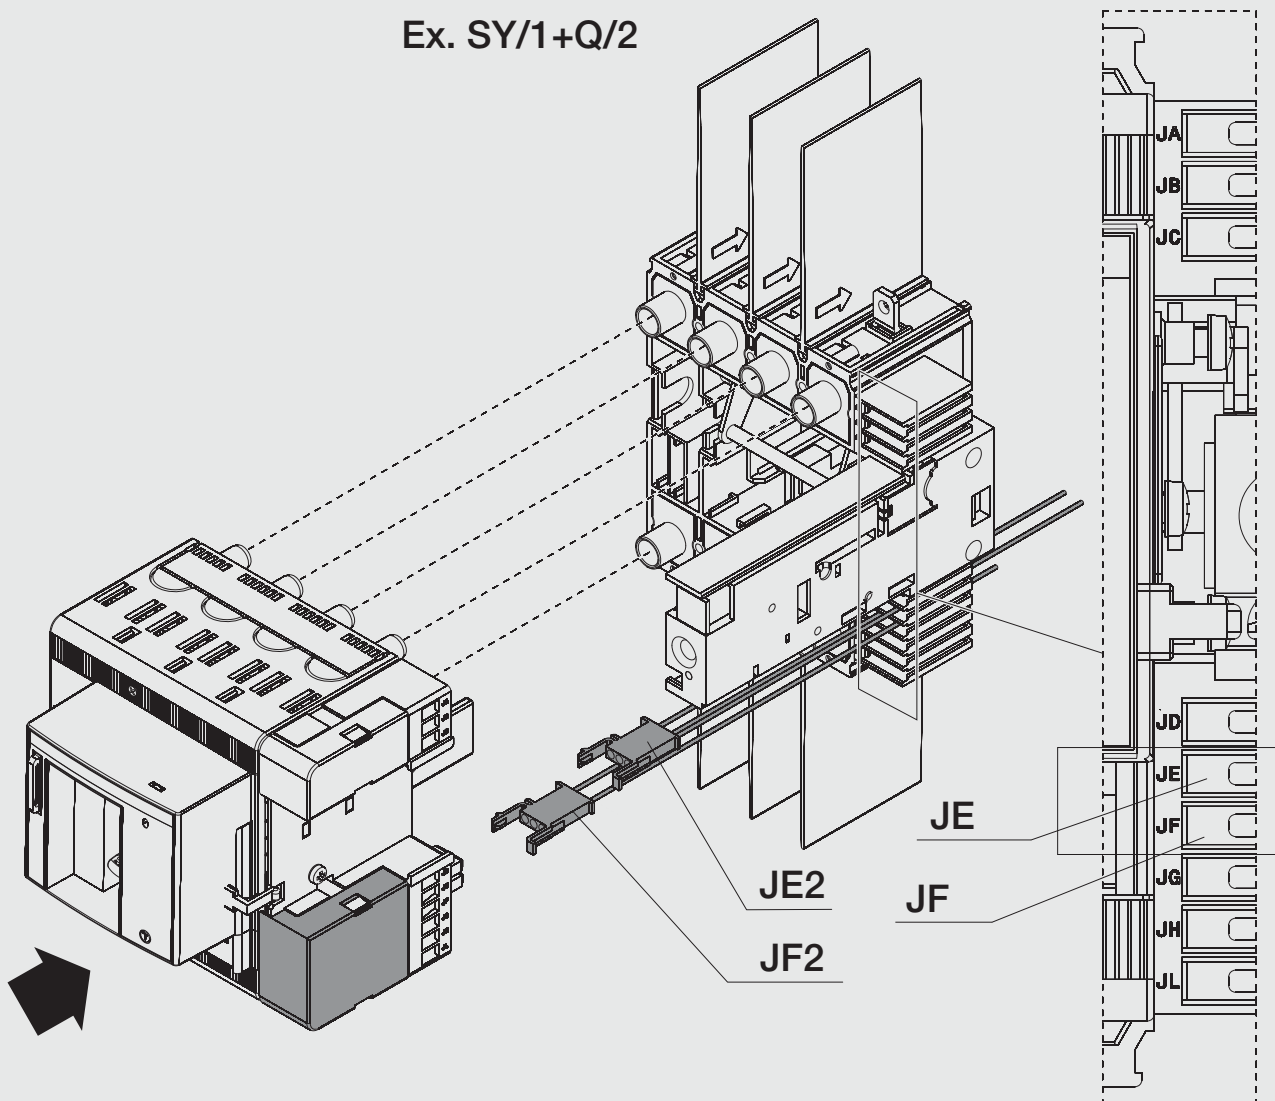

*E)

