

# Slim Downlight Series: Round Baffle

Cat. Nos. DBR40, DBR60, and DBR80

Ratings: 120V, 60 Hz

**LEVITON**®

## WARNINGS:

- **TO AVOID FIRE, SHOCK OR DEATH: TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!**
- **TO AVOID SHOCK OR ELECTROCUTION**, ground the fixture.
- To be installed by an electrician in accordance with all applicable electrical codes and regulations.
- Supply conductors (power wires) connecting the fixture must be rated at minimum of 90°C.
- Wear rubber soled shoes and work on a sturdy wooden or nonconductive ladder.
- To prevent damage to the wiring, do not expose wiring to edges of sheet metal or other sharp objects.
- Installing contrary to instructions may cause unsafe conditions.

## CAUTIONS:

- Product must be mounted in locations and at heights and in a manner consistent with its intended use, in compliance with NEC standards, and local codes and where it will not readily be subject to tampering by unauthorized personnel. In Canada, product must be mounted in compliance with CEC standards.
- This device is not intended for use with emergency exits.
- Do not exceed the input rating of the luminaire
- No user serviceable components. **DO NOT** attempt to service or repair.
- Connect to a 120V 60Hz power source only; any other connection will void the warranty.

PK-A3495-10-03-6A


## INSTALLATION INSTRUCTIONS

**ENGLISH**

### Installation

**WARNING: TO AVOID FIRE, SHOCK OR DEATH: TURN OFF POWER SUPPLYING THIS EQUIPMENT AND CONFIRM POWER IS OFF**, before installing, removing or servicing this equipment.


1. Using the included template, mark and cut an opening in the ceiling.



2. Remove junction box knock-outs for wiring and open the junction box.


**NOTE:** The junction box contains three wires: Hot (BLACK), Neutral (WHITE), and Ground (GREEN).

#### Quick Connect Cable to Luminaire

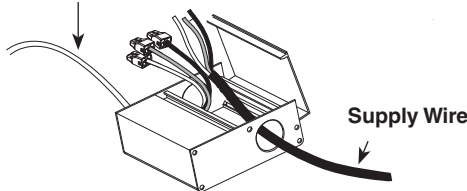


3. Connect supply wires to junction box wires (GREEN to GREEN, BLACK to BLACK, WHITE to WHITE).


4. Connect downlight to junction box with the quick-connect cable. Select the color temperature (CCT) using the 5CCT switch on the junction box. Then, place the junction box into the ceiling.

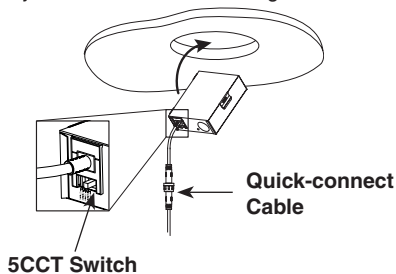

5. Push "Easy Mount" clips on the luminaire.

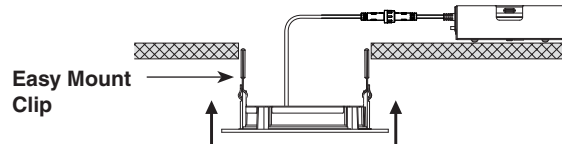


6. Insert downlight into the ceiling and release clips to secure the downlight in the ceiling.

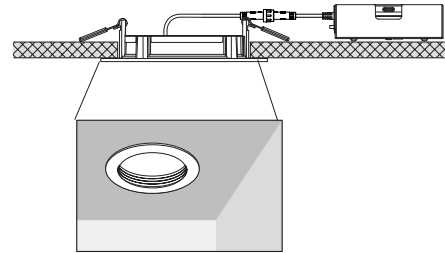

7. The New Construction Plate can be used to provide extra support for a variety of sizes (4, 6 and 8 inch). Select the luminaire hole size by matching the luminaire to the rings on the frame kit and select the ring that is slightly smaller than the outer diameter of the fixture.

8. Using a pair of cutters, cut the ring out that corresponds to the luminaire being installed. Lay the frame kit on the ceiling joist in the desired location and secure to joists.

**NOTE:** Allow enough space for the Junction Box mounted on the Mounting Plate

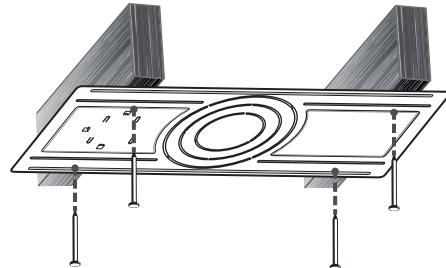

Patents covering this product, if any, can be found on [leviton.com/patents](http://leviton.com/patents).

LEVITON and the Leviton logo are trademarks of Leviton Manufacturing Co., Inc., and are registered trademarks in many countries throughout the world.

### FOR CANADA ONLY

For warranty information and/or product returns, residents of Canada should contact Leviton in writing at **Leviton Manufacturing of Canada ULC** to the attention of the **Quality Assurance Department**, 165 Hymus Blvd, Pointe-Claire (Quebec), Canada H9R 1E9 or by telephone at 1-800-405-5320.

### LIMITED 5 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for five years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option. **For details visit [www.leviton.com](http://www.leviton.com) or call 1-800-824-3005.** This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. **There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose**, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to five years. **Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation.** The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

For Technical Assistance Call: 1-800-824-3005 (USA Only) or 1-800-405-5320 (Canada Only)  
[www.leviton.com](http://www.leviton.com)