

# Installation Instruction

## Temporary Work Light

### 150 W LED Temporary High Bay



Read the installation instructions and all product labels before proceeding with the installation. This product must be installed in full accordance with applicable electrical and building codes.

**TO PREVENT ELECTRICAL SHOCK, POWER SHOULD BE TURNED OFF FROM THE ELECTRICAL PANEL BEFORE INSTALLATION OR MAINTENANCE.**

#### SAFETY WARNINGS

- To reduce the risk of fire and electrical shock, do not exceed the maximum wattage, including any additional string loads.
- Suitable for use in damp locations.
- Do not submerge.
- Four units maximum can be daisy chained.
- Do not connect or disconnect when wet.
- Do not open – no user serviceable inside.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Operating Temperature: -30°C / -22°F to 40°C / 104°F
- 5 year limited warranty.

-----

#### PRODUCT SPECIFICATIONS

Voltage	120 V
Wattage	150 W
Light Output	15 000 lm
Power cord length	20 ft (6.1 m)
Wire	18 AWG
CRI	80
Amperage	1.3 A
IP Rating	IP54

# Installation Instruction

## Temporary Work Light

### 150 W LED Temporary High Bay



#### INSTALLATION - STEPS

1. Turn OFF the power before proceeding with the installation.
2. Hang the luminaire where desired, using the designated hook on the handle. Ensure that it can handle a weight of 66 lbs. (Fig. 1)
3. You must use the safety rope to tight the luminaire.
4. Plug the luminaire into the outlet and turn on the power (AC 120 V). The LED Temporary High Bay can be turned ON and OFF using the wireless remote control.
5. Close the cap if no needs to daisy chain other luminaires. (Fig. 2)
6. To daisy chain two (up to four) luminaires together, open the cap and connect the plug in the socket. Once the second luminaire is plugged into the first one, rotate the buckle from the first luminaire, to make sure the connection is more firm. (Fig. 3)

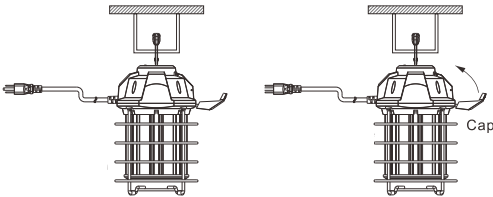


Fig. 1

Fig. 2

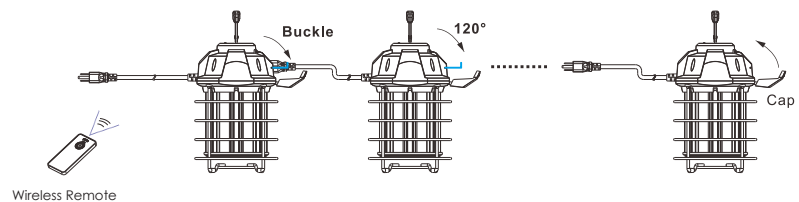


Fig. 3