

Straight Blade Devices
15A, 125V, 2 Pole, 3 Wire Grounding
Commercial Specification Grade Duplex
Receptacles



Features

- Tamper-resistant shutter complies with national electrical code requirements
- Smooth face
- Wrap-around galvanized steel straps
- Triple wipe contacts

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|--|--------------|--------------|----------------|
| Tamper-Resistant, back and side wired, smooth face | Black | 783585144061 | BR15BLKTR |

Listings


UL Listed to UL498 File No. E2186 File No. E2186
Certified to CSA C22.2, No. 42
NEMA® WD-6 Compliant

Specifications

| | |
|---------------------------------|------------------------------------|
| Face | Nylon |
| Base | Nylon |
| Power Contacts | .030 in. (.8) Brass |
| Ground Contacts | Brass |
| Wire Clamp | .062 in. (1.6) Nickel plated steel |
| Terminal Screws | Plated steel |
| Mounting Strap | .040 in. (1) Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Galvanized Steel |

Performance

| | |
|-------------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #14-#10 AWG copper stranded or solid conductor only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |
| Environmental | |
| Flammability | UL 94 V-2 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

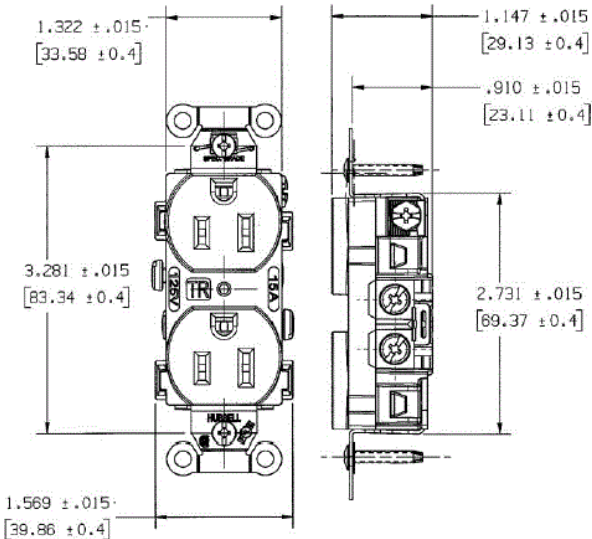

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing
eCatalog

